



# User Manual

## 4G LTE AX300 Wi-Fi 6 USB Adapter

DWM-222W

---

# Preface

D-Link reserves the right to revise this publication and to make changes in the content hereof without obligation to notify any person or organization of such revisions or changes.

## Manual Revisions

Revision	Date	Description
1.01	September 30, 2025	Updated Version

## Trademarks

D-Link and the D-Link logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States or other countries. All other company or product names mentioned herein are trademarks or registered trademarks of their respective companies.

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Apple®, Apple logo®, Safari®, iPhone®, and Macintosh® are trademarks of Apple Inc., registered in the U.S. and other countries. App Store<sup>SM</sup> is a service mark of Apple Inc.

Chrome™ browser, Google Play™ and Android™ are trademarks of Google Inc.

Google, Nest Hub, and Google Home are trademarks of Google LLC.

Internet Explorer®, Windows® and the Windows logo are trademarks of the Microsoft group of companies.

Copyright © 2025 by D-Link Corporation, Inc.


All rights reserved. This publication may not be reproduced, in whole or in part, without prior expressed written permission from D-Link Corporation, Inc.

# Table of Contents

<b>Product Overview</b> .....	<b>1</b>	DHCP Settings.....	21
Package Contents.....	1	Connected Devices .....	22
System Requirements .....	2	Device Traffic .....	22
Introduction .....	3	Network Activity .....	22
Hardware Overview .....	4	Custom Firewall Rules .....	22
Front View.....	4	Port Forwarding .....	23
Back View .....	4	SMS .....	24
<b>Hardware Installation</b> .....	<b>5</b>	SMS Settings.....	24
Initial Setup.....	5	Device Inbox.....	24
Wireless Installation Considerations.....	6	Device Outbox .....	24
<b>Configuration</b> .....	<b>7</b>	SIM SMS.....	25
Initial Connection to the Wi-Fi Network.....	7	Drafts.....	25
Connect via USB.....	7	Wireless .....	26
Connect via Wi-Fi .....	8	Wireless Settings.....	26
Web-based Configuration .....	10	Wireless Security Settings.....	26
Configuration Utility.....	11	Wireless MAC Filters .....	27
Quick Setup .....	12	Router .....	28
Dashboard.....	14	User Management.....	28
Internet.....	17	Configuration Management.....	28
Internet Connection .....	17	Software Upgrade .....	29
Traffic Statistics .....	18	<b>Connect a Wireless Client to Your Network</b> .....	<b>30</b>
PIN Management .....	18	WPS Utility.....	30
Traffic Setting .....	19	<b>Troubleshooting</b> .....	<b>31</b>
USSD.....	20	<b>Networking Basics</b> .....	<b>32</b>
APN Settings.....	20	Check your IP address.....	32
Band Selection .....	20	<b>Technical Specifications</b> .....	<b>33</b>
Home Network .....	21		

# Product Overview

## Package Contents



4G LTE AX300 Wi-Fi 6 USB Adapter



Quick Installation Guide

If any of the above items are missing or damaged, please contact your reseller.

# System Requirements

<b>Network Requirements</b>	<ul style="list-style-type: none"><li>• A compatible nano SIM/UICC card with mobile data service<sup>1</sup></li></ul>
<b>Web-based Configuration Utility Requirements</b>	<p><b>Computer with the following:</b></p> <ul style="list-style-type: none"><li>• Windows®, Macintosh, or Linux-based operating system</li><li>• An installed Wi-Fi interface</li></ul> <p><b>Browser Requirements:</b></p> <ul style="list-style-type: none"><li>• Microsoft Edge</li><li>• Mozilla Firefox 28 or higher</li><li>• Apple Safari 6 or higher</li><li>• Google Chrome 28 or higher</li></ul>

<sup>1</sup> Subject to services and service terms available from your carrier.

# Introduction

The DWM-222W delivers reliable, on-the-go Internet access in a compact, lightweight design. It's perfect for staying connected anywhere, allowing up to eight devices to share a 4G network via its built-in Wi-Fi.

## Your Mobile Internet Service, Anywhere

The sleek, lightweight DWM-222W makes staying connected on the go effortless. Engineered for both reliability and portability, it gets all your gadgets and smart devices online via a single mobile Internet connection, offering Wi-Fi 6 (Wireless AX) speeds of 300 Mbps\* for a high-performance, responsive connection wherever you are.

## Simple to Set Up with Built-in Software

Getting online with the DWM-222W is fast and effortless thanks to its true plug-and-play design. Just insert your 4G/LTE nano SIM card to create a mobile Wi-Fi hotspot instantly. In contrast to conventional USB dongles that provide connectivity to a single host device, the DWM-222W supports multi-device access by sharing the 4G mobile data connection over Wi-Fi, allowing nearby users to connect simultaneously.

## Designed for Travel Convenience

Forget expensive roaming fees! The DWM-222W provides reliable Internet access wherever you are, empowering you to control smart home devices remotely or collaborate with colleagues online.

\*All references to speed are for comparison purposes only. Actual speeds will vary depending on a range of factors including mobile network coverage, signal strength, network activity, and environmental conditions.

# Hardware Overview

## Front View



## Back View



<b>1</b>	<b>LED Indicator</b>	Status display. Please refer to <b>LED Behavior</b> on the right side.
<b>2</b>	<b>USB Connector</b>	Open the lid and insert the USB Type-A connector to your laptop to enjoy instant mobile connectivity.
<b>3</b>	<b>Reset Button</b>	To reset the device to its factory default settings, use a pointed object to press and hold the reset button for 8 seconds (when the LED starts flashing).

<b>LED Behavior</b>	<b>Description</b>
<b>Blinking Red</b>	<ul style="list-style-type: none"> <li>No Internet service.</li> <li>Device error detected.</li> </ul>
<b>Blinking Blue</b>	Registering to an LTE network.
<b>Solid Blue</b>	Connected to an LTE network successfully.
<b>Blinking Green</b>	Registering to a 3G network.
<b>Solid Green</b>	Connected to a 3G network successfully.

# Hardware Installation


This section will guide you through the installation process.

## Initial Setup

### Install a SIM Card

1. Slide the cover lid.
2. Slide the cover by following the direction indicated by the arrow on the back of the device.
3. Follow the arrow on the cover to open the SIM card holder and release it.
4. Insert the nano SIM card (4FF), making sure it is oriented correctly by aligning it with the notch in one corner.
5. Close the card holder.
6. Close the back cover. Before closing the back cover, notice the Wi-Fi SSID and Key printed on the product label. You will need this information if you would like to connect to the device via Wi-Fi for the first time.

**Note:** Always unplug the device before installing or removing the SIM card. Never insert or remove the SIM card while the device is in use.

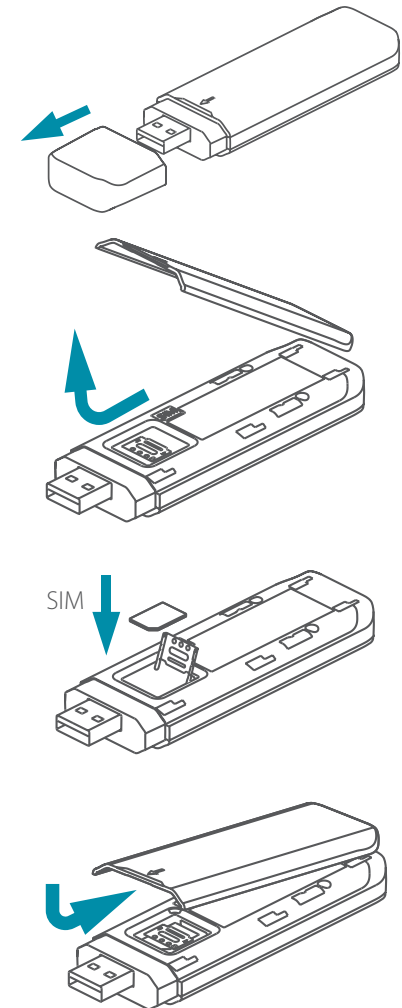

# Wireless Installation Considerations

The DWM-222W can be accessed using a wireless connection from anywhere within the operating range of its wireless network. Keep in mind that the quantity, thickness, and location of walls, ceilings, or other objects that the wireless signals must pass through may adversely affect wireless signals. Ranges vary depending on the types of materials and background RF (Radio Frequency) noise in your home or office. The key to maximizing the wireless range is to follow these basic guidelines:

1. Minimize the number of walls and ceilings between the adapter and other network devices. Each wall or ceiling can reduce your adapter's range from 1 to 30 meters (3 to 90 feet).
2. Be aware of the direct line between network devices. A wall that is 0.5 meters (1.5 feet thick) appears to be almost 1 meter (3 feet) thick at a 45-degree angle. At a 2-degree angle it appears over 14 meters (42 feet) thick. Position devices so that the signal will travel straight through a wall or ceiling (instead of at an angle) for better reception.
3. Try to position access points, wireless routers, and computers so that the signal passes through open doorways. Materials such as glass, metal, brick, insulation, concrete, and water can affect wireless performance. Large objects such as fish tanks, mirrors, file cabinets, metal doors, and aluminum studs may also have a negative effect on range.
4. If you are using a 2.4 GHz cordless phone, make sure that the 2.4 GHz phone base is as far away from your wireless device as possible. The base transmits a signal even when the phone is not in use. In some cases, cordless phones, X-10 wireless devices, and electronic equipment such as ceiling fans, fluorescent lights, and home security systems may dramatically degrade wireless connectivity.

# Configuration

This section will show you how to configure your DWM-222W using the configuration utility that can be accessed via your web browser.

## Initial Connection to the Adapter

By default, the DWM-222W comes configured to work with most 4G/3G SIM cards. Simply connect to it via Wi-Fi or insert the adapter to your laptop to access the Internet connection through your mobile data plan. If you wish to configure the Wi-Fi network, you will need to establish a direct connection with the adapter in order to access the web-based configuration utility. For more information, please refer to the below sections. Once you have configured your Wi-Fi network, you will be able to connect to the Internet using the Wi-Fi settings that you specified in the configuration process. Please ensure that the adapter is detected by your laptop before commencing the setup process.

### Connect via USB

To connect the adapter via USB, open the lid and insert the USB connector into an available USB port on your laptop. Wait for about 5 to 8 seconds until the LED turns green or blue, then you can access the Internet.


## Connect via Wi-Fi

**Note:** Please refer to the documentation that came with your operating system or wireless client for further information on how to connect to a wireless network.


To connect to DWM-222W using Wi-Fi, open your operating system's wireless networking utility and scan for available networks to connect to. The default SSID and password can also be found on the product label attached to the device.



Once you have located your DWM-222W's wireless network, select it and click **Connect**.

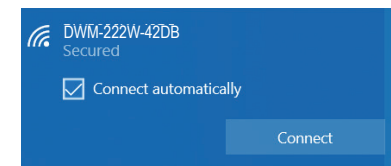

You will then be prompted to enter the network security key for your device. Enter the security key in the box provided and click **OK**. Your wireless connection utility will confirm that the connection is successful, and you can move to the next step to continue to the configuration process.

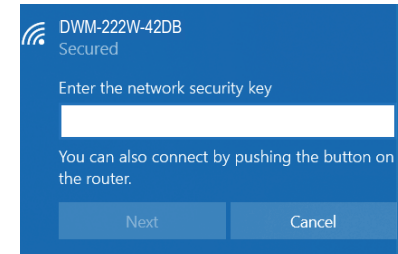

# Web-based Configuration


To access the configuration utility, open a web browser and enter the full URL of the adapter, which is **https://192.168.125.1** in the address bar.



**Note:** Make sure you enter the full URL, including the **https://** prefix, to access the web-based configuration.


When your browser displays a security warning stating, "Your connection isn't private." You will also see Not Secure in the address bar, along with HTTPS crossed out with red lines. This is because the device's default management URL is not an actual Internet website with valid certificates. You can proceed with the setup by following these steps:

1. Click the **Advanced** button.

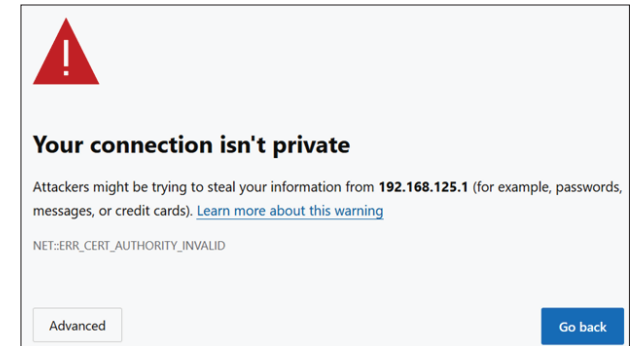

2. Click **Proceed** to *https://192.168.125.1*.

Now you will be able to sign in to your device.

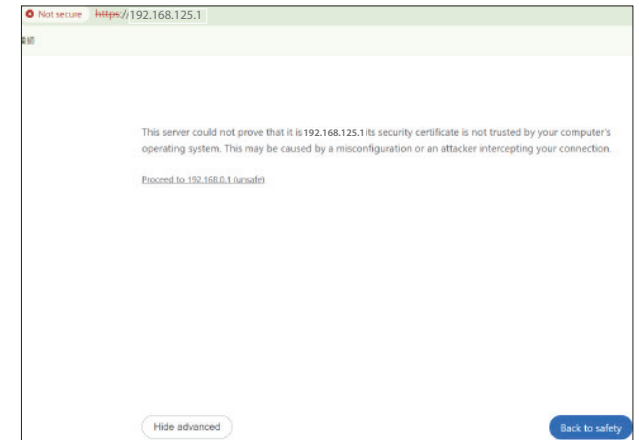

## Configuration Utility

Once you access the configuration utility through your web browser, you will need to sign in. Enter '*admin*' for both the username and password.

Click **Sign In** to continue.




**Note:** When you log in for the first time, a prompt will appear reminding you to change the admin password to enhance security. Please follow the instructions to set a password that meets the required security strength; failure to do so will impact the device's functionality, including mobile connectivity.

# Quick Setup

The Quick Setup is designed to guide you through a step-by-step process to configure your new DWM-222W with basic functionality.

## Step 1: Welcome Screen

Acknowledge the Welcome screen and click **Quick Setup**.

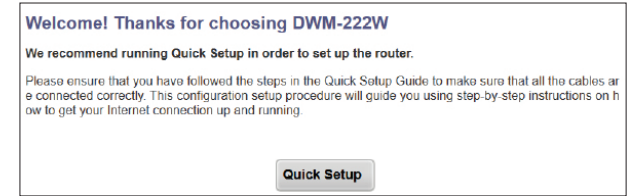


## Step 2: Configure the User Settings for Login

On the **User Settings** screen of the Quick Setup, enter a new username and password for the admin account. You are required to change the admin password for better security. Please follow the instructions to set a new password that meets the required security strength:

The password must be at least 10 characters long and include at least three of the following four character types:

- Uppercase letters (A-Z)
- Lowercase letters (a-z)
- Numbers (0–9)
- Special characters or symbols with the exception of # : & ; ~ | < space > \$ % ^ ! @ \ " ' . , - \_

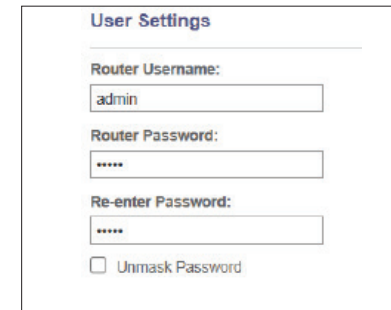

### Step 3: Configure the Wireless Network Settings for Client Connection

<b>Network Name (SSID)</b>	Enter a name for your wireless network.
<b>Network Visibility Status</b>	The default setting is Visible. Select Invisible if you do not want to broadcast the SSID of your wireless network.
<b>Wireless Security</b>	Select WPA2 Pre-shared key, WPA-WPA2 Mixed (mixed mode of WPA and WPA2 Pre-shared key), WPA3-SAE, or WPA2-WPA3 (mixed mode of WPA2 Pre-shared key and WPA3 Simultaneous Authentication of Equals—the default mode).
<b>Password</b>	<p>Enter the Wi-Fi password. Please adhere to the on-screen password strength requirements.</p> <p>The password must be at least 10 characters long and include at least three of the following four character types:</p> <ul style="list-style-type: none"> <li>• Uppercase letters (A-Z)</li> <li>• Lowercase letters (a-z)</li> <li>• Numbers (0–9)</li> <li>• Special characters or symbols (e.g. ( ) { })</li> </ul>
<b>Unmask Password</b>	Select this option to show the password.

**Wireless Network Settings**

Network Name (SSID):

Network Visibility Status:  
 Visible  Invisible

Wireless Security:

Password:

Re-enter Password:

Unmask Password

Then click **Finish** to close the setup process.

# Dashboard

The Dashboard page displays the current status of the adapter. It displays information such as cellular connection parameters and device network settings, Wi-Fi settings, and system uptime. The menu bar at the top of the page allows you to quickly navigate to the Dashboard, Internet, Home Network, SMS, Wireless, and Router functions.

Internet	
<b>Internet Connection</b>	
<b>Network Operator</b>	The mobile service provider.
Cellular Connection	
<b>Signal Strength</b>	The signal strength measured in dBm (0~-100). Higher values indicate stronger signals whereas lower values indicate weaker signals.
<b>Cellular Data Connectivity</b>	Enable or disable cellular connection.
<b>RSRQ</b>	Reference Signal Received Quality indicates the quality of the received reference signal.
<b>RSRP</b>	Reference Signal Received Power measures the power level in the LTE cell network.
<b>SINR</b>	Signal-to-interference-plus-noise ratio, which measures the quality of wireless signal by taking account of noise and other interfering factors.
<b>CellID</b>	Indicates the Cell tower or site (Cell ID).
<b>PCI</b>	Indicates the Physical Cell ID (PCI).
<b>Band</b>	The LTE frequency band used.
Software Information	
<b>Device Mode</b>	The operation mode of the device.
<b>Software Version</b>	The version of the device software.

The screenshot shows the D-Link dashboard interface. At the top, there is a navigation bar with tabs for Dashboard, Internet, Home Network, SMS, Wireless, and Router. Below the navigation bar is a status bar with icons for Internet, Router, and Wireless. The main content area is divided into three columns:

- Internet:**
  - Internet Connection:** Network Operator: TWM Mobile.
  - Cellular Connection:** Signal Strength: -80 dBm. Cellular Data Connectivity: Disabled.
  - RSRQ:** -11db
  - RSRP:** -83dBm
  - SINR:** 1db
  - cellid:** 01BE8BD5
  - PCI:** 407
  - Band:** 28
  - Software Information:** Device Mode: DWM-222W, Software Version: 1.00.02, Hardware Version: B1, IPv4 Address: 10.144.108.240, IPv4 DNS Server: 81.31.1.1, 81.31.233.1, IPv4 Default Gateway: 10.144.108.9, IPv4 Network Mask: 255.0.0.0, IPv6 Address: fe80:0000:0000:0000:0000:0000:2350:b882, Global IPv6 Address: 2402:7500:058a:4c98:0000:0000:2350:b882, IPv6 DNS Server: 2001:4548:0001:0000:0000:0000:0000:0001, 2001:4548:0002:0000:0000:0000:0000:0001.
- Router:**
  - Router Information:** IP: 192.168.125.1, IMEI: 898677078731259, ICCID: 8986972405704710188, IMSI: 49577008428934, Router Network Mask: 255.255.255.0, Router MAC: c4:a8:28:28:09:84, Run Time: 0 Day 0 Hour 25 Minutes 41 Seconds.
  - Auto APN List:** MCC: 495, MNC: 97, Operator Name: TWM, APN: internet, LTE APN: internet, Network Type: 0, 4G Auth Type: NONE, 4G User Name:, 4G Password:, Ip Type: IPv4.
- Home Network:**
  - Connected Devices:** 1
  - Wireless:** Enabled
  - Wireless Settings:** Wireless Network: DWM-222W\_2094, Password: 1234567890, Security Mode: WPA2-PSK, Channel Number: Automatic.
  - DHCP Server:** Enabled

<b>Hardware Version</b>	The version of the device hardware.
<b>IPV4/IPV6 Address</b>	The IPv4/IPv6 address of the cellular interface.
<b>IPV4/IPV6 Network Mask</b>	The IPv4/IPv6 network mask of the cellular interface.
<b>IPv4/IPv6 DNS Server</b>	The DNS address of the cellular network.
<b>IPv4/IPv6 Gateway</b>	The gateway's address of the cellular network.
<b>Current Connect Time</b>	The connection time for the current session.
<b>Total Connect Time</b>	The total time since the device has been up and running.
<b>Router</b>	
<b>Router Information</b>	
<b>IP</b>	The IP address of the device.
<b>IMEI</b>	The International Mobile Equipment Identity is a unique number assigned to every mobile device.
<b>ICCID</b>	The Integrate Circuit Card Identity is a unique number assigned to each SIM card.
<b>IMSI</b>	The SIM card has a unique number called an International Mobile Subscriber Identity (IMSI). This is used to identify and authenticate users on cellular devices.
<b>Router MAC</b>	The MAC address of the device.
<b>Run Time</b>	The duration that the device has been up and running.
<b>Auto APN List</b>	
<b>MCC</b>	The Mobile Country Code.
<b>MNC</b>	The Mobile Network Code.
<b>Operator Name</b>	The name of the mobile operator.
<b>APN</b>	Access Point Name (APN) is used to set up a network connection to enable Internet access through cellular communication.
<b>LTE APN</b>	The Access Point Name (APN) of the 4G LTE.

---

<b>Network Type</b>	The cellular network technology used.
<b>4G Auth Type</b>	The authentication method used for cellular network connection.
<b>4G User Name</b>	The network subscriber's account.
<b>4G Password</b>	The password of the account.
<b>IP Type</b>	The IP addressing mechanism.
<b>Home Network</b>	
<b>Connected Devices</b>	The number of mobile devices connected to the local network.
<b>Wireless</b>	Whether the Wi-Fi function is enabled or not.
<b>Wireless Settings</b>	
<b>Wireless Network</b>	The SSID of the Wi-Fi.
<b>Password</b>	The Wi-Fi connection password.
<b>Security Mode</b>	The configured Wi-Fi security method.
<b>Channel Number</b>	The configured channel number of the Wi-Fi.
<b>DHCP Server</b>	Whether the DHCP server is enabled or not.
<b>Note:</b> For each of the above configured settings, click on it to go to its configuration page.	

# Internet


The Internet page allows you to configure mobile connection parameters for Internet connection.

## Internet Connection

Configure your Internet connection according to the details of your mobile service plan.


To configure your Internet Connection:

1. Select **Cellular** to enable cellular function.
2. Select the mobile standard used for **Network Mode: 4G, 3G or 4G/3G**.
3. Select Preferred LTE Type: **LTE FDD preferred** or **TD-LTE preferred**.
4. Select the Connection Mode and whether automatic dial-up should be restricted when roaming is active.
5. Click **Save**.

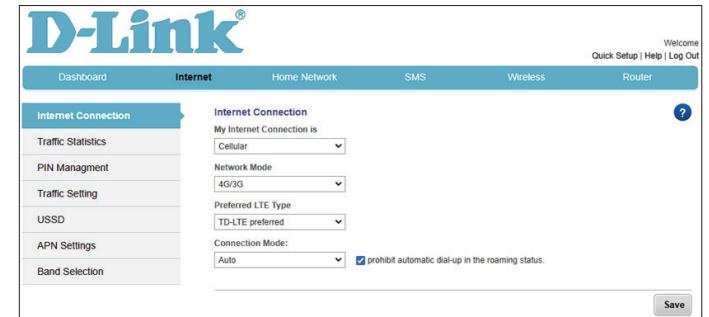

## Traffic Statistics

The Traffic Statistics page displays data packets sent and received through the device. The table lists the data packets sent through the following interfaces respectively: WAN, USB Connection and Wireless interface.

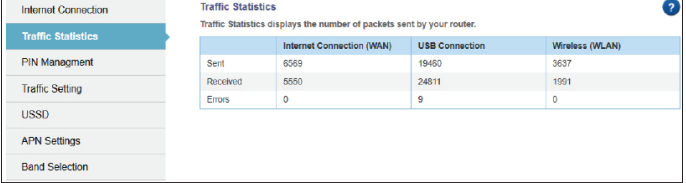


	Internet Connection (WAN)	USB Connection	Wireless (WLAN)
Sent	6569	1940	3637
Received	6650	24611	1961
Errors	0	9	0

## PIN Management

The PIN Management allows you to enable or disable PIN and change PIN for SIM card security.

The following can be configured:

**PIN/PUK Attempts:** This section shows the remaining number of attempts for entering the PIN (Personal Identification Number) and PUK (Personal Unblocking Key). By default, the system allows 3 PIN attempts and 10 PUK attempts before the SIM card becomes locked or permanently disabled.

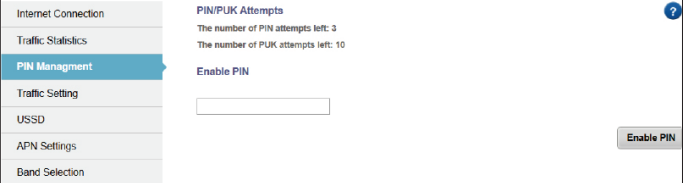

### Notes:

1. If you exceed 3 incorrect PIN attempts, you must enter the PUK code to unlock the SIM card.
2. If you exceed 10 incorrect PUK attempts, the SIM card will be permanently disabled.

### Enable/Disable PIN

- **Enable PIN:** Enter the correct PIN and click the Enable PIN button. Once enabled, the button will change to Disable PIN.
- **Disable PIN:** Enter the correct PIN and click the Disable PIN button. Once disabled, the button will change to Enable PIN.

## Change PIN

To change your PIN:

1. Enter the **current PIN**.
2. Enter a **new PIN**.
3. Click **Save**.

The PIN will be updated successfully.

## Traffic Setting

The Traffic Setting page allows you to control the amount of cellular data passing through the device.

To set a limit on the traffic:

1. Enable the traffic control and select a desired mode: **Unlimited Period** (without time period setting), **Per Month**, or **Per Period** (within the specified length of time).
2. Select the corresponding action when the traffic has reached the set maximum: **No Action** or **Disconnect**.
3. **Unlimited/Monthly/Per Period Used Traffic:** Click **Calibration** to specify the amount of traffic that has been used for the desired duration.
4. **Period/Monthly/Per Period Available Traffic:** Click **Change** to specify the amount of traffic that is available for the desired duration.
5. **Period/Monthly/Per Period Limit Traffic:** Click **Change** to specify the maximum amount of traffic allowed for the desired duration.

Internet Connection	<b>Traffic Control Settings</b>
Traffic Statistics	Traffic Control Mode Per Period ▾
PIN Management	Disconnect network when traffic arrived at the limit No Action ▾
<b>Traffic Setting</b>	Period Used Traffic 0.17 KB ▾ Calibration
USSD	Period Available Traffic NaN KB ▾ Change
APN Settings	Period Limit Traffic NaN KB ▾ Change
Band Selection	Period Time Range 2025 / 7 / 10 → 2025 / 12 / 10 Change

- If **Per Period** is chosen for the **Control Mode**, specify the range of time in YYYY/mm/dd format, for example, 2025/3/10.

## USSD

Unstructured Supplementary Service Data (USSD) allows ISP-specific applications to be activated with an SMS message. It allows you to obtain account information such as data usage or balance.

Enter a predefined code or symbols and click **Dial**.

## APN Settings

To configure APN manually:

- Enable the **APN Manual Setting**.
- Enter the **Access Point Name (APN)**, which sets up a network connection to enable Internet access through cellular communication.
- Select IPv4, IPv6 or both IPv4IPv6 for IP addressing mechanism.
- Check **Enable QoS** to enter **QoS Class Identifier (QCI) level**. A lower number indicates higher priority.
- Select the Authentication Type: **None**, **CHAP**, or **PAP**. For PAP and CHAP, enter the Username and Password.

## Band Selection

The Band Selection allows you to configure the cellular band and frequencies. First, select the **Network Mode**, then select the corresponding **Bands** for the desired mode. If both 4G/3G is selected, select the preferred mode in **Priority mode**.

# Home Network

The Home Network page allows you to configure the device's DHCP configuration, client connection logs, device information, and custom firewall rules.

## DHCP Settings

To enable the DHCP function for your local network:

1. To change the default LAN IP of the device, enter it as 192.168. x.x for your new IP address for accessing the web-based configuration .
2. Enable the DHCP server.
3. Specify the DHCP server IP assignment range with **DHCP Start Address** and **End Address**: 192.168.125.x to 192.168.125.x.
4. Enter the length of time for the IP address lease in seconds for **DHCP Lease Time**. The default is 86400.
5. Enable or disable **DNS configuration** for DHCP.
6. If DNS is enabled, enter the **DNS 1** and **DNS 2 IP Address** of the DHCP assignment.

To let the DHCP server always assign the same IP address to a specified LAN host, click **Add Static IP**, and then enter the MAC address of the LAN host and the assigned static IPv4 address.

For **DHCPv6** setting, choose either **Stateful** or **Stateless Server**. A Stateful DHCPv6 server provides IPv6 address as well as other related information such as DNS server address, whereas a Stateless DHCPv6 server provides other related information only.

The screenshot shows the D-Link Home Network configuration page for DHCP Settings. The interface includes a navigation menu with options like Dashboard, Internet, Home Network, SMS, Wireless, and Router. The DHCP Settings section is active, displaying various configuration fields:

- DHCP Range:** 192.168.125.1 to 192.168.125.1
- Router LAN IP:** 192.168.125.1
- DHCP Server:** Enabled (radio button selected)
- DHCP Start Address:** 192.168.125.1
- DHCP End Address:** 192.168.125.200
- DHCP Lease Time:** 86400 (in seconds)
- DNS Configure Switch:** Disabled
- DNS1 IP Address:** (empty field)
- DNS2 IP Address:** (empty field)

Below these settings is a table for adding static IP addresses:

MAC Address	IP Address
No entries found.	

At the bottom right, there is a **Save** button and an **Add Static IP** button.

## Connected Devices

The Connected Devices page displays the client information of the connected devices. It includes information such as device name, status, IP and MAC address, connection method, and duration.

Connected Devices						
Name	Status	IP Address	MAC Address	Connection	Connected time	
09051NBWIN10T	<span style="color: green;">●</span>	192.168.33.100	AC:00:33:AA:96:33	USB	0 Hour 26 Minutes 1 Second	

## Device Traffic

The Devices Traffic page shows the connection statistics for all connected devices. The table displays the client's name, MAC Address, Total Connection Time, and Status. Click a client's name to view detailed connection information, including the last access time, total connection duration, monthly data usage (sent and received), and overall data usage during the entire connection period. To prevent a device from accessing the home network, click **Block** under the Action column.

Device Traffic				
Name	MAC Address	Total Connected Time	Device Status	Action
09051NBWIN10T	AC:00:33:AA:96:33	0 Day 0 Hour 27 Minutes 41 Seconds	Connected	

## Network Activity

The Network Activity screen displays a list of dialer logs and Wi-Fi clients' connection log. The **Access Logs** contain device IP address and the time when the connection starts and ends. The **Wi-Fi client Access logs** contain MAC addresses and the time when the Wi-Fi connection starts and ends. You can select records and click **Delete** to delete them from the table.

Access Logs							
PDP Name	CID	Start Time	End Time	IP Type	IPv4 Addr	IPv6 Addr	
PDN1	1	7/16/2025 18:19:49	7/16/2025 17:21:15	IPv4	10.92.45.49	N/A	<input type="checkbox"/>
PDN1	1	7/16/2025 18:19:35	7/16/2025 17:21:15	IPv4	10.94.129.97	N/A	<input type="checkbox"/>
PDN1	1	7/16/2025 18:19:23	7/16/2025 17:21:15	IPv4	10.94.129.141	N/A	<input type="checkbox"/>
PDN1	1	7/16/2025 18:19:14	7/16/2025 17:21:15	IPv4	10.92.164.154	N/A	<input type="checkbox"/>
PDN1	1	7/16/2025 18:19:5	7/16/2025 17:21:15	IPv4	10.93.13.93	N/A	<input type="checkbox"/>
PDN1	1	7/16/2025 17:21:17	7/16/2025 17:21:15	IPv4	10.93.193.70	N/A	<input type="checkbox"/>

WiFi Client Access Logs		
Client MAC Address	Connect Time	Disconnect Time
3C:F0:11:3E:6C:9B	1/1/2014 0:2:39	1/1/2014 0:7:8

## Custom Firewall Rules

The Custom Firewall Rules page allows you to block specific types of network traffic using source IP addresses, source ports, destination IP addresses, destination ports, or any combination of these parameters.

To define a rule:

1. Click **Add Rule** to display the configuration screen.

Custom Firewall Rules						
Rule Name	Enabled	Source IP Address	Source Port	Destination IP Address	Destination Port	Protocol
No entries found.						

2. Enter a name for the rule.
3. Enable or disable the defined rule.
4. Enter the **Source IP Address** in **CIDR notation** and **Port Range** for the rule. You can enter a single port or a range of ports.
5. Enter the **Destination IP Address** in **CIDR notation** and **Port Range** for the rule. You can enter a single port or a range of ports.

Select the appropriate protocol to apply for the rule: **TCP, UDP** or **Both**.

The screenshot shows a window titled "Custom Firewall Rule" with the following fields:

- Rule Name:** An empty text input field.
- Status:** Radio buttons for "Enabled" (selected) and "Disabled".
- Source IP Address:** A field with four boxes for IP octets and a slash for CIDR notation.
- Source Port:** Two empty text input fields.
- Destination IP Address:** A field with four boxes for IP octets and a slash for CIDR notation.
- Destination Port:** Two empty text input fields.
- Protocol:** A dropdown menu currently showing "TCP".

At the bottom right, there are "OK" and "Cancel" buttons.

## Port Forwarding

The Port Forwarding enables certain applications to connect through the device.

To define a rule:

1. Enable **Port Forwarding**.
2. Click **Add Rule** to display the configuration screen.
3. Enter a name for the rule.
4. Enter the IP address of the computer on your local network to which you want to direct the incoming service.
5. Enter the start and end **Port** that the rule will apply to. You can enter a single port or a range of ports.
6. Select the appropriate protocol to apply for the rule: **TCP, UDP** or **Both**.

The screenshot shows the "Port Forwarding" section of a configuration interface. On the left is a sidebar with menu items: "DHCP Settings", "Connected Devices", "Device Traffic", "Network Activity", "Custom Firewall Rules", and "Port Forwarding" (which is highlighted). The main area shows "Port Forwarding" with "Custom Port Forwarding Rules" and "Enabled" selected. There is an "Add Rule" button and a table with columns "Rule Name", "IP Address", "Port Range", and "Protocol". The table currently contains the text "No entries found." and a "Save" button is at the bottom right.

The screenshot shows a window titled "Port Forwarding Rule" with the following fields:

- Rule Name:** An empty text input field.
- IP Address:** A field with four boxes for IP octets, with the first three containing "192", "168", and "33".
- Port:** Two empty text input fields.
- Protocol:** A dropdown menu currently showing "TCP".

At the bottom right, there are "OK" and "Cancel" buttons.


# SMS

The SMS page allows you to manage SMS messages received on the SIM card and device.

## SMS Settings


The following can be configured:

<b>SMS Save Location</b>	Select either SIM card or the device to save SMS messages.
<b>SMS Over Mode</b>	Select the method for sending SMS messages: <b>SMS over PS (Packet Switched)</b> , <b>SMS over CS (Circuit Switched)</b> , <b>SMS over PS Prefer</b> , or <b>SMS over CS Prefer</b> .
<b>Validity</b>	Select valid period for SMS: <b>12 Hours</b> , <b>1 Day</b> , <b>1 Week</b> , or <b>Maximum period</b> allowed.
<b>Center Number</b>	Set or change the SMS service center number used for message forwarding on your SIM card.

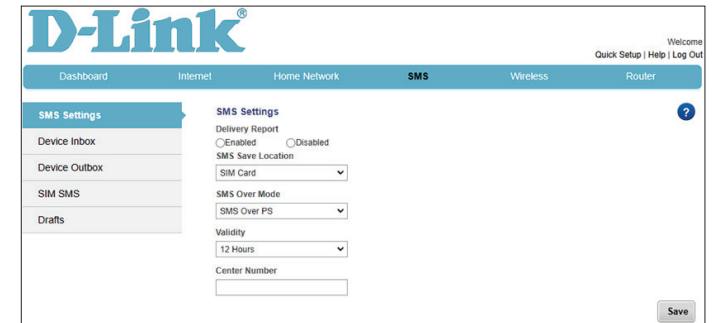


## Device Inbox

The Device Inbox screen displays a list of received messages on the device. You can create a new message, delete a message on the list, and copy or move a message to save to the SIM card.

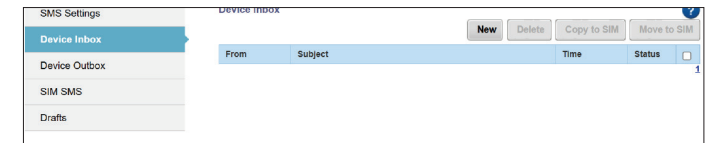


## Device Outbox

The Device Outbox screen displays a list of sent messages on the device. You can create a new message or delete a message on the list.

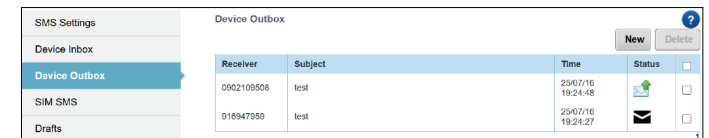


## SIM SMS

The SIM SMS screen displays the list of received messages on the SIM card. You can create a new message, delete a message on the list, and copy or move a message to save to the device.

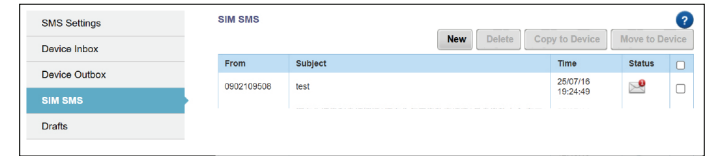

## Drafts

The Drafts screen displays a list of saved messages. You can create a new draft message to be sent later or delete a draft message on the list.

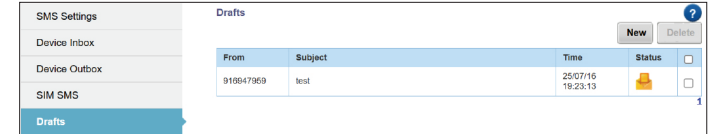


# Wireless

The Wireless page allows you to configure Wi-Fi connection parameters and manage the accessibility of the wireless network.

## Wireless Settings

Configure the following to set up a wireless local network:

1. Enable the wireless function.
2. Select the wireless standard: **802.11ax** or **802.11 n/g/b**.
3. Select the Channel Bandwidth: 20 or 40MHz.
4. Select the **Primary Channel** for your wireless network.
5. Enable or disable **Band40 ACS Switch**. Enabling this to avoid conflict with LTE band 40 by only using channel 6, 7, 8, 9, and 10 on Wi-Fi.
6. Set the maximum number of allowed clients: 1 to 8.

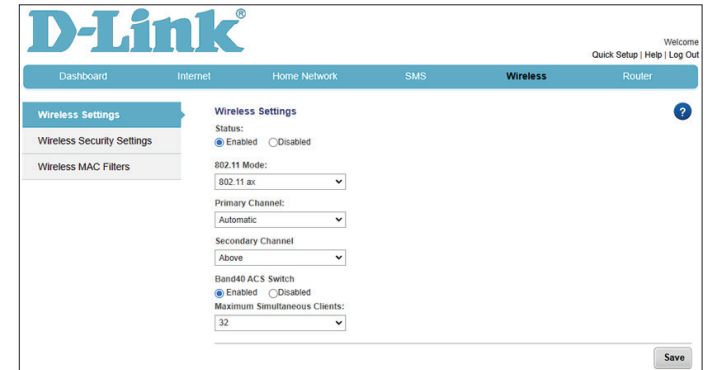

## Wireless Security Settings


Configure the following to set up the security method to protect your wireless network:

1. Enter a name (SSID) for the wireless network.
2. Check **Visible** if you want to allow wireless clients to detect this wireless network when scanning for available networks. Check **Invisible** if you do not want to make the SSID to be seen in the scan list. Select **WPA2 Pre-shared key**, **WPA-WPA2 Mixed** (mixed mode of WPA and WPA2 Pre-shared key), **WPA3-SAE**, or **WPA2-WPA3** (mixed mode of WPA2 Pre-shared key and WPA3 Simultaneous Authentication of Equals (the default)).
3. Enter a password for your wireless network. Please adhere to the on-screen password strength requirements.



The password must be at least 10 characters long and include at least three of the following four character types:

- Uppercase letters (A-Z)
  - Lowercase letters (a-z)
  - Numbers (0–9)
  - Special characters or symbols (e.g. ( ) { })
4. The WPS (Wi-Fi Protected Setup) is an easy method to connect wireless clients to the device. Click **Add WPS Client** to display the WPS configuration page.
- To use the Push Button method, click **Push** to start the WPS process. To pair with a client, please refer to the user manual of the wireless client. On Windows, after selecting the desired Wi-Fi network, click **Push** when prompted with the message: “You can also connect by pushing the button on the router.” Refer to **Connect via Wi-Fi** on page **8**.
  - To use the PIN method, enter **PIN** and then click **Register**. For PIN code, please refer to the user manual of the wireless client.

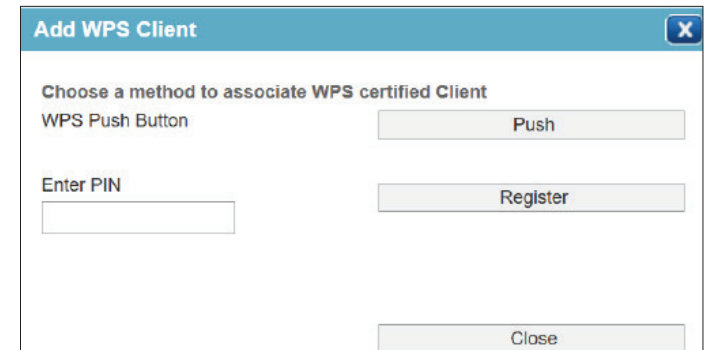


### Wireless MAC Filters

The wireless MAC filters screen allows or blocks specified clients from accessing the Internet through the device.

To configure a MAC filter:

1. Enable **MAC Filters**.
2. Select either **Deny** to block access or select **Allow** to allow access. An Allow list will allow only specified devices in the filter to access the Internet while all other devices will be blocked Internet access.
3. Click **Add** to add MAC addresses to the filter list.
4. Click **Save**.

You can select an entry and then click **Delete** to remove it from the list.

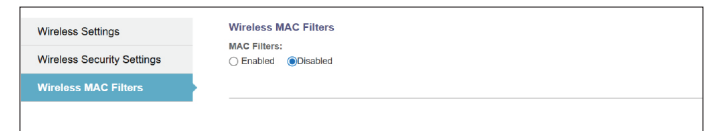


# Router

The Router page allows you to restart and reset the device, set the management password, and upgrade the system.


## User Management

You can manage the Admin account to access the Web-based Configuration. Enter a new password and confirm it by entering it again. Then click **OK**.

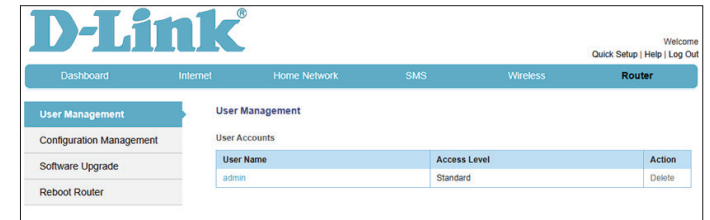

## Configuration Management

This screen allows you to restore the device to its factory default settings. Click **Restore Factory Settings**. Note that all your current configuration will be erased.




## Software Upgrade

### Automatic Upgrade

Click **Upgrade** to start upgrading the device automatically.

### Manual Upgrade

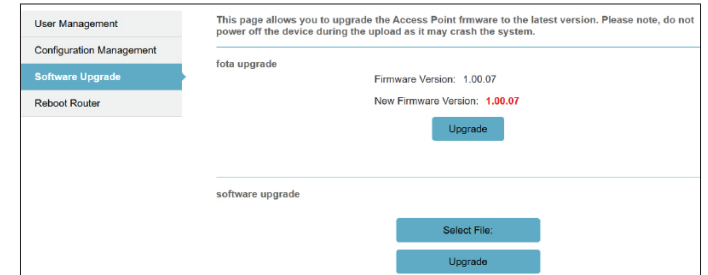


Click **Select File** to locate the software file, then click **Upgrade** to start upgrading the device's software.



# Connect a Wireless Client to Your Network

## WPS Utility

The easiest way to connect your wireless devices to DWM-222W is with WPS (Wi-Fi Protected Setup). Most wireless devices such as wireless adapters, media players, Blu-ray DVD players, wireless printers and cameras have a WPS button (or a software utility with WPS) that you can press to connect to the DWM-222W. Please refer to your user manual for the wireless device you want to connect to make sure you understand how to enable WPS. On Windows, follow the steps below:

- Step 1** - Find the Network icon on the taskbar (, , or ). Select the DWM-222W's wireless network and click **Connect**. You will be prompted to enter the security key. Alternatively, you can connect by pressing the WPS button on the router.
- Step 2** - Within 2 minutes, press the WPS button through the Web Configuration to start the WPS process. Click **Push** to use the Push Button method. (Refer to **Wireless Security Settings** on page **26**).
- Step 3** - Allow up to 1 minute for your connection to be configured. From the **Connected Devices** page (**Home Network > Connected Devices**), you can now check if the new wireless client has been successfully connected to the network.

# Troubleshooting

This chapter provides solutions to problems that can occur during the installation and operation of the DWM-222W. Read the following descriptions if you are having problems.

## 1. Why can't I access the Web-based Configuration?

When entering the IP address of your adapter (192.168.125.1 for example), you are not connecting to a website on the Internet nor do you have to be connected to the Internet. The device has the utility built-in to a ROM chip in the device itself. Your computer must be on the same IP subnet to connect to the web-based utility.

- Make sure you have an updated Java-enabled web browser. We recommend the following:
  - Microsoft® Edge, Google™ Chrome 28.0, Mozilla® Firefox 23.0, or Apple® Safari 6.
- If attempting to connect wirelessly, ensure that you are connected to the correct SSID for your mobile hotspot.
- Make sure that the computer you are using is not connected to any other devices (such as routers or switches) which might have the same IP address as the DWM-222W, as this may cause an IP address conflict. If you have a conflict, temporarily unplug any other devices from your computer while you configure the DWM-222W.
- Disable any Internet security software running on the computer. Software firewalls such as ZoneAlarm, BlackICE, Sygate, Norton Personal Firewall, and Windows® Firewall may block access to the configuration pages. Check the help files included with your firewall software for more information on disabling or configuring it.

## 2. What can I do if I forgot my password?

If you forgot your password, you must reset your adapter. Please note that this process will change all your settings back to the factory defaults. To reset the device, press and hold the reset button for 8 seconds (refer to **Hardware Overview** on page 4). The DWM-222W will restore the factory default settings. The default IP address is 192.168. 125.1, and the default admin password is *admin*.

# Networking Basics

## Check your IP address

After you connect with your new adapter, by default, the TCP/IP settings should be set to obtain an IP address from a DHCP server . To verify your IP address, please follow the steps below.

Click the **Start** button , type **cmd**, then press **Enter**.

At the prompt, type *ipconfig* and press **Enter**.

This will display the IP address, subnet mask, and the default gateway of your adapter.

If the address is 0.0.0.0 or 169.254.x.x, check your device installation, computer's security settings, and the DHCP settings (go to **Network Network > DHCP Settings**) on your adapter. Some firewall software programs may block a DHCP request on your computer.

```
Microsoft Windows [Version 10.0.19041.21]
(c) 2019 Microsoft Corporation. All rights reserved.

C:\Documents and Settings>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : dlink
    IP Address. . . . .               : 10.5.7.114
    Subnet Mask . . . . .            : 255.255.255.0
    Default Gateway . . . . .        : 10.5.7.1

C:\Documents and Settings>_
```

# Technical Specifications

## Radio Frequency Bands<sup>1</sup>

- LTE: B1/B3/B5/B7/B8/B20/B28/B38/B40/B41
- WCDMA: B1/B5/B8

## Cellular Access<sup>2</sup>

LTE Cat4:

- Downlink: 150 Mbps
- Uplink: 50 Mbps

## Wi-Fi Access Point

- IEEE 802.11ax/n/g/b (2.4 GHz)

## Antenna

- 2 x Internal Cellular Antennas
- 1 x Internal Wi-Fi Antenna

## Interfaces

- 1 x Nano SIM card slot (4FF)
- 1 x USB 2.0 Type-A

## LED Indicators

- Network Status

## Wireless Encryption

- WPA™
- WPA2™
- WPA3™
- WPS (Wi-Fi Protected Setup) via Web Configuration

## Dimensions (L x W x H)

- 105.1 x 32.5 x 13 mm (4.14 x 1.28 x 0.51 in)

<sup>1</sup> Supported frequency band is dependent upon regional hardware version.

<sup>2</sup> Data rates are theoretical. Data transfer rate depends on network capacity, signal strength, and other factors.

## Weight

- 30 g (1.06 oz)

## Operating Temperature/Humidity

- 0 to 45 °C (32 to 113 °F) / 5% to 95% non-condensing

## Storage Temperature/Humidity

- -20 to 70 °C (-4 to 158 °F) / 5% to 95% non-condensing

# Regulatory Information

## CE EMI Class A Warning

This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.



	Frequency Band(s) Frequenzband Fréquence bande(s) Bandas de Frecuencia Frequenza/e Frequentie(s)	Max. Output Power (EIRP) Max. Output Power Consommation d'énergie max. Potencia máxima de Salida Potenza max. Output Max. Output Power
2.4 G	2.4 – 2.4835 GHz	100 mW

### **FCC Statement:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

### **FCC RF Exposure Information (SAR)**

This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The exposure standard employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. Tests for SAR reconducted using standard operating positions accepted by the FCC with the EUT transmitting at the specified power level in different channels. The FCC has granted an Equipment Authorization for this device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this device is on file with the FCC and can be found under the Display Grant section of [www.fcc.gov/oet/ea/fccid](http://www.fcc.gov/oet/ea/fccid).

To ensure that RF exposure levels remain at or below the tested levels, use a beltclip, holster, or similar accessory that have no metallic component in the assembly and must maintains a minimum separation distance of 5mm between your body and the device.

## European Community Declaration of Conformity:

Česky [Czech]	Tímto D-Link Corporation prohlašuje, že tento produkt, jeho příslušenství a software jsou v souladu se směrnicí 2014/53/EU. Celý text ES prohlášení o shodě vydaného EU a o firmwaru produktu lze stáhnout na stránkách k produktu <a href="http://www.dlink.com">www.dlink.com</a> .
Dansk [Danish]	D-Link Corporation erklærer herved, at dette produkt, tilbehør og software er i overensstemmelse med direktiv 2014/53/EU. Den fulde tekst i EU-overensstemmelseserklæringen og produktfirmware kan wnloades fra produktsiden hos <a href="http://www.dlink.com">www.dlink.com</a> .
Deutsch [German]	Hiermit erklärt die D-Link Corporation, dass dieses Produkt, das Zubehör und die Software der Richtlinie 2014/53/EU entsprechen. Der vollständige Text der Konformitätserklärung der Europäischen Gemeinschaft sowie die Firmware zum Produkt stehen Ihnen zum Herunterladen von der Produktseite im Internet auf <a href="http://www.dlink.com">www.dlink.com</a> zur Verfügung.
Eesti [Estonian]	Käesolevaga kinnitab D-Link Corporation, et see toode, tarvikud ja tarkvara on kooskõlas direktiiviga 2014/53/EL. Euroopa Liidu vastavusdeklaratsiooni täistekst ja toote püsivara on allalaadimiseks saadaval tootelehel <a href="http://www.dlink.com">www.dlink.com</a> .
English	Hereby, D-Link Corporation, declares that this product, accessories, and software are in compliance with directive 2014/53/EU. The full text of the EU Declaration of Conformity and product firmware are available for download from the product page at <a href="http://www.dlink.com">www.dlink.com</a>
Español [Spanish]	Por la presente, D-Link Corporation declara que este producto, accesorios y software cumplen con las directivas 2014/53/UE. El texto completo de la declaración de conformidad de la UE y el firmware del producto están disponibles y se pueden descargar desde la página del producto en <a href="http://www.dlink.com">www.dlink.com</a> .
Ελληνική [Greek]	Με την παρούσα, η D-Link Corporation δηλώνει ότι αυτό το προϊόν, τα αξεσουάρ και το λογισμικό συμμορφώνονται με την Οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης της ΕΕ και το υλικολογισμικό του προϊόντος είναι διαθέσιμα για λήψη από τη σελίδα του προϊόντος στην τοποθεσία <a href="http://www.dlink.com">www.dlink.com</a> .
Français [French]	Par les présentes, D-Link Corporation déclare que ce produit, ces accessoires et ce logiciel sont conformes aux directives 2014/53/UE. Le texte complet de la déclaration de conformité de l'UE et le microprogramme du produit sont disponibles au téléchargement sur la page des produits à <a href="http://www.dlink.com">www.dlink.com</a> .
Italiano [Italian]	Con la presente, D-Link Corporation dichiara che questo prodotto, i relativi accessori e il software sono conformi alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE e il firmware del prodotto sono disponibili per il download dalla pagina del prodotto su <a href="http://www.dlink.com">www.dlink.com</a> .

Latviski [Latvian]	Ar šo uzņēmums D-Link Corporation apliecina, ka šis produkts, piederumi un programmatūra atbilst direktīvai 2014/53/ES. ES atbilstības deklarācijas pilno tekstu un produkta aparātprogrammatūru var lejupielādēt attiecīgā produkta lapā vietnē <a href="http://www.dlink.com">www.dlink.com</a> .
Lietuvių [Lithuanian]	Šiuo dokumentu „D-Link Corporation“ pareiškia, kad šis gaminys, priedai ir programinė įranga atitinka direktyvą 2014/53/ES. Visą ES atitikties deklaracijos tekstą ir gaminio programinę aparatinę įrangą galima atsisiųsti iš gaminio puslapio adresu <a href="http://www.dlink.com">www.dlink.com</a> .
Nederlands [Dutch]	Hierbij verklaart D-Link Corporation dat dit product, accessoires en software voldoen aan de richtlijnen 2014/53/EU. De volledige tekst van de EU conformiteitsverklaring en productfirmware is beschikbaar voor download van de productpagina op <a href="http://www.dlink.com">www.dlink.com</a> .
Malti [Maltese]	Bil-preżenti, D-Link Corporation tiddikjara li dan il-prodott, l-aċċessorji, u s-software huma konformi mad-Direttiva 2014/53/UE. Tista' tnizzel it-test sħiħ tad-dikjarazzjoni ta' konformità tal-UE u l-firmware tal-prodott mill-paġna tal-prodott fuq <a href="http://www.dlink.com">www.dlink.com</a> .
Magyar [Hungarian]	Ezennel a D-Link Corporation kijelenti, hogy a jelen termék, annak tartozékai és szoftvere megfelelnek a 2014/53/EU sz. rendeletnek. Az EU Megfelelőségi nyilatkozat teljes szövege és a termék firmware a termék oldaláról tölthető le a <a href="http://www.dlink.com">www.dlink.com</a> címen.
Polski [Polish]	D-Link Corporation niniejszym oświadcza, że ten produkt, akcesoria oraz oprogramowanie są zgodne z dyrektywami 2014/53/EU. Pełen tekst deklaracji zgodności UE oraz oprogramowanie sprzętowe do produktu można pobrać na stronie produktu w witrynie <a href="http://www.dlink.com">www.dlink.com</a> .
Português [Portuguese]	Desta forma, a D-Link Corporation declara que este produto, os acessórios e o software estão em conformidade com a diretiva 2014/53/UE. O texto completo da declaração de conformidade da UE e do firmware
Slovensko[Slovenian]	Podjetje D-Link Corporation s tem izjavlja, da so ta izdelek, dodatna oprema in programnska oprema skladni z direktivami 2014/53/EU. Celotno besedilo izjave o skladnosti EU in vdelana programska oprema sta na voljo za prenos na strani izdelka na <a href="http://www.dlink.com">www.dlink.com</a> .
Slovensky [Slovak]	Spoločnosť D-Link týmto vyhlasuje, že tento produkt, príslušenstvo a softvér sú v súlade so smernicou 214/53/EÚ. Úplné znenie vyhlásenia EÚ o zhode a firmvéri produktu sú k dispozícii na prevzatie zo stránky produktu <a href="http://www.dlink.com">www.dlink.com</a> .
Suomi [Finnish]	D-Link Corporation täten vakuuttaa, että tämä tuote, lisävarusteet ja ohjelmisto ovat direktiivin 2014/53/EU vaatimusten mukaisia. Täydellinen EU-vaatimustenmukaisuusvakuutus samoin kuin tuotteen laiteohjelmisto ovat ladattavissa osoitteesta <a href="http://www.dlink.com">www.dlink.com</a> .

Svenska[Swedish]	D-Link Corporation försäkrar härmed att denna produkt, tillbehör och programvara överensstämmer med direktiv 2014/53/EU. Hela texten med EU-försäkran om överensstämmelse och produkt-firmware kan hämtas från produktsidan på <a href="http://www.dlink.com">www.dlink.com</a> .
Íslenska [Icelandic]	Hér með lýsir D-Link Corporation því yfir að þessi vara, fylgihlutir og hugbúnaður eru í samræmi við tilskipun 2014/53/EB. Sækja má ESB-samræmisýfirlýsinguna í heild sinni og fastbúnað vörunnar af vefsíðu vörunnar á <a href="http://www.dlink.com">www.dlink.com</a> .
Norsk [Norwegian]	Herved erklærer D-Link Corporation at dette produktet, tilbehøret og programvaren er i samsvar med direktivet 2014/53/EU. Den fullstendige teksten i EU-erklæring om samsvar og produktets fastvare er tilgjengelig for nedlasting fra produktsiden på <a href="http://www.dlink.com">www.dlink.com</a> .

**Warning Statement:**

The power outlet should be near the device and easily accessible.

### **NOTICE OF WIRELESS RADIO LAN USAGE IN THE EUROPEAN COMMUNITY (FOR WIRELESS PRODUCT ONLY):**

- This device is a 2.4 GHz wideband transmission system (transceiver), intended for use in all EU member states and EFTA countries. This equipment may be operated in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, and CY.

#### **Usage Notes:**

- To remain in conformance with European National spectrum usage regulations, frequency and channel limitations will be applied on the products according to the country where the equipment will be deployed.
- Please refer to the product manual or datasheet to check whether your product uses 2.4 GHz and/or 5 GHz wireless.

### **HINWEIS ZUR VERWENDUNG VON DRAHTLOS-NETZWERK (WLAN) IN DER EUROPÄISCHEN GEMEINSCHAFT ( NUR FÜR EIN DRAHTLOSES PRODUKT )**

- Bei diesem Gerät handelt es sich um ein zum Einsatz in allen EU-Mitgliedsstaaten und in EFTA-Ländern - ausgenommen Frankreich. Der Betrieb dieses Geräts ist in den folgenden Ländern erlaubt: AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

#### **Gebrauchshinweise:**

- Um den in Europa geltenden nationalen Vorschriften zum Nutzen des Funkspektrums weiterhin zu entsprechen, werden Frequenz und Kanalbeschränkungen, dem jeweiligen Land, in dem das Gerät zum Einsatz kommt, entsprechend, auf die Produkte angewandt.
- Bitte schlagen Sie im Handbuch oder Datenblatt nach nach, ob Ihr Gerät eine 2,4 GHz und / oder 5 GHz Verbindung nutzt.

### **AVIS CONCERNANT L'UTILISATION DE LA RADIO SANS FIL LAN DANS LA COMMUNAUTÉ EUROPÉENNE (UNIQUEMENT POUR LES PRODUITS SANS FIL)**

- Cet appareil est un système de transmission à large bande (émetteur-récepteur) de 2,4 GHz, destiné à être utilisé dans tous les États-membres de l'UE et les pays de l'AELE. Cet équipement peut être utilisé dans les pays suivants : AL, AD, BE , BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT , MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

#### **Notes d'utilisation:**

- Pour rester en conformité avec la réglementation nationale européenne en matière d'utilisation du spectre, des limites de fréquence et de canal seront appliquées aux produits selon le pays où l'équipement sera déployé.
- Merci de vous référer au guide d'utilisation ou de la fiche technique afin de vérifier si votre produit utilise 2.4 GHz et/ou 5 GHz sans fil.

### **AVISO DE USO DE LA LAN DE RADIO INALÁMBRICA EN LA COMUNIDAD EUROPEA (SOLO PARA EL PRODUCTO INALÁMBRICO)**

- Este dispositivo es un sistema de transmisión (transceptor) de banda ancha de 2,4 GHz, pensado para su uso en todos los estados miembros de la UE y en los países de la AELC. Este equipo se puede utilizar en AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

#### **Notas de uso:**

- Para seguir cumpliendo las normas europeas de uso del espectro nacional, se aplicarán limitaciones de frecuencia y canal en los productos en función del país en el que se pondrá en funcionamiento el equipo.
- Por favor compruebe el manual o la ficha de producto para comprobar si el producto utiliza las bandas inalámbricas de 2.4 GHz y/o la de 5 GHz.

### **AVVISO PER L'USO DI LAN RADIO WIRELESS NELLA COMUNITÀ EUROPEA (SOLO PER PRODOTTI WIRELESS)**

- Questo dispositivo può essere utilizzato in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

#### **Note per l'uso**

- Al fine di mantenere la conformità alle normative nazionali europee per l'uso dello spettro di frequenze, saranno applicate limitazioni sulle frequenze e sui canali per il prodotto in conformità alle normative del paese in cui il dispositivo viene utilizzato.
- Ti invitiamo a fare riferimento al manuale del prodotto o alla scheda tecnica per verificare se il tuo prodotto utilizza le frequenze 2,4 GHz e/o 5 GHz.

### **KENNISGEVING VAN DRAADLOOS RADIO LAN-GEBRUIK IN DE EUROPESE GEMEENSCHAP (ALLEEN VOOR DRAADLOOS PRODUCT)**

- Dit toestel is een 2.4 GHz breedband transmissiesysteem (transceiver) dat bedoeld is voor gebruik in alle EU lidstaten en EFTA landen. Deze uitrusting mag gebruikt worden in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

#### **Gebruiksaanwijzingen:**

- Om de gebruiksvoorschriften van het Europese Nationale spectrum na te leven, zullen frequentie- en kanaalbeperkingen worden toegepast op de producten volgens het land waar de uitrusting gebruikt zal worden.
- Raadpleeg de handleiding of de datasheet om te controleren of uw product gebruik maakt van 2.4 GHz en/of 5 GHz.

## **SAFETY INSTRUCTIONS**

The following general safety guidelines are provided to help ensure your own personal safety and protect your product from potential damage. Remember to consult the product user instructions for more details.

- Static electricity can be harmful to electronic components. Discharge static electricity from your body (i.e. touching grounded bare metal) before touching the product.
- Do not attempt to service the product and never disassemble the product. For some products with a user replaceable battery, please read and follow the instructions in the user manual.
- Do not spill food or liquid on your product and never push any objects into the openings of your product.
- Do not use this product near water, areas with high humidity, or condensation unless the product is specifically rated for outdoor application.
- Keep the product away from radiators and other heat sources.
- Always unplug the product from mains power before cleaning and use a dry lint free cloth only.

## **SICHERHEITSVORSCHRIFTEN**

Die folgenden allgemeinen Sicherheitsvorschriften dienen als Hilfe zur Gewährleistung Ihrer eigenen Sicherheit und zum Schutz Ihres Produkts. Weitere Details finden Sie in den Benutzeranleitungen zum Produkt.

- Statische Elektrizität kann elektronischen Komponenten schaden. Um Schäden durch statische Aufladung zu vermeiden, leiten Sie elektrostatische Ladungen von Ihrem Körper ab, (z. B. durch Berühren eines geerdeten blanken Metallteils), bevor Sie das Produkt berühren.
- Unterlassen Sie jeden Versuch, das Produkt zu warten, und versuchen Sie nicht, es in seine Bestandteile zu zerlegen. Für einige Produkte mit austauschbaren Akkus lesen Sie bitte das Benutzerhandbuch und befolgen Sie die dort beschriebenen Anleitungen.
- Vermeiden Sie, dass Speisen oder Flüssigkeiten auf Ihr Produkt gelangen, und stecken Sie keine Gegenstände in die Gehäuseschlitze oder -öffnungen Ihres Produkts.
- Verwenden Sie dieses Produkt nicht in unmittelbarer Nähe von Wasser und nicht in Bereichen mit hoher Luftfeuchtigkeit oder Kondensation, es sei denn, es ist speziell zur Nutzung in Außenbereichen vorgesehen und eingestuft.
- Halten Sie das Produkt von Heizkörpern und anderen Quellen fern, die Wärme erzeugen.
- Trennen Sie das Produkt immer von der Stromzufuhr, bevor Sie es reinigen und verwenden Sie dazu ausschließlich ein trockenes fusselfreies Tuch.

## CONSIGNES DE SÉCURITÉ

Les consignes générales de sécurité ci-après sont fournies afin d'assurer votre sécurité personnelle et de protéger le produit d'éventuels dommages. Veuillez consulter les consignes d'utilisation du produit pour plus de détails.

- L'électricité statique peut endommager les composants électroniques. Déchargez l'électricité statique de votre corps (en touchant un objet en métal relié à la terre par exemple) avant de toucher le produit.
- N'essayez pas d'intervenir sur le produit et ne le démontez jamais. Pour certains produits contenant une batterie remplaçable par l'utilisateur, veuillez lire et suivre les consignes contenues dans le manuel d'utilisation.
- Ne renversez pas d'aliments ou de liquide sur le produit et n'insérez jamais d'objets dans les orifices.
- N'utilisez pas ce produit à proximité d'un point d'eau, de zones très humides ou de condensation sauf si le produit a été spécifiquement conçu pour une application extérieure.
- Éloignez le produit des radiateurs et autres sources de chaleur.
- Débranchez toujours le produit de l'alimentation avant de le nettoyer et utilisez uniquement un chiffon sec non pelucheux.

## INSTRUCCIONES DE SEGURIDAD

Las siguientes directrices de seguridad general se facilitan para ayudarle a garantizar su propia seguridad personal y para proteger el producto frente a posibles daños. No olvide consultar las instrucciones del usuario del producto para obtener más información.

- La electricidad estática puede resultar nociva para los componentes electrónicos. Descargue la electricidad estática de su cuerpo (p. ej., tocando algún metal sin revestimiento conectado a tierra) antes de tocar el producto.
- No intente realizar el mantenimiento del producto ni lo desmonte nunca. Para algunos productos con batería reemplazable por el usuario, lea y siga las instrucciones del manual de usuario.
- No derrame comida o líquidos sobre el producto y nunca deje que caigan objetos en las aberturas del mismo.
- No utilice este producto cerca del agua, en zonas con humedad o condensación elevadas a menos que el producto esté clasificado específicamente para aplicación en exteriores.
- Mantenga el producto alejado de los radiadores y de otras fuentes de calor.
- Desenchufe siempre el producto de la alimentación de red antes de limpiarlo y utilice solo un paño seco sin pelusa.

## **ISTRUZIONI PER LA SICUREZZA**

Le seguenti linee guida sulla sicurezza sono fornite per contribuire a garantire la sicurezza personale degli utenti e a proteggere il prodotto da potenziali danni. Per maggiori dettagli, consultare le istruzioni per l'utente del prodotto.

- L'elettricità statica può essere pericolosa per i componenti elettronici. Scaricare l'elettricità statica dal corpo (ad esempio toccando una parte metallica collegata a terra) prima di toccare il prodotto.
- Non cercare di riparare il prodotto e non smontarlo mai. Per alcuni prodotti dotati di batteria sostituibile dall'utente, leggere e seguire le istruzioni riportate nel manuale dell'utente.
- Non versare cibi o liquidi sul prodotto e non spingere mai alcun oggetto nelle aperture del prodotto.
- Non usare questo prodotto vicino all'acqua, in aree con elevato grado di umidità o soggette a condensa a meno che il prodotto non sia specificatamente approvato per uso in ambienti esterni.
- Tenere il prodotto lontano da caloriferi e altre fonti di calore.
- Scollegare sempre il prodotto dalla presa elettrica prima di pulirlo e usare solo un panno asciutto che non lasci filacce.

## **VEILIGHEIDSINFORMATIE**

De volgende algemene veiligheidsinformatie werd verstrekt om uw eigen persoonlijke veiligheid te waarborgen en uw product te beschermen tegen mogelijke schade. Denk eraan om de gebruikersinstructies van het product te raadplegen voor meer informatie.

- Statische elektriciteit kan schadelijk zijn voor elektronische componenten. Ontlaad de statische elektriciteit van uw lichaam (d.w.z. het aanraken van geaard bloot metaal) voordat u het product aanraakt.
- U mag nooit proberen het product te onderhouden en u mag het product nooit demonteren. Voor sommige producten met door de gebruiker te vervangen batterij, dient u de instructies in de gebruikershandleiding te lezen en te volgen.
- Mors geen voedsel of vloeistof op uw product en u mag nooit voorwerpen in de openingen van uw product duwen.
- Gebruik dit product niet in de buurt van water, gebieden met hoge vochtigheid of condensatie, tenzij het product specifiek geclassificeerd is voor gebruik buitenshuis.
- Houd het product uit de buurt van radiators en andere warmtebronnen.
- U dient het product steeds los te koppelen van de stroom voordat u het reinigt en gebruik uitsluitend een droge pluisvrije doek.

## Disposing of and Recycling Your Product

### ENGLISH

EN



This symbol on the product or packaging means that according to local laws and regulations this product should not be disposed of in household waste but sent for recycling. Please take it to a collection point designated by your local authorities once it has reached the end of its life, some will accept products for free. By recycling the product and its packaging in this manner you help to conserve the environment and protect human health.

### D-Link and the Environment

At D-Link, we understand and are committed to reducing any impact our operations and products may have on the environment. To minimise this impact D-Link designs and builds its products to be as environmentally friendly as possible, by using recyclable, low toxic materials in both products and packaging.

D-Link recommends that you always switch off or unplug your D-Link products when they are not in use. By doing so you will help to save energy and reduce CO2 emissions.

To learn more about our environmentally responsible products and packaging please visit [www.dlinkgreen.com](http://www.dlinkgreen.com).

### DEUTSCH

DE



Dieses Symbol auf dem Produkt oder der Verpackung weist darauf hin, dass dieses Produkt gemäß bestehender örtlicher Gesetze und Vorschriften nicht über den normalen Hausmüll entsorgt werden sollte, sondern einer Wiederverwertung zuzuführen ist. Bringen Sie es bitte zu einer von Ihrer Kommunalbehörde entsprechend amtlich ausgewiesenen Sammelstelle, sobald das Produkt das Ende seiner Nutzungsdauer erreicht hat. Für die Annahme solcher Produkte erheben einige dieser Stellen keine Gebühren. Durch ein auf diese Weise durchgeführtes Recycling des Produkts und seiner Verpackung helfen Sie, die Umwelt zu schonen und die menschliche Gesundheit zu schützen.

### D-Link und die Umwelt

D-Link ist sich den möglichen Auswirkungen seiner Geschäftstätigkeiten und seiner Produkte auf die Umwelt bewusst und fühlt sich verpflichtet, diese entsprechend zu mindern. Zu diesem Zweck entwickelt und stellt D-Link seine Produkte mit dem Ziel größtmöglicher Umweltfreundlichkeit her und verwendet wiederverwertbare, schadstoffarme Materialien bei Produktherstellung und Verpackung.

D-Link empfiehlt, Ihre Produkte von D-Link, wenn nicht in Gebrauch, immer auszuschalten oder vom Netz zu nehmen. Auf diese Weise helfen Sie, Energie zu sparen und CO2-Emissionen zu reduzieren.

Wenn Sie mehr über unsere umweltgerechten Produkte und Verpackungen wissen möchten, finden Sie entsprechende Informationen im Internet unter [www.dlinkgreen.com](http://www.dlinkgreen.com).

**FRANÇAIS****FR**

Ce symbole apposé sur le produit ou son emballage signifie que, conformément aux lois et réglementations locales, ce produit ne doit pas être éliminé avec les déchets domestiques mais recyclé. Veuillez le rapporter à un point de collecte prévu à cet effet par les autorités locales; certains accepteront vos produits gratuitement. En recyclant le produit et son emballage de cette manière, vous aidez à préserver l'environnement et à protéger la santé de l'homme.

**D-Link et l'environnement**

Chez D-Link, nous sommes conscients de l'impact de nos opérations et produits sur l'environnement et nous engageons à le réduire. Pour limiter cet impact, D-Link conçoit et fabrique ses produits de manière aussi écologique que possible, en utilisant des matériaux recyclables et faiblement toxiques, tant dans ses produits que ses emballages.

D-Link recommande de toujours éteindre ou débrancher vos produits D-Link lorsque vous ne les utilisez pas. Vous réaliserez ainsi des économies d'énergie et réduirez vos émissions de CO<sub>2</sub>.

Pour en savoir plus sur les produits et emballages respectueux de l'environnement, veuillez consulter le [www.dlinkgreen.com](http://www.dlinkgreen.com).

**ESPAÑOL****ES**

Este símbolo en el producto o el embalaje significa que, de acuerdo con la legislación y la normativa local, este producto no se debe desechar en la basura doméstica sino que se debe reciclar. Llévelo a un punto de recogida designado por las autoridades locales una vez que ha llegado al fin de su vida útil; algunos de ellos aceptan recogerlos de forma gratuita. Al reciclar el producto y su embalaje de esta forma, contribuye a preservar el medio ambiente y a proteger la salud de los seres humanos.

**D-Link y el medio ambiente**

En D-Link, comprendemos y estamos comprometidos con la reducción del impacto que puedan tener nuestras actividades y nuestros productos en el medio ambiente. Para reducir este impacto, D-Link diseña y fabrica sus productos para que sean lo más ecológicos posible, utilizando materiales reciclables y de baja toxicidad tanto en los productos como en el embalaje.

D-Link recomienda apagar o desenchufar los productos D-Link cuando no se estén utilizando. Al hacerlo, contribuirá a ahorrar energía y a reducir las emisiones de CO<sub>2</sub>.

Para obtener más información acerca de nuestros productos y embalajes ecológicos, visite el sitio [www.dlinkgreen.com](http://www.dlinkgreen.com).

**ITALIANO****IT**

La presenza di questo simbolo sul prodotto o sulla confezione del prodotto indica che, in conformità alle leggi e alle normative locali, questo prodotto non deve essere smaltito nei rifiuti domestici, ma avviato al riciclo. Una volta terminato il ciclo di vita utile, portare il prodotto presso un punto di raccolta indicato dalle autorità locali. Alcuni questi punti di raccolta accettano gratuitamente i prodotti da riciclare. Scegliendo di riciclare il prodotto e il relativo imballaggio, si contribuirà a preservare l'ambiente e a salvaguardare la salute umana.

**D-Link e l'ambiente**

D-Link cerca da sempre di ridurre l'impatto ambientale dei propri stabilimenti e dei propri prodotti. Allo scopo di ridurre al minimo tale impatto, D-Link progetta e realizza i propri prodotti in modo che rispettino il più possibile l'ambiente, utilizzando materiali riciclabili a basso tasso di tossicità sia per i prodotti che per gli imballaggi.

D-Link raccomanda di spegnere sempre i prodotti D-Link o di scollegarne la spina quando non vengono utilizzati. In questo modo si contribuirà a risparmiare energia e a ridurre le emissioni di anidride carbonica.

Per ulteriori informazioni sui prodotti e sugli imballaggi D-Link a ridotto impatto ambientale, visitate il sito all'indirizzo [www.dlinkgreen.com](http://www.dlinkgreen.com).

**NEDERLANDS****NL**

Dit symbool op het product of de verpakking betekent dat dit product volgens de plaatselijke wetgeving niet mag worden weggegooid met het huishoudelijk afval, maar voor recyclage moeten worden ingeleverd. Zodra het product het einde van de levensduur heeft bereikt, dient u het naar een inzamelpunt te brengen dat hiertoe werd aangeduid door uw plaatselijke autoriteiten, sommige autoriteiten accepteren producten zonder dat u hiervoor dient te betalen. Door het product en de verpakking op deze manier te recyclen helpt u het milieu en de gezondheid van de mens te beschermen.

**D-Link en het milieu**

Bij D-Link spannen we ons in om de impact van onze handelingen en producten op het milieu te beperken. Om deze impact te beperken, ontwerpt en bouwt D-Link zijn producten zo milieuvriendelijk mogelijk, door het gebruik van recycleerbare producten met lage toxiciteit in product en verpakking.

D-Link raadt aan om steeds uw D-Link producten uit te schakelen of uit de stekker te halen wanneer u ze niet gebruikt. Door dit te doen bespaart u energie en beperkt u de CO<sub>2</sub>-emissies.

Breng een bezoek aan [www.dlinkgreen.com](http://www.dlinkgreen.com) voor meer informatie over onze milieuverantwoorde producten en verpakkingen.

**POLSKI****PL**

Ten symbol umieszczony na produkcie lub opakowaniu oznacza, że zgodnie z miejscowym prawem i lokalnymi przepisami niniejszego produktu nie wolno wyrzucać jak odpady czy śmieci z gospodarstwa domowego, lecz należy go poddać procesowi recyklingu. Po zakończeniu użytkowania produktu, niektóre odpowiednie do tego celu podmioty przyjmą takie produkty nieodpłatnie, dlatego prosimy dostarczyć go do punktu zbiórki wskazanego przez lokalne władze. Poprzez proces recyklingu i dzięki takiemu postępowaniu z produktem oraz jego opakowaniem, pomogą Państwo chronić środowisko naturalne i dbać o ludzkie zdrowie.

**D-Link i środowisko**

D-Link podchodzimy w sposób świadomy do ochrony otoczenia oraz jesteśmy zaangażowani w zmniejszanie wpływu naszych działań i produktów na środowisko naturalne. W celu zminimalizowania takiego wpływu firma D-Link konstruuje i wytwarza swoje produkty w taki sposób, aby były one jak najbardziej przyjazne środowisku, stosując do tych celów materiały nadające się do powtórnego wykorzystania, charakteryzujące się małą toksycznością zarówno w przypadku samych produktów jak i opakowań.

Firma D-Link zaleca, aby Państwo zawsze prawidłowo wyłączali z użytku swoje produkty D-Link, gdy nie są one wykorzystywane. Postępując w ten sposób pozwalają Państwo oszczędzać energię i zmniejszać emisje CO<sub>2</sub>.

Aby dowiedzieć się więcej na temat produktów i opakowań mających wpływ na środowisko prosimy zapoznać się ze stroną Internetową [www.dlinkgreen.com](http://www.dlinkgreen.com).

**ČESKY****CZ**

Tento symbol na výrobku nebo jeho obalu znamená, že podle místně platných předpisů se výrobek nesmí vyhazovat do komunálního odpadu, ale odeslat k recyklaci. Až výrobek doslouží, odneste jej prosím na sběrné místo určené místními úřady k tomuto účelu. Některá sběrná místa přijímají výrobky zdarma. Recyklací výrobku i obalu pomáháte chránit životní prostředí i lidské zdraví.

**D-Link a životní prostředí**

Ve společnosti D-Link jsme si vědomi vlivu našich provozů a výrobků na životní prostředí a snažíme se o minimalizaci těchto vlivů. Proto své výrobky navrhujeme a vyrábíme tak, aby byly co nejekologičtější, a ve výrobcích i obalech používáme recyklovatelné a nízkotoxické materiály.

Společnost D-Link doporučuje, abyste své výrobky značky D-Link vypnuli nebo vytáhli ze zásuvky vždy, když je nepoužíváte. Pomůžete tak šetřit energii a snížit emise CO<sub>2</sub>.

Více informací o našich ekologických výrobcích a obalech najdete na adrese [www.dlinkgreen.com](http://www.dlinkgreen.com).

**MAGYAR****HU**

Ez a szimbólum a terméken vagy a csomagoláson azt jelenti, hogy a helyi törvényeknek és szabályoknak megfelelően ez a termék nem semmisíthető meg a háztartási hulladékkal együtt, hanem újrahasznosításra kell küldeni. Kérjük, hogy a termék élettartamának elteltét követően vigye azt a helyi hatóság által kijelölt gyűjtőhelyre. A termékek egyes helyeken ingyen elhelyezhetők. A termék és a csomagolás újrahasznosításával segíti védeni a környezetet és az emberek egészségét.

**A D-Link és a környezet**

A D-Linknél megértjük és elkötelezettek vagyunk a műveleteink és termékeink környezetre gyakorolt hatásainak csökkentésére. Az ezen hatás csökkentése érdekében a D-Link a lehető leginkább környezetbarát termékeket tervez és gyárt azért, hogy újrahasznosítható, alacsony károsanyag-tartalmú termékeket gyárt és csomagolásokat alkalmaz.

A D-Link azt javasolja, hogy mindig kapcsolja ki vagy húzza ki a D-Link termékeket a tápforrásból, ha nem használja azokat. Ezzel segít az energia megtakarításában és a széndioxid kibocsátásának csökkentésében.

Környezetbarát termékeinkről és csomagolásainkról további információkat a [www.dlinkgreen.com](http://www.dlinkgreen.com) weboldalon tudhat meg.

**NORSK****NO**

Dette symbolet på produktet eller forpakningen betyr at dette produktet ifølge lokale lover og forskrifter ikke skal kastes sammen med husholdningsavfall, men leveres inn til gjenvinning. Vennligst ta det til et innsamlingssted anvist av lokale myndigheter når det er kommet til slutten av levetiden. Noen steder aksepteres produkter uten avgift. Ved på denne måten å gjenvinne produktet og forpakningen hjelper du å verne miljøet og beskytte folks helse.

**D-Link og miljøet**

Hos D-Link forstår vi oss på og er forpliktet til å minske innvirkningen som vår drift og våre produkter kan ha på miljøet. For å minimalisere denne innvirkningen designer og lager D-Link produkter som er så miljøvennlig som mulig, ved å bruke resirkulerbare, lav-toksiske materialer både i produktene og forpakningen.

D-Link anbefaler at du alltid slår av eller frakobler D-Link-produkter når de ikke er i bruk. Ved å gjøre dette hjelper du å spare energi og å redusere CO<sub>2</sub>-utslipp.

For mer informasjon angående våre miljøansvarlige produkter og forpakninger kan du gå til [www.dlinkgreen.com](http://www.dlinkgreen.com).

**DANSK****DK**

Dette symbol på produktet eller emballagen betyder, at dette produkt i henhold til lokale love og regler ikke må bortskaffes som husholdningsaffald, mens skal sendes til genbrug. Indlever produktet til et indsamlingssted som angivet af de lokale myndigheder, når det er nået til slutningen af dets levetid. I nogle tilfælde vil produktet blive modtaget gratis. Ved at indlevere produktet og dets emballage til genbrug på denne måde bidrager du til at beskytte miljøet og den menneskelige sundhed.

**D-Link og miljøet**

Hos D-Link forstår vi og bestræber os på at reducere enhver indvirkning, som vores aktiviteter og produkter kan have på miljøet. For at minimere denne indvirkning designer og producerer D-Link sine produkter, så de er så miljøvenlige som muligt, ved at bruge genanvendelige materialer med lavt giftighedsniveau i både produkter og emballage.

D-Link anbefaler, at du altid slukker eller frakobler dine D-Link-produkter, når de ikke er i brug. Ved at gøre det bidrager du til at spare energi og reducere CO<sub>2</sub>-udledningerne.

Du kan finde flere oplysninger om vores miljømæssigt ansvarlige produkter og emballage på [www.dlinkgreen.com](http://www.dlinkgreen.com).

**SUOMI****FI**

Tämä symboli tuotteen pakkauksessa tarkoittaa, että paikallisten lakien ja säännösten mukaisesti tätä tuotetta ei pidä hävittää yleisen kotitalousjätteen seassa vaan se tulee toimittaa kierrätettäväksi. Kun tuote on elinkaarensa päässä, toimita se lähimpään viranomaisten hyväksymään kierrätyspisteeseen. Kierrättämällä käytetyn tuotteen ja sen pakkauksen autat tukemaan sekä ympäristön että ihmisten terveyttä ja hyvinvointia.

**D-Link ja ympäristö**

D-Link ymmärtää ympäristönsuojelun tärkeyden ja on sitoutunut vähentämään tuotteistaan ja niiden valmistuksesta ympäristölle mahdollisesti aiheutuvia haittavaikutuksia. Nämä negatiiviset vaikutukset minimoidakseen D-Link suunnittelee ja valmistaa tuotteensa mahdollisimman ympäristöystävällisiksi käyttämällä kierrätettäviä, alhaisia pitoisuuksia haitallisia aineita sisältäviä materiaaleja sekä tuotteissaan että niiden pakkauksissa.

Suosittellemme, että irrotat D-Link-tuotteesi virtalähteestä tai sammutat ne aina, kun ne eivät ole käytössä. Toimimalla näin autat säästämään energiaa ja vähentämään hiilidioksiidipäästöjä.

Lue lisää ympäristöystävällisistä D-Link-tuotteista ja pakkauksistamme osoitteesta [www.dlinkgreen.com](http://www.dlinkgreen.com).

**SVENSKA****SE**

Den här symbolen på produkten eller förpackningen betyder att produkten enligt lokala lagar och föreskrifter inte skall kastas i hushållssoporna utan i stället återvinnas. Ta den vid slutet av dess livslängd till en av din lokala myndighet utsedd uppsamlingsplats, vissa accepterar produkter utan kostnad. Genom att på detta sätt återvinna produkten och förpackningen hjälper du till att bevara miljön och skydda människors hälsa.

**D-Link och miljön**

På D-Link förstår vi och är fast beslutna att minska den påverkan våra verksamheter och produkter kan ha på miljön. För att minska denna påverkan utformar och bygger D-Link sina produkter för att de ska vara så miljövänliga som möjligt, genom att använda återvinningsbara material med låg gifthalt i både produkter och förpackningar.

D-Link rekommenderar att du alltid stänger av eller kopplar ur dina D-Link produkter när du inte använder dem. Genom att göra detta hjälper du till att spara energi och minska utsläpp av koldioxid.

För mer information om våra miljöansvariga produkter och förpackningar [www.dlinkgreen.com](http://www.dlinkgreen.com).

**PORTUGUÊS****PT**

Este símbolo no produto ou embalagem significa que, de acordo com as leis e regulamentações locais, este produto não deverá ser eliminado juntamente com o lixo doméstico mas enviado para a reciclagem. Transporte-o para um ponto de recolha designado pelas suas autoridades locais quando este tiver atingido o fim da sua vida útil, alguns destes pontos aceitam produtos gratuitamente. Ao reciclar o produto e respectiva embalagem desta forma, ajuda a preservar o ambiente e protege a saúde humana.

**A D-Link e o ambiente**

Na D-Link compreendemos e comprometemo-nos com a redução do impacto que as nossas operações e produtos possam ter no ambiente. Para minimizar este impacto a D-Link concebe e constrói os seus produtos para que estes sejam o mais inofensivos para o ambiente possível, utilizando materiais recicláveis e não tóxicos tanto nos produtos como nas embalagens.

A D-Link recomenda que desligue os seus produtos D-Link quando estes não se encontrarem em utilização. Com esta acção ajudará a poupar energia e reduzir as emissões de CO<sub>2</sub>.

Para saber mais sobre os nossos produtos e embalagens responsáveis a nível ambiental visite [www.dlinkgreen.com](http://www.dlinkgreen.com).

**D-Link Systems, Inc.**

14420 Myford Rd. Suite 100. Irvine, CA 92606

+1 714 885 6333