Use of video equipment for recording the image of a person without their knowledge and consent is prohibited in certain jurisdictions. Nothing herein represents a warranty or representation that the D-Link product provided herein is suitable for the end-user's intended use under the applicable laws of his or her jurisdiction. D-Link disclaims any liability whatsoever for any end-user use of the D-Link product which fails to comply with applicable laws. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted on the packaging. See inside package for warranty details. Prices and specifications subject to change without notice. Visit your local D-Link website for technical support details.
©2020 D-Link Corporation. All rights reserved. D-Link and the D-Link logo trademarks or registered trademarks of D-Link Corporation. All other trademarks or registered trademarks are the property of their respective manufacturers. Internet Explorer is a registered trademark of Microsoft Corporation in the United States and/or other countries. Firefox is a registered trademark of the Mozilla Foundation in the United States and/or other countries. Safari is a trademark of Apple Inc., registered in the United States and other countries.

Package Contents

+ DCS-4618EK Megapixel H.265 Outdoor Dome Camera
+ Cable Waterproofing Connector
+ Mounting Kit
+ Allen Key
+ Alignment Sticker
+ Documentation

Warranty

+ D-Link 2-year warranty

Minimum Requirements

Network switch supporting 10/100 Fast Ethernet and 802.3af Power over Ethernet

Browser requirement:
+ Operating System: Microsoft Windows System
+ Browser: Internet Explorer 11 for full function; Chrome, Firefox (MJPEG only)

For Internet access:
+ Cable or ADSL Internet service
+ Cable or ADSL modem/router with Ethernet connection

Registered office
D-Link (Europe) Ltd.
First Floor, Artemis Building, Odyssey Business Park,
West End Road, South Ruislip, HA4 6QE, United Kingdom
www.dlink.com
Tech Support: eu.dlink.com/support

Ver 1.00EU1 2020/11/11

DCS-4618EK

Additional Languages Supported: (UK) Bulgarian (UK) Hrvatski, (UK) Čeština, (UK) Dansk, (UK) Eesti, (UK) Suomi, (UK) Norsk, (UK) Romana, (UK) Slovenčina, (UK) Slovenski, (UK) Svenska

(UK) DEUTSCH
• 8 Megapixel, 20 fps
• IR LED Tag und Nacht Filter für hohe Nachtbildqualität
• Wasserdichtes bis zu 30 m
• WDR (Wide Dynamic Range) für Außenbereiche

(UK) ENGLISH
• 8 Megapixel, 20 fps
• Day & Night with ICR filter
• Wide Dynamic Range
• Waterproof up to 30 m
• 3D noise reduction
• Conforming to Industrial Ethernet (802.3af)

(UK) FRANCAIS
• 8 megapixels, 20 ips
• Jour et nuit avec filtre ICR
• Mode dynamique étendue
• Étanche jusqu'à 30 m
• Réduction du bruit 3D
• Conforme à la norme Ethernet industrielle (802.3af)

(UK) ITALIANO
• 8 Megapixel, 20 fps
• Videocamera a cupola da esterno con filtro ICR a IR LED
• Visione notturna fino a 30 m
• Wide Dynamic Range
• Certificate per ambiente IP66

(UK) NEDERLANDS
• 8 Megapixel, 20 fps
• Dag en nacht met ICR-filter en IR-LED
• Breed dynamisch bereik
• Bestand tegen water tot 30 m
• IP66 geschikt voor buitenshuis

(UK) NORSK
• 8 Megapixel, 20 b/s
• Dag og natt med ICR-filter en IR-LED
• Dim nattsyn
• Bred dynamisk rekkevidde
• IP66 godkjent for utendørsbruk

(UK) PORTUGUÊS
• 8 Megapixel, 20 fps
• Dia e de noite com filtro ICR e LED de IV
• Ver no escuro
• Wide Dynamic Range
• Resistente à água até 30 m
• Adequado para ambientes externos IP66

(UK) ЕЛЛНЗІКА
• 8 Megapixel, 20 fps
• Ημέρα και νύχτα με φίλτρο ICR και LED υπερύθρων
• Λειτουργία υπερβολικού φωτός
• Ανθεκτικό στο νερό έως και 30 m
• Μείωση θορύβου 3D
• Συμβατό με βιομηχανικά πρότυπα Ethernet (802.3af)

(UK) ČESKY
• 8 Megapixel, 20 snímků za sekundu
• Den a noc s filtrem ICR a IR LED
• Ultra noční IR na 30 m
• Wide Dynamic Range
• Odolná proti vodě do hloubky 30 m
• Snížení šumu 3D
• Kompatibilní s průmyslovými normami Ethernet (802.3af)

(UK) MAGYAR
• 8 Megapixel, 20 fps
• Nappal és éjszaka IR LED
• 30 m-es éjszaka látótávolság
• Szélesebb dinamikus tartomány
• IP66 kültéri használatra

(UK) ΕΛΛΗΝΙΚΑ
• 8 Megapixel, 20 fps
• Ημέρα και νύχτα με φίλτρο ICR και LED υπερύθρων
• Ανθεκτικό στο νερό έως και 30 m
• Μείωση θορύβου 3D
• Συμβατό με βιομηχανικά πρότυπα Ethernet (802.3af)

(UK) ROMÂNĂ
• 8 Megapixel, 20 cps
• Zi și noapte cu filtru ICR și LED de IR
• Vedere în întuneric
• Rezistent la apă de până la 30 m
• Reducere a zgomotului 3D
• Compatibil cu standardele industriale Ethernet (802.3af)

(UK) SLOVENSKO
• 8 Megapixel, 20 sličic na sekundo
• Dan in noč s filtrom ICR in LED-ov IR
• Izboljšano delovanje v temnem
• Vodoodporno do globine 30 m
• Zatemnitev šumov 3D
• Skladen z industrijskimi standardi Ethernet (802.3af)

(UK) ПО-РУССКИ
• 8 Мегапиксел, 20 кадр/с
• Дневная и ночная съемка с ИК-фильтром
• Видение в темноте
• Степень защиты IP66
• Шумоподавление 3D
• Совместимость с промышленными стандартами Ethernet (802.3af)

(UK) SVENSKA
• 8 Megapixel, 20 fps
• Dag och natt med ICR-filter och IR-LED
• Mörkersikt
• Vattentät upp till 30 m
• Brett dynamiskt omfång
• Lämpar sig för utomhusbruk IP66

(UK) TÜRKÇE
• 8 Megapixel, 20 kare/sn
• Gündüz ve gece ICR'li IR LED
• Yüksek çözünürlüklü görüntüler
• Suya dayanıklı 30 m
• 3D gürültü azaltma
• Endüstriyel Ethernet (802.3af) standartlarına uyumludur

Camera Features

- 8 Megapixel, 20 fps
- Day and night with ICR filter and IR LED
- 30m night vision
- Wide Dynamic Range
- 3D Noise Reduction
- Supports Power over Ethernet
- IP66 outdoor certified

Hardware Features	Indoor/Outdoor	Indoor and Outdoor IP66
	Maximum Video Resolution (Ratio)	3840 x 2160
	Minimum Illumination (Lux)	Colour: 0.02 Lux (F1.4, AGC on) B/W: 0 Lux (IR LED on)
	Night Vision with Built-in IR	30m
	Wide Dynamic Range (WDR)	•
	3D Noise Reduction	•
	Network Connectivity	Fast Ethernet with Power over Ethernet (802.3af)
	Gimbal 3-Axis	•
Software Features	Video Format	H.265, H.264, MJPEG
	Multi-Stream	•
	ONVIF	•
	Motion Detection	•

8 Megapixel H.265 Outdoor Dome Camera

DCS-4618EK
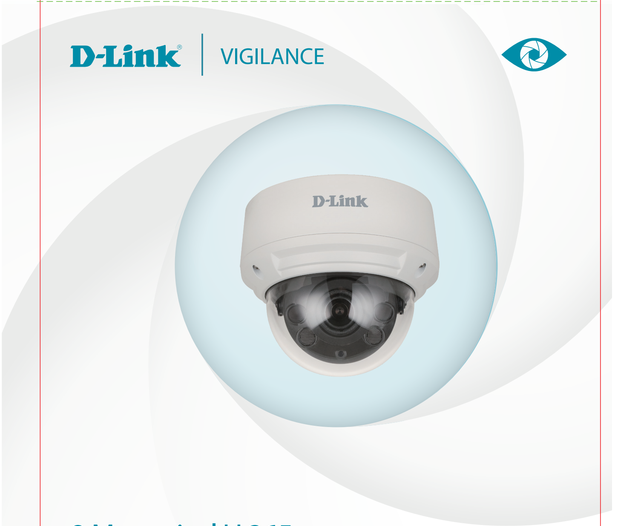
The 8 Megapixel H.265 Outdoor Dome Camera is a professional, full featured high-resolution camera. that is designed to be easy to install and integrated into a highly affordable video surveillance solution. Incorporating IR LED illuminator, WDR and 3DNR support, you get up to 30 meters night vision and clear detailed images in constating and low light environments. The camera's IP-66 (weather-proof) housing is specifically designed to withstand all adverse weather conditions. It supports H.265 to optimise network bandwidth for better visual quality and recording performance.