

3MP 30X IR High Speed Dome Camera

High-resolution PTZ camera with wide operating temperature range

DCS-P913



- 1/2.8" 3 megapixel progressive CMOS sensor
- High resolution: 2048 x 1536
- H.265 / H.264 / MJPEG compatibility
- 30X optical zoom lens (f4.5 - f135mm @ F1.6 - F4.4)
- Wide Dynamic Range (WDR)
- Auto Tracking
- CVBS output
- Built-in IR LED illuminator with 200 m range
- IP66-rated housing
- Wide operating temperature of -40°C - 60°C (-40°F - 140°F)
- Supports 2D/3D noise reduction
- ONVIF Profile S compliant
- Supports D-Link's free D-ViewCam suite of management software



IP66 Compliant

Water-resistant, dust-tight IP66-rated housing



3 Megapixel Resolution

High-quality display with 3 megapixel resolution




Day or Night

Infrared (IR) for nighttime operation up to 200 meters



30X Optical Zoom

Features 30X zoom capability with PTZ functionality



Wide Operating Temperature

Operating temperature range of -40°C to 60°C



Wide Dynamic Range

Improved image quality in high-contrast conditions with WDR

Camera

Camera Hardware Profile
 Image sensor: 1/2.8" 3-megapixel progressive scan CMOS sensor
 200 meter IR illumination distance
 Minimum illumination:
 Color: 0.01Lux @(F1.6, AGC ON)
 B/W: 0Lux @ (IR LED ON)
 Focal length: f4.5 - f135 mm
 Aperture: F1.6 - F4.4
 30X optical zoom, 16X digital zoom
 Angle of view: (H) 59.8° - 2.3°
 Electronic shutter: Auto/Manual 1/5 - 1/20,000s

PTZ Hardware Profile
 Pan travel: 360° endless
 Tilt travel: -10° to +90°
 Pan speed: 180°/s, Tilt: 90°/s
 Manual control speed:
 Pan: 0.1° - 180°/s, Tilt: 0.1 - 90°/s
 Presets: 400 points
 Preset speed: 180°/s, Tilt: 90°/s
 Track paths: 6
 Tour paths: 12
 Scan paths: 12


Image Feature
 Configurable privacy mask
 Auto tracking
 WDR

Video Compression
 Simultaneous H.265/H264/MJPEG encoder compression

Max. Video Resolution and Frame Rate
 2048 x 1536, up to 30 fps

Audio Support
 G.711 and RAW PCM audio compression

External Device Interfaces
 10/100 Base-TX Fast Ethernet port
 Audio line in: Yes
 Audio line out: Yes
 Digital Input (DI): Yes (x7)
 Digital Output (DO) : No (x2)
 Video output (BNC): Yes
 RS485: Yes (Supports Pelco D)
 AC 24V input : Yes
 DC 12V input : No
 Factory reset : No

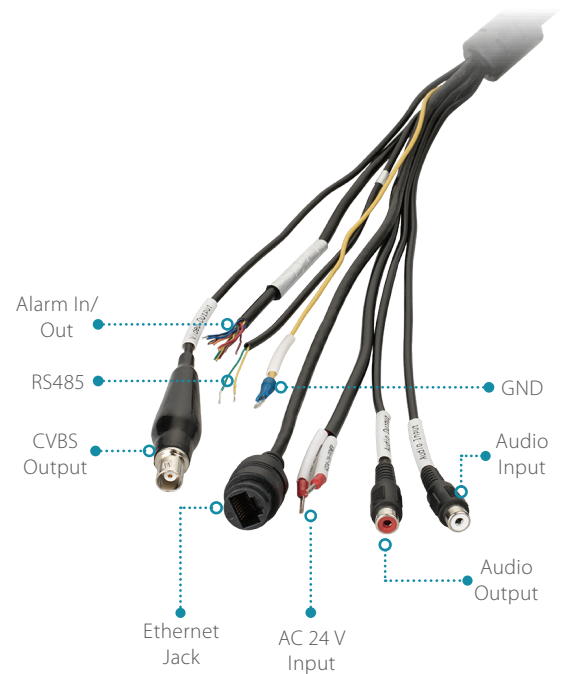

Network

Network Protocols
 IPv4
 HTTP/HTTPS
 RTSP/RTP/RTCP
 TCP
 UDP
 DHCP
 DNS
 DDNS
 NTP
 FTP
 SMTP Client
 ONVIF Profile S compliant
 ARP
 ICMP
 802.1X
 PPPoE
 SNMP v1/v2/v3

System Management

Event Management	Motion detection Digital input and output Event notification and uploading of snapshots via e-mail or FTP PTZ linkage
System Requirements for Web Interface	Operating System: Microsoft Windows Browser: Internet Explorer 11; Chrome and Firefox (MJPEG Only)

General

Weight	5.2 Kg \pm 5 % (Not including bracket) 8 Kg \pm 5 % (Including bracket)
Power	Mid-Span PoE injector (Attached) 24VAC@2.5A (not included)
Power Consumption	Max 40W
Temperature	Operating Temperature: -40°C - 60°C (-40°F - 140 °F) Storage Temperature: -20°C - 70°C (-4°F - 158°F)
Humidity	Storage: Max 90% RH Operating: Max 90% RH
Bracket	Wall mount bracket x 1
Certifications	CE FCC

Order Information

/ DCS-P913

DCS-P913	3MP 30X IR High Speed Dome Camera PTZ
Hardware Version	A

