

**DES-1210-08P/28 / 28P / 52**

# **WEB UI REFERENCE GUIDE**

## **WEB SMART SWITCH**



## Table of Contents

<b>Table of Contents .....</b>	<b>i</b>
<b>About This Guide.....</b>	<b>1</b>
Terms/Usage.....	1
Copyright and Trademarks .....	1
<b>1 Product Introduction .....</b>	<b>2</b>
DES-1210-08P .....	3
Front Panel .....	3
Rear Panel.....	3
DES-1210-28 .....	3
Front Panel .....	3
Rear Panel.....	4
DES-1210-28P .....	4
Front Panel .....	4
Rear Panel.....	5
DES-1210-52 .....	5
Front Panel .....	5
Rear Panel.....	6
<b>2 Hardware Installation .....</b>	<b>7</b>
Step 1: Unpacking.....	7
Step 2: Switch Installation.....	7
Desktop or Shelf Installation.....	7
Rack Installation .....	7
Step 3 – Plugging in the AC Power Cord.....	8
Power Failure .....	9
<b>3 Getting Started.....</b>	<b>10</b>
Management Options.....	10
Using Web-based Management .....	10
Supported Web Browsers .....	10
Connecting to the Switch.....	10
Login Web-based Management .....	11
Smart Wizard .....	11
Web-based Management.....	11
SmartConsole Utility.....	11
<b>4 SmartConsole Utility .....</b>	<b>13</b>
SmartConsole Settings .....	13
Utility Settings.....	13
Log.....	14
Trap .....	14
File.....	14
Help .....	15
Device Configuration.....	16
Add(+), Delete(-) and Discover the device .....	18
Device List.....	18
<b>5 Configuration .....</b>	<b>20</b>
Smart Wizard Configuration .....	20
Password Settings.....	20
SNMP Settings .....	21

System Settings.....	22
Web-based Management.....	23
Tool Bar > Save Menu .....	24
Save Configuration .....	24
Save Log .....	24
Tool Bar > Tool Menu .....	24
Reset .....	24
Reset System .....	24
Reboot Device .....	24
Configuration Backup & Restore .....	25
Firmware Backup and Upload .....	25
Tool Bar > Smart Wizard.....	26
Tool Bar > Online Help.....	26
Function Tree .....	28
Device Information.....	28
System > System Settings .....	29
System > DHCP Auto Configuration .....	29
System > Trap Settings (For SmartConsole) .....	30
System > Port Settings.....	30
System > SNMP Settings > SNMP Global State .....	31
System > SNMP Settings > SNMP User Table.....	32
System > SNMP Settings > SNMP Group Table State .....	32
System > SNMP Settings > SNMP View Table .....	33
System > SNMP Settings > SNMP Community Table .....	33
System > SNMP Settings > SNMP Host Table .....	34
System > SNMP Settings > SNMP Engine ID .....	34
System > SNMP Settings > SNMP Trap Settings.....	34
System > Password Access Control .....	35
System > System Log Settings .....	35
Configuration > 802.1Q VLAN.....	35
Configuration > 802.1Q VLAN (Asymmetric VLAN) .....	37
Configuration > 802.1Q Management VLAN.....	39
Configuration > Auto Surveillance VLAN > Auto Surveillance VLAN Settings.....	39
Configuration > Voice VLAN > Voice VLAN Settings.....	40
Configuration > Voice VLAN > Voice VLAN OUI Setting .....	41
Configuration > Link Aggregation > Port Trunking .....	42
Configuration > Link Aggregation > LACP Port Settings.....	42
Configuration > IGMP Snooping .....	43
Configuration > Multicast Filtering Mode (For DES-1210-08P/28).....	45
Configuration > Multicast Filtering Mode (For DES-1210-28P/52).....	45
Configuration > Port Mirroring .....	46
Configuration > Loopback Detection .....	46
Configuration > SNTP Settings > Time Settings .....	47
Configuration > SNTP Settings > TimeZone Settings.....	48
Configuration > Spanning Tree > STP Global Settings.....	49
Configuration > Spanning Tree > STP Port Settings .....	50
QoS > Storm Control .....	52
QoS > Bandwidth Control.....	52
QoS > 802.1p/DSCP Priority Settings.....	53

Security > Trusted Host.....	54
Security > Safeguard Engine.....	55
Security > ARP Spoofing Prevention .....	55
Security > Port Security.....	56
Security > SSL Settings.....	57
Security > 802.1X > 802.1X Settings .....	57
Security > MAC Address Table > Static MAC.....	59
Security > MAC Address Table > Dynamic Forwarding Table.....	59
Security > DHCP Server Screening > DHCP Server Screening Port Settings .....	60
Monitoring > Statistics .....	61
Monitoring > Cable Diagnostics .....	62
Monitoring > System Log.....	62
ACL > ACL Configuration Wizard.....	63
ACL > ACL Profile List.....	64
ACL > ACL Finder .....	67
PoE > PoE Port Settings (Only for DES-1210-08P/28P) .....	67
PoE > PoE System Settings (Only for DES-1210-08P/28P).....	69
Time-Based PoE > Time Range Settings (Only for DES-1210-08P/28P) .....	69
LLDP > LLDP Global Settings (Only for DES-1210-08P/28P) .....	70
LLDP > LLDP Remote Port Information (Only for DES-1210-08P/28P) .....	70
LLDP > LLDP-MED Settings (Only for DES-1210-28P).....	71
<b>6 Command Line Interface.....</b>	<b>72</b>
To connect a switch via TELNET:.....	72
Logging on to the Command Line Interface:.....	72
CLI Commands: .....	72
Download.....	72
Upload .....	73
Config ipif system .....	73
Logout.....	74
Ping .....	74
Reboot .....	74
Reset .....	75
Show ipif .....	75
Show switch.....	75
Config account admin password .....	75
Save .....	76
Debug info .....	76
<b>Appendix A - Ethernet Technology.....</b>	<b>77</b>
Gigabit Ethernet Technology .....	77
Fast Ethernet Technology.....	77
Switching Technology .....	77
<b>Appendix B - Technical Specifications .....</b>	<b>78</b>
Hardware Specifications .....	78
Key Components / Performance .....	78
Port Functions .....	78
Physical & Environment .....	78
Emission (EMI) Certifications .....	78
Safety Certifications.....	78
Features .....	78



---

L2 Features .....	78
VLAN .....	78
QoS (Quality of Service).....	79
Security.....	79
Green.....	79
Management.....	79
<b>Appendix C – Rack mount Instructions .....</b>	<b>80</b>

---

## About This Guide

---

This guide provides instructions to install the D-Link Fast Ethernet Web Smart Switch DES-1210-08P/28/28P/52, how to use the SmartConsole Utility, and to configure Web-based Management step-by-step.



**Note:** The model you have purchased may appear slightly different from the illustrations shown in the document. Refer to the Product Instruction and Technical Specification sections for detailed information about your switch, its components, network connections, and technical specifications.

This guide is mainly divided into four parts:

1. Hardware Installation: Step-by-step hardware installation procedures.
2. Getting Started: A startup guide for basic switch installation and settings.
3. Smart Console Utility: An introduction to the central management system.
4. Configuration: Information about the function descriptions and configuration settings.

---

## Terms/Usage

---

In this guide, the term “Switch” (first letter capitalized) refers to the Smart Switch, and “switch” (first letter lower case) refers to other Ethernet switches. Some technologies refer to terms “switch”, “bridge” and “switching hubs” interchangeably, and both are commonly accepted for Ethernet switches.



A **NOTE** indicates important information that helps a better use of the device.



A **CAUTION** indicates potential property damage or personal injury.

---

## Copyright and Trademarks

---

Information in this document is subjected to change without notice.

© 201 D-Link Corporation. All rights reserved.

Reproduction in any manner whatsoever without the written permission of D-Link Corporation is strictly forbidden.

Trademarks used in this text: D-Link and the D-LINK logo are trademarks of D-Link Corporation; Microsoft and Windows are registered trademarks of Microsoft Corporation.

Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. D-Link Corporation disclaims any proprietary interest in trademarks and trade names other than its own.

## 1 Product Introduction

Thank you and congratulations on your purchase of D-Link Web Smart Switch Products.

D-Link's next generation Web Smart Ethernet switch series blends plug-and-play simplicity with exceptional value and reliability for small and medium-sized business (SMB) networking. All models are housed in a new style rack-mount metal case with easy-to-view front panel diagnostic LEDs, and provides advance features including two combo 1000BASE-T/SFP and two additional Gigabit uplinks, network security, traffic segmentation, QoS and versatile management.

**Flexible Port Configurations.** D-Link Web Smart Switches offer four port configurations, 24/48 Ethernet ports or 8/24 Ethernet ports with PoE support. All ports of the switch support auto MDI/MDIX feature which bring inexpensive and easy Ethernet connection to the desktops. Each switch provides 4 Gigabit uplinks connection to a Gigabit backbone or servers. Two of the Gigabit ports are SFP combo ports which support both 1000M and 100M fiber connections.

**Extensive Layer 2 Features.** Implemented as complete Layer 2 devices, these switches include functions such as IGMP Snooping, Port Mirroring, Spanning Tree, 802.3ad LACP and Loopback Detection to enhance performance and network resiliency.

**Traffic Segmentation and QoS.** The switches support 802.1Q VLAN tagging to enhance network security and performance. The switches also support 802.1p priority queues, enabling users to run bandwidth-sensitive applications such as multimedia streaming by prioritizing traffic in network. These functions allow switches to work seamlessly with VLAN and 802.1p traffic in the network. Auto Voice VLAN automatically places the voice traffic from IP phone to an assigned VLAN with higher priority, separating from normal traffic. Asymmetric VLAN is implemented in these switches for a more efficient use of shared resources such as server or gateway devices.

**Network Security.** D-Link's innovative Safeguard Engine function protects the switches against traffic flooding caused by virus attacks. Additional feature like 802.1X port-based authentication provides access control of the network with external RADIUS servers. ACL is a powerful tool to screen unwanted IP or MAC traffic. Storm Control keeps the network from being overwhelmed by abnormal traffic. Port Security is another simple but useful authentication method to maintain the integrity of the network device.

**Versatile Management.** The new generation of D-Link Web Smart Switches provides growing businesses simple and easy management of their network. The SmartConsole utility or a multi-language Web-Based management interface allows administrators to remotely control their network down to the port level. The intuitive SmartConsole easily allows customers to discover multiple D-Link web smart switches in the same L2 network segment. With this utility, users do not need to change the IP address of PC and provides easy initial setting of smart switches. The switches within the same L2 network segment connected to user's local PC are displayed on the screen for instant access. It allows extensive switch configuration setting, and basic configuration of discovered devices such as a password change or firmware upgrade.

Users can also access the Switch via Telnet. Basic tasks such as changing the Switch IP address, resetting the settings to factory defaults, setting the administrator password, rebooting the Switch, or upgrading the Switch firmware can be performed using the Command Line Interface (CLI).

In addition, users can utilize the SNMP MIB (*Management Information Base*) to poll switches for information about the status, or send out traps of abnormal events. SNMP support allows users to integrate the switches with other third-party devices for management in an SNMP-enabled environment. D-Link Web Smart Switches also come with the D-View plug-in module that works with D-View 6, SNMP Management Software which provides easy-to-use graphic interface and facilitates the operation efficiency.

## DES-1210-08P

8-Port 10/100Mbps PoE Web Smart Switch

### Front Panel

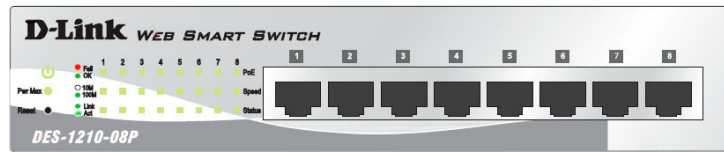


Figure 1 – DES-1210-08P Front Panel

**Power LED** : The Power LED lights up when the Switch is connected to a power source.

**Power Max LED**: The Power Max lights up when the system power resource remain  $\leq 7W$ , in the meantime, system will not provide power to the additional PoE PD inserted.

**Fan OK/Fail LED**: The FAN LED shows the status of the fans, the green light (OK) indicates that all fans work fine and the red light (Fail) indicate that on or multiple fans are working abnormally.

**PoE LED (1-8)**: The PoE LED lights up with solid green indicates power device is connected to corresponding port. Solid amber indicates a PoE error has occurred at this port. And light off indicates this port is not providing the power or no PD found.

**Port Speed LED (1-8)**: The Port Speed LED lights up with solid green indicate the corresponding port is running on 100M. Light off indicated that port is running on 10M.

**Port Link/Act LED (1-8)**: The Link/Act LED lights up with solid green indicate a network link through the corresponding port. Blinking indicates that the Switch is either sending or receiving data to the port.

**Reset**: By pressing the Reset button the Switch will change back to the default configuration and all changes will be lost.

### Rear Panel



Figure 2 – DES-1210-08P Rear Panel

**DC Power Jack**: The power jack is where to connect the DC power cord of power adapter.

**Power Switch**: Use to turn on/off the Switch.

## DES-1210-28

24-Port 10/100Mbps with 4-Port 10/100/1000Mbps Copper and 2 Combo SFP Web Smart Switch

### Front Panel

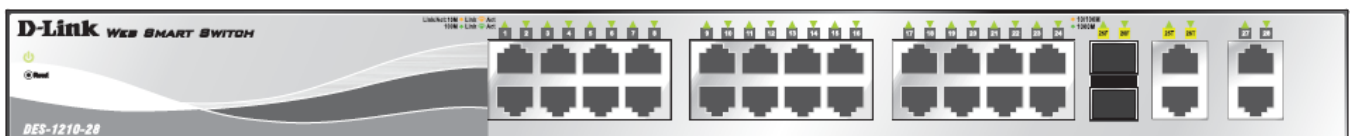


Figure 3 – DES-1210-28 Front Panel

**Power LED** : The Power LED lights up when the Switch is connected to a power source.

**Port Link/Act/Speed LED (1-24)**: The Link/Act/Speed LED flashes which indicates a network link through the corresponding port. Blinking indicates that the Switch is either sending or receiving data to the port. When a port has amber light indicates that port is running on 10M. When it has a green light it is running on 100M.

**Port Link/Act/Speed LED (25F, 26F, 25T, 26T, 27, 28):** The Link/Act/Speed LED flashes which indicates a network link through the corresponding port. Blinking indicates that the Switch is either sending or receiving data to the port. When a port has amber light indicates that port is running on 10M or 100M. When it has a green light it is running on 1000M.



**NOTE:** On DES-1210-28, the MiniGBIC ports are shared with normal RJ-45 ports 25 and 26. When MiniGBIC port is used, the RJ-45 port cannot be used.



**CAUTION:** The MiniGBIC ports should use UL listed Optical Transceiver product, Rated Laser Class I. 3.3Vdc.

**Reset:** By pressing the Reset button the Switch will change back to the default configuration and all changes will be lost.

### Rear Panel



Figure 4 – DES-1210-28 Rear Panel

**Power:** The power port is where to connect the AC power cord.

### DES-1210-28P

24-Port 10/100Mbps PoE with 4-Port 10/100/1000Mbps Copper and 2 Combo SFP Web Smart Switch

### Front Panel

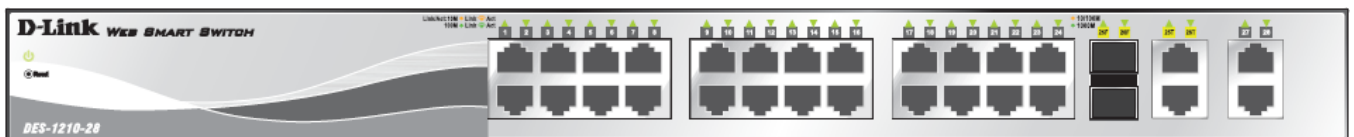


Figure 5 – DES-1210-28P Front Panel

**Power LED** : The Power LED lights up when the Switch is connected to a power source.

**Power Max LED:** The Power Max lights up when the system power resource remain  $\leq 7W$ , in the meantime, system will not provide power to the additional PoE PD inserted.

**Fan OK/Fail LED:** The FAN LED shows the status of the fans, the green light (OK) indicates that all fans work fine and the red light (Fail) indicate that on or multiple fans are working abnormally.

**Mode Select Button/LED:** The Mode Select Button controls the mode of Port LED, and the current setting is indicated by the Mode LED under the button.

#### Port LED (1-24):

**Link/Act/Speed Mode:** When selecting the Link/Act/Speed Mode, the Port LED flashes which indicate a network link through the corresponding port. Blinking indicates that the Switch is either sending or receiving data to the port. When a port has amber light indicates that port is running on 10M. When it has a green light it is running on 100M.

**PoE Mode:** When selecting the PoE Mode, the port LED lights up with solid green indicates power device is connected to corresponding port. Solid amber indicates a PoE error has occurred at this port. And light off indicates this port is not providing the power or no PD found.

**Port LED (25F, 26F, 25T, 26T, 27, 28):** The Port LED flashes which indicates a network link through the corresponding port. Blinking indicates that the Switch is either sending or receiving data to the port. When a port has amber light indicates that port is running on 10M or 100M. When it has a green light it is running on 1000M.



**NOTE:** On DES-1210-28P, the MiniGBIC ports are shared with normal RJ-45 ports 25 and 26. When MiniGBIC port is used, the RJ-45 port cannot be used.



**CAUTION:** The MiniGBIC ports should use UL listed Optical Transceiver product, Rated Laser Class I. 3.3Vdc.

**Reset:** By pressing the Reset button the Switch will change back to the default configuration and all changes will be lost.

### Rear Panel



Figure 6 – DES-1210-28P Rear Panel

**Power:** The power port is where to connect the AC power cord.

### DES-1210-52

48-Port 10/100Mbps Web Smart Switch with 4-Port 10/100/1000Mbps and 2 Combo SFPs

### Front Panel



Figure 7 – DES-1210-52 Front Panel

**Power LED** : The Power LED lights up when the Switch is connected to a power source.

**Port Link/Act/Speed LED (1-48):** The Link/Act/Speed LED flashes which indicates a network link through the corresponding port. Blinking indicates that the Switch is either sending or receiving data to the port. When a port has amber light indicates that port is running on 10M. When it has a green light it is running on 100M.

**Port Link/Act/Speed LED (49F, 50F, 49T, 50T, 51, 52):** The Link/Act/Speed LED flashes which indicates a network link through the corresponding port. Blinking indicates that the Switch is either sending or receiving data to the port. When a port has amber light indicates that port is running on 10M or 100M. When it has a green light it is running on 1000M.

**Reset:** Press the reset button to reset the Switch back to the default settings. All previous changes will be lost.



**NOTE:** On the DES-1210-52, the MiniGBIC ports are shared with normal RJ-45 ports 49 and 50. When the MiniGBIC port is used, the RJ-45 port

cannot be used.



**CAUTION:** The MiniGBIC ports should use UL listed Optical Transceiver product, Rated Laser Class I. 3.3Vdc.

### **Rear Panel**



Figure 8 – DES-1210-52 Rear Panel

**Power:** Connect the supplied AC power cable to this port.

## 2 Hardware Installation

This chapter provides unpacking and installation information for the D-Link Web-Smart Switch.

### Step 1: Unpacking

Open the shipping carton and carefully unpack its contents. Please consult the packing list located in the User Manual to make sure all items are present and undamaged. If any item is missing or damaged, please contact your local D-Link reseller for replacement.

- One D-Link Web-Smart Switch
- One AC power cord
- Four rubber feet
- Screws and two mounting brackets
- One Multi-lingual Getting Started Guide
- One CD with User Manual, SmartConsole Utility program, and D-View Module

If any item is found missing or damaged, please contact the local reseller for replacement.

### Step 2: Switch Installation

For safe switch installation and operation, it is recommended that you:

- Visually inspect the power cord to see that it is secured fully to the AC power connector.
- Make sure that there is proper heat dissipation and adequate ventilation around the switch.
- Do not place heavy objects on the switch.

#### Desktop or Shelf Installation

When installing the switch on a desktop or shelf, the rubber feet included with the device must be attached on the bottom at each corner of the device's base. Allow enough ventilation space between the device and the objects around it.

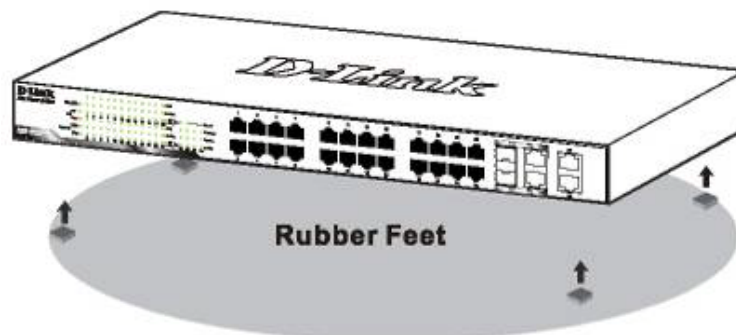


Figure 9 – Attach the adhesive rubber pads to the bottom

#### Rack Installation

The switch can be mounted in an EIA standard size 19-inch rack, which can be placed in a wiring closet with other equipment. To install, attach the mounting brackets to the switch's side panels (one on each side) and secure them with the screws provided (please note that these brackets are not designed for palm size switches).



Figure 10 – Attach the mounting brackets to the Switch



Then, use the screws provided with the equipment rack to mount the switch in the rack.

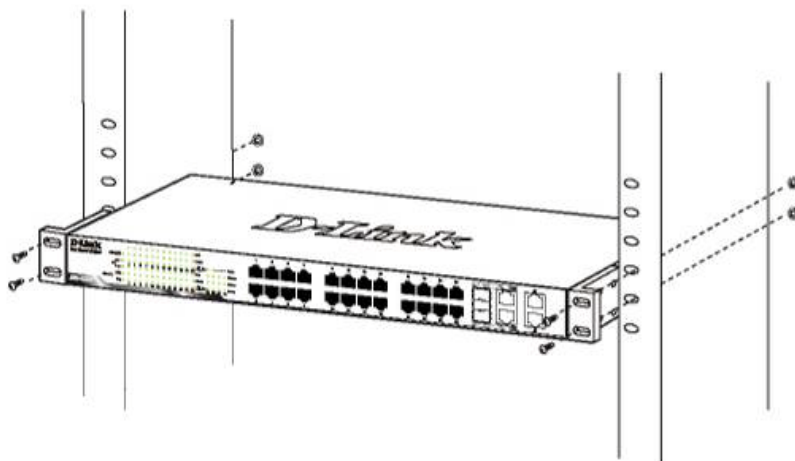


Figure 11 – Mount the Switch in the rack or chassis

Please be aware of following safety Instructions when installing:

- A) Elevated Operating Ambient - If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (Tma) specified by the manufacturer.
- B) Reduced Air Flow - Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.
- C) Mechanical Loading - Mounting of the equipment in the rack should be such that a hazardous condition is not achieved due to uneven mechanical loading.
- D) Circuit Overloading - Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.
- E) Reliable Earthing - Reliable earthing of rack-mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g. use of power strips)."

### ***Step 3 – Plugging in the AC Power Cord***

Users may now connect the AC power cord into the rear of the switch and to an electrical outlet (preferably one that is grounded and surge protected).

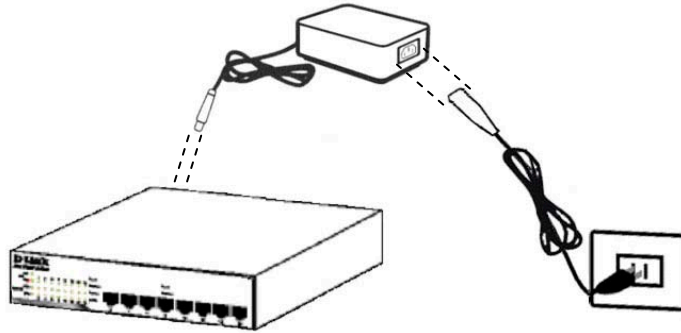


Figure 12 – Plugging the DES-1210-08P into an outlet



**CAUTION:** Do not turn on the power switch of DES-1210-08P before power cables are connected. Power surge may cause damage to the Switch.



**CAUTION:** The installation instructions clearly state that the ITE is to be connected only to PoE networks without routing to the outside plant.

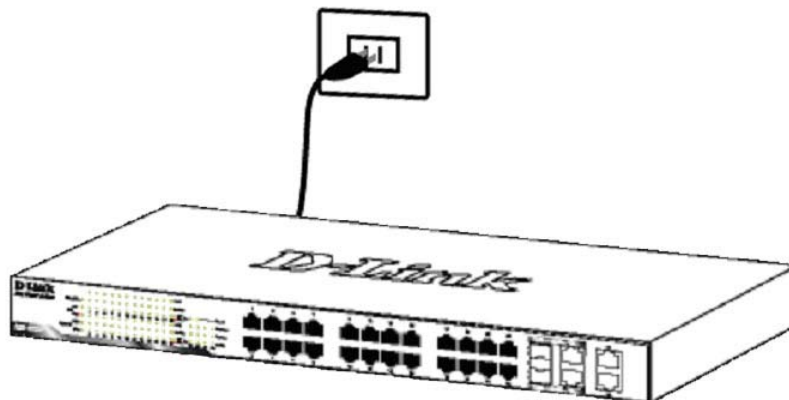


Figure 13 – Plugging DES-1210-28/28P/52 into an outlet

### **Power Failure**

As a precaution, the switch should be unplugged in case of power failure. When power is resumed, plug the switch back in.

## 3 Getting Started

This chapter introduces the management interface of D-Link Web-Smart Switch.

### ***Management Options***

The D-Link Web Smart Switch can be managed through any port on the device by using the Web-based Management or through any PC using the SmartConsole Utility.

Each switch must be assigned its own IP Address, which is used for communication with Web-Based Management or a SNMP network manager. The PC should have an IP address in the same range as the switch. Each switch can allow up to four users to access to the Web-Based Management concurrently.

However, if you want to manage multiple D-Link Web Smart Switches, the SmartConsole Utility is a more convenient choice. By using the SmartConsole Utility, you do not need to change the IP address of your PC and it is easier to initialize multiple Smart Switches.

Please refer to the following installation instructions for the Web-based Management and the SmartConsole Utility.

### ***Using Web-based Management***

After a successful physical installation, you can configure the Switch, monitor the network status, and display statistics using a web browser.

### **Supported Web Browsers**

The embedded Web-based Management currently supports the following web browsers:

- Internet Explorer 6 or higher
- Netscape 8 or higher
- Mozilla
- Firefox 1.5/2.0 or higher

### **Connecting to the Switch**

You will need the following equipment to begin the web configuration of your device:

1. A PC with a RJ-45 Ethernet connection
2. A standard Ethernet cable

Connect the Ethernet cable to any of the ports on the front panel of the switch and to the Ethernet port on the PC.

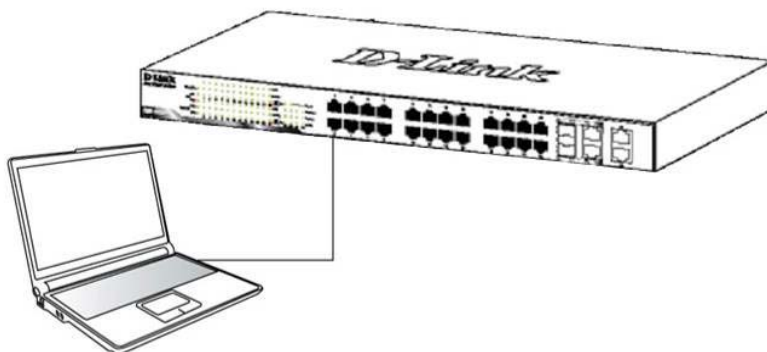


Figure 14 –Connected Ethernet cable

### Login Web-based Management

In order to login and configure the switch via an Ethernet connection, the PC must have an IP address in the same subnet as the switch. For example, if the switch has an IP address of **10.90.90.90**, the PC should have an IP address of **10.x.y.z** (where x/y is a number between 0 ~ 254 and z is a number between 1 ~ 254), and a subnet mask of **255.0.0.0**. There are two ways to launch the Web-based Management, you may either click the Web Access button at the top of the SmartConsole Utility or open the web browser and enter **10.90.90.90** (the factory-default IP address) in the address bar. Then press <Enter>.

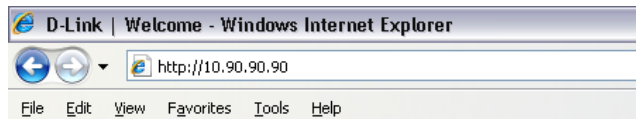


Figure 15 –Enter the IP address 10.90.90.90 in the web browser



**NOTE:** The switch's factory default IP address is 10.90.90.90 with a subnet mask of 255.0.0.0 and a default gateway of 0.0.0.0.

The web configuration can also be accessed through the SmartConsole Utility. Open the SmartConsole Utility and double-click the switch as it appears in the Monitor List. This will automatically load the web configuration in your web browser.

When the following logon dialog box appears, enter the password and choose the language of the Web-based Management interface then click **OK**.

The switch supports 9 languages including English, Traditional Chinese, Simplified Chinese, German, Spanish, French, Italian, Japanese and Russian. By default, the password is **admin** and the language is **English**.



Figure 16 – Logon Dialog Box

### Smart Wizard

After a successful login, the Smart Wizard will guide you through essential settings of the D-Link Web Smart Switch. Please refer to Smart Wizard Configuration section for details.

### Web-based Management

By clicking the **Exit** button in Smart Wizard, you will enter the Web-based Management interface. Please refer to Chapter 5 Configuration for detailed instructions.

### SmartConsole Utility

The SmartConsole Utility included in the installation CD is a program for discovering D-Link Smart Switches within the same L2 network segment connected to your PC. This tool is only for computers running Windows 7, Vista, XP and 200 in both 32 or 64-bit operating systems. There are two options for the installation of the SmartConsole Utility; one is through the autorun program on the installation CD and the other is manual installation.



**NOTE:** Please be sure to uninstall any existing SmartConsole Utility from your PC before installing the latest SmartConsole Utility.

**Option 1:** Follow these steps to install the SmartConsole Utility via the autorun program on the installation CD.

1. Insert the Utility CD into your CD-Rom/DVD-Rom Drive.
2. The autorun program will appear automatically.
3. Click on the "Install SmartConsole Utility" button and an installation wizard will guide you through the process.
4. After successfully installing the SmartConsole Utility, you can open the utility by clicking Start > Programs > D-Link SmartConsole Utility.
5. Connect the Smart Switch to the same L2 network segment of your PC and use the SmartConsole Utility to discover the Smart Switches.

**Option 2:** Follow these steps to install the SmartConsole Utility manually.

1. Insert the Utility CD into your CD-Rom/DVD-Rom Drive.
2. From the Start menu on the Windows desktop, click Computer.
3. Double click on your CD-Rom/DVD-Rom Drive to start the autorun menu, or right click on the Drive to open the folder. Select SmartConsole Utility and double click on the .exe file.
4. Follow the on-screen instructions to install the utility.
5. Upon completion, go to Start > Programs > D-Link SmartConsole Utility and open the SmartConsole Utility.
6. Connect the Smart Switch to the same L2 network segment of your PC and use the SmartConsole Utility to discover the Smart Switches.

For detailed explanations of SmartConsole's functions, please refer to Chapter 4 SmartConsole Utility

## 4 SmartConsole Utility

The D-Link SmartConsole Utility allows the administrator to quickly discover all D-Link smart switches which are in the same domain of the PC, collect traps and log messages, and quick access to basic configurations of the switch.

The SmartConsole Utility consists of three parts, **Device Configurations** at the top, **Device List** as the main body, and **SmartConsole Settings** at the left.

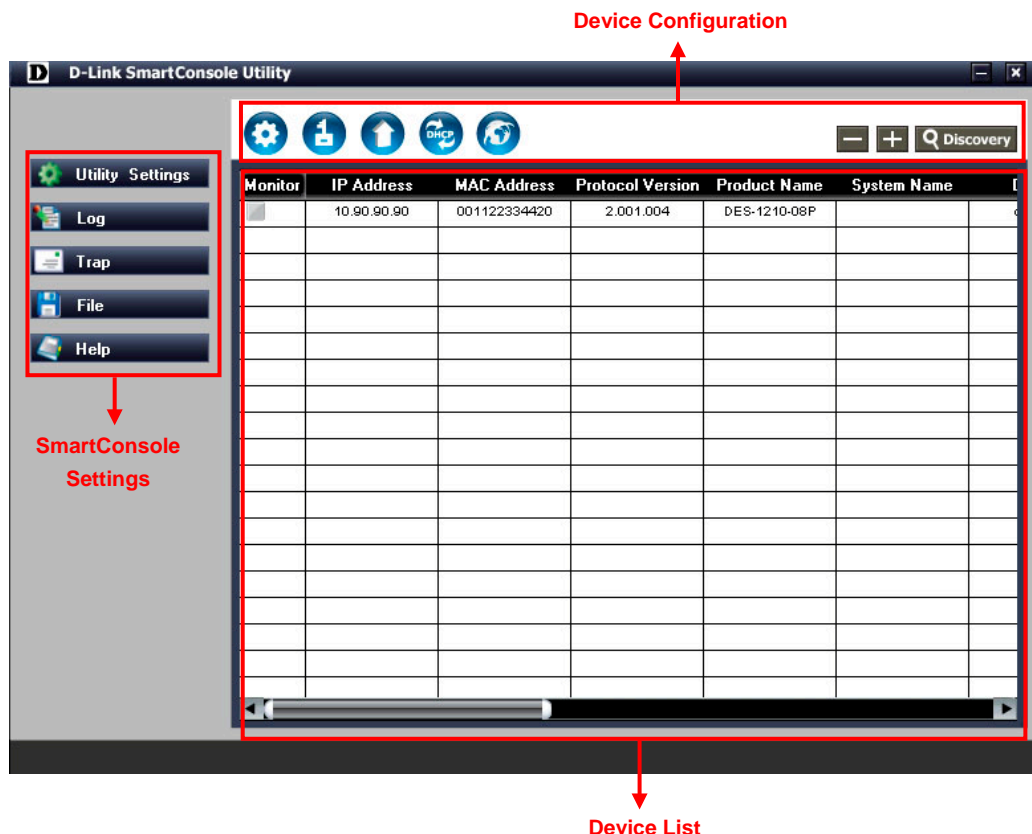


Figure 17 – SmartConsole Utility

### SmartConsole Settings

The SmartConsole Settings at the left has five icons, **Utility Settings**, **Log**, **Trap**, **File**, and **Help**.

#### Utility Settings

Click this icon to launch the Utility Settings window. **Refresh time** refreshes the devices which were selected as monitored device in the Device List. Choices include **15 secs**, **30 secs**, **1mins**, **2mins**, and **5 mins** for selecting the monitoring time intervals. **Utility Group Interval** establishes the intervals (in seconds) that the Switch will be discovered in the SmartConsole Device List.

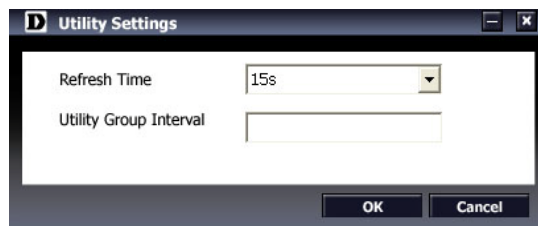


Figure 18 – SmartConsole Utility Settings



**NOTE:** If the Group Interval is set to 0, IGMP Snooping must be disabled in the Switch or the

Web-Smart Switch will not be discovered.

### Log

Click this icon to launch the Log window. Click **View Log** to show the events of the SmartConsole Utility and the device. **Date/Time** indicates when the message was received, **IP** denotes where it comes from and **Status** shows the content of this log message. Click **Clear Log** to clear all log entries. Click **OK** to exit.

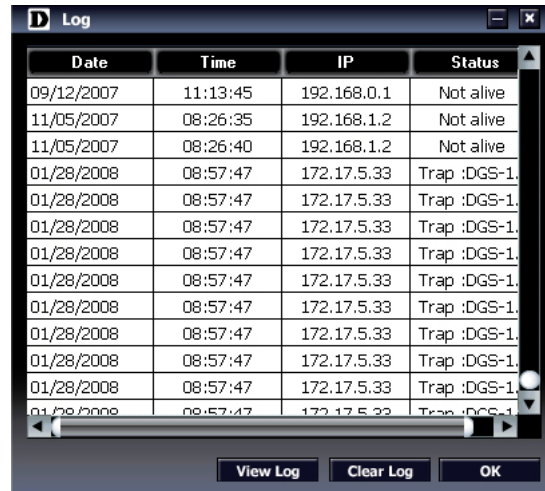


Figure 19 – SmartConsole Log

### Trap

Click this icon to launch the Trap window. Click **View Trap** to show the events of the SmartConsole Utility and the device. **Date/Time** indicates when the trap message was received, **IP** denotes where it comes from and **Status** shows the content of this trap message. Click **Clear Trap** to clear all entries. Click **OK** to exit.

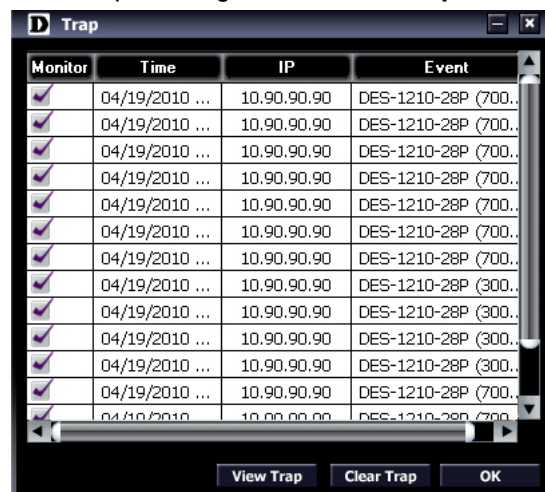




Figure 20 – SmartConsole Trap

The trap icon in the SmartConsole Settings will change while receiving new trap messages. Please see below for detailed description.

Icon	Description
	No new traps
	New traps was received

### File

By clicking on this icon you will see below options:




Figure 21 – SmartConsole File

**Monitor Save:** Records the setting of the Device List as default for the next time the SmartConsole Utility is used.

**Monitor Save As:** Records the setting of the Device List in an appointed filename and file path.

**Monitor Load:** Manually load a Device List setting file.

### Help

Click this icon to launch the SmartConsole Info window.

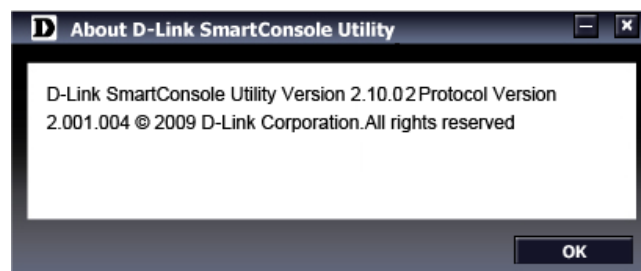


Figure 22 – SmartConsole Help



### ***Device Configuration***

The Device Configuration in the SmartConsole Utility has five icons:



Device Settings



Device Password Manager



Multi Firmware Upgrade



DHCP Refresh



Web Access


and the , ,  device buttons for the Device List.



### **Device Settings**

Select a switch from the Device List. Click on this icon to launch the Device Settings window. Here you can configure the Product Name, IP Address, Gateway, Subnet Mask, System Name, Location, Trap Host IP, Switch Group Interval, and DHCP Client Setting of the Switch.

To apply the configuration, insert the correct device password in the Confirm Password box and then click **OK**

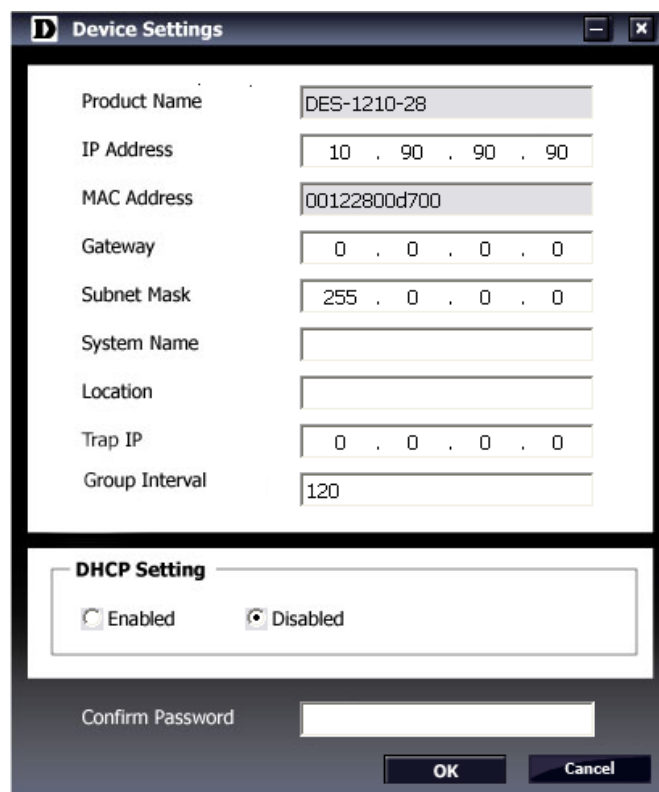

Product Name	DES-1210-28
IP Address	10 . 90 . 90 . 90
MAC Address	00122800d700
Gateway	0 . 0 . 0 . 0
Subnet Mask	255 . 0 . 0 . 0
System Name	
Location	
Trap IP	0 . 0 . 0 . 0
Group Interval	120

**DHCP Setting**  
☐ Enabled ☒ Disabled

Confirm Password:

OK Cancel

Figure 23 – SmartConsole Device Settings



### Device Password Manager

Select a switch from the Device List. Click on this icon to launch the Device Password Manager window. Here you can enter a new password and confirm it.

Figure 24 – SmartConsole Device Password Manager



### Multi Firmware Upgrade

Select one or many switches of same model name from the Device List. Click on this icon to launch the Firmware Upgrade window. Specify the Firmware Path (or Browse for one) that you are going to use. Input the correct password of device, and then click **Upgrade**. The state will show "OK" after completion, and "Fail" is firmware upgrade fails or cannot be completed for any reason.

Index	Product Name	IP Address	MAC Address	Firmware Version	State
1	DES-1210-52	10.90.90.90	001252000...	1.00.005	
2	DES-1210-52	172.21.45.59	00ace84788ff	1.00.005	
3	DES-1210-52	172.21.45.95	001252001...	1.00.005	

Figure 25 – Firmware Upgrade



**CAUTION:** Do not disconnect the PC or remove the power cord from device until upgrade completes. The software may be corrupted because the incomplete firmware upgrade.



### DHCP Refresh:

If a DHCP-client enabled switch in the Device List shows the default IP is still used, it means the device did not receive an IP address from the DHCP server successfully. Select that switch and click the DHCP refresh icon. Enter the correct Device Password and then **click OK**. The device will renew the IP address from the DHCP server.



### Figure 26 – DHCP Refresh




## Web Access

Select a switch from the Device List. Click this icon to launch your internet browser (eg. The Internet Explorer). Here you can configure the Switch through the Web-based Management utility. You may also get into the Web-based Management by double-clicking the device in the device list.


### Add(+), Delete(-) and Discover the device

Click the **Discovery** button to display all the Web-Smart devices located in the same domain with the management PC.

Click the **+** and insert a device IP address to add a device into Discover List, or select a device and click the **–** button to remove it.

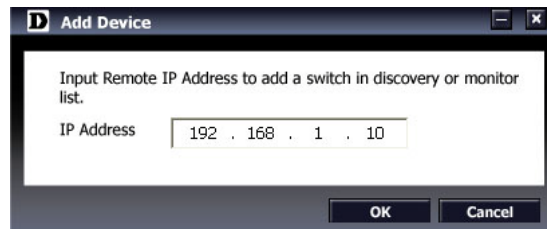

**Figure 27 – SmartConsole Add device**

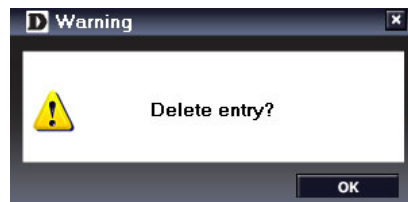

**Figure 28 – SmartConsole Delete device**



### ***Device List***


This list displays all discovered Web-Smart devices on the network.

[illegible]

**Figure 29 – SmartConsole Device List**

Definitions of the Device List features:

**Monitor:** Check the Monitor box and the SmartConsole will collect the trap and log data from the device. The  in the monitor means the device was discovered by SmartConsole. Click the icon to have the device keep updating the information such as system log or trap to the SmartConsole Utility. The icon will become .

When the device was detected as not reachable, the icon will change to . Please check if the power or the cable of this device is disconnected.

**IP Address:** Displays the current IP addresses of devices.

**MAC Address:** Displays the device MAC Addresses.

**Protocol version:** Displays the software version of the Utility.

**Product Name:** Displays the device product name.

**System Name:** Displays the appointed device system name.

**DHCP:** Specify if the device gets the IP address from a DHCP server.

**Location:** Displays where the appointed device location.

**Trap IP:** Displays the IP address of host where the Trap information will be sent to.

**Subnet Mask:** Displays the Subnet Mask setting of the device.

**Gateway:** Displays the Gateway setting of the device.

**Device Group Interval:** Displays the intervals (in seconds) that the Switch will be discovered in the SmartConsole Device List

**Firmware version:** Displays the current Firmware version of this device.

**LLDP:** Displays the LLDP (Link Layer Discovery Protocol) status of the device. (Only for PoE model)

**SNMP:** Displays the SNMP status of the device.



**NOTE:** If the devices marked as red in the device list, it means the devices require to upgrade firmware again.

## 5 Configuration


The features and functions of the D-Link Web Smart Switch can be configured for optimum use through the Web-based Management Utility.

### ***Smart Wizard Configuration***

After a successful login, the Smart Wizard will guide you through essential settings of the D-Link Web Smart Switch. If you do not plan to change anything, click **Exit** to leave the Wizard and enter the Web Interface. You can also skip it by clicking **Don't show Smart Wizard next time** for logon the Web-based Management next time.

#### **Password Settings**

Password setting allows you to change the login password of the device. Type the desired new password in the **Switch Password** box and again in the **Confirm Switch Password**, then click the **Apply** button to make it effective.

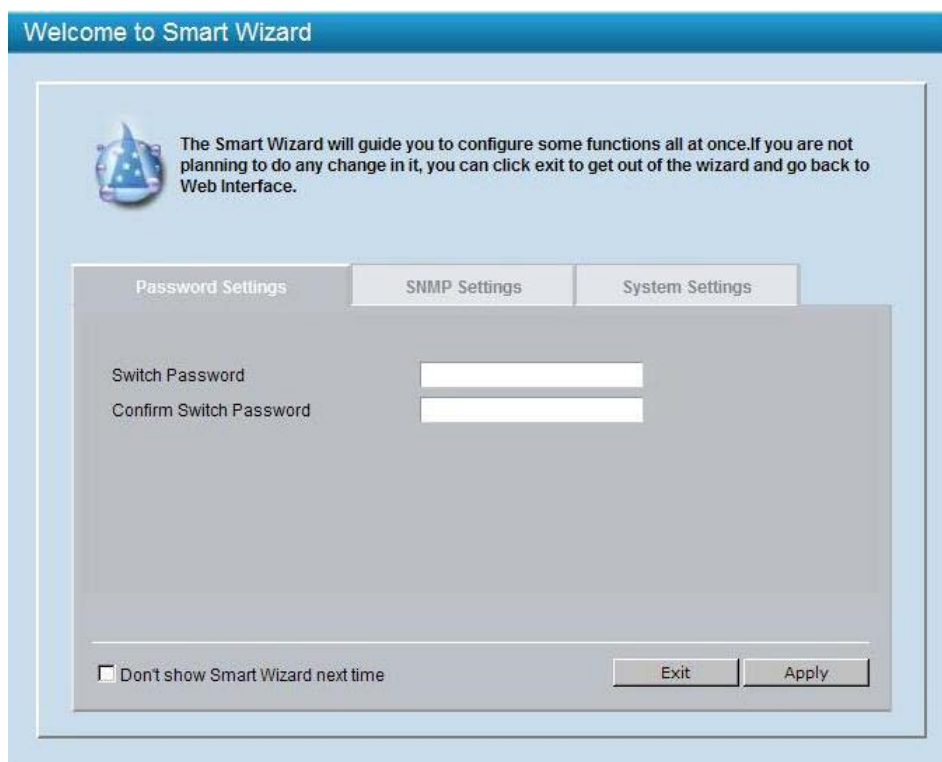

The screenshot shows the 'Welcome to Smart Wizard' window. It features a blue header bar with the title 'Welcome to Smart Wizard'. Below the header, there is a light blue box containing a wizard icon and a message: 'The Smart Wizard will guide you to configure some functions all at once. If you are not planning to do any change in it, you can click exit to get out of the wizard and go back to Web Interface.' Below this message, there are three tabs: 'Password Settings' (selected), 'SNMP Settings', and 'System Settings'. Under the 'Password Settings' tab, there are two text input fields labeled 'Switch Password' and 'Confirm Switch Password'. At the bottom of the window, there is a checkbox labeled 'Don't show Smart Wizard next time' and two buttons: 'Exit' and 'Apply'.

Figure 30 – Configure Password in Smart Wizard

### **SNMP Settings**

The **SNMP Settings** feature allows you to quickly enable or disable the SNMP function and configure the SNMP community name. For the complete SNMP feature, please navigate to **Setup Menu > System > SNMP Settings** in the Web Interface. By default, the SNMP Setting is **Disabled**. Click **Enabled**, enter **Community** names, and then click **Apply** to activate SNMP Setting.

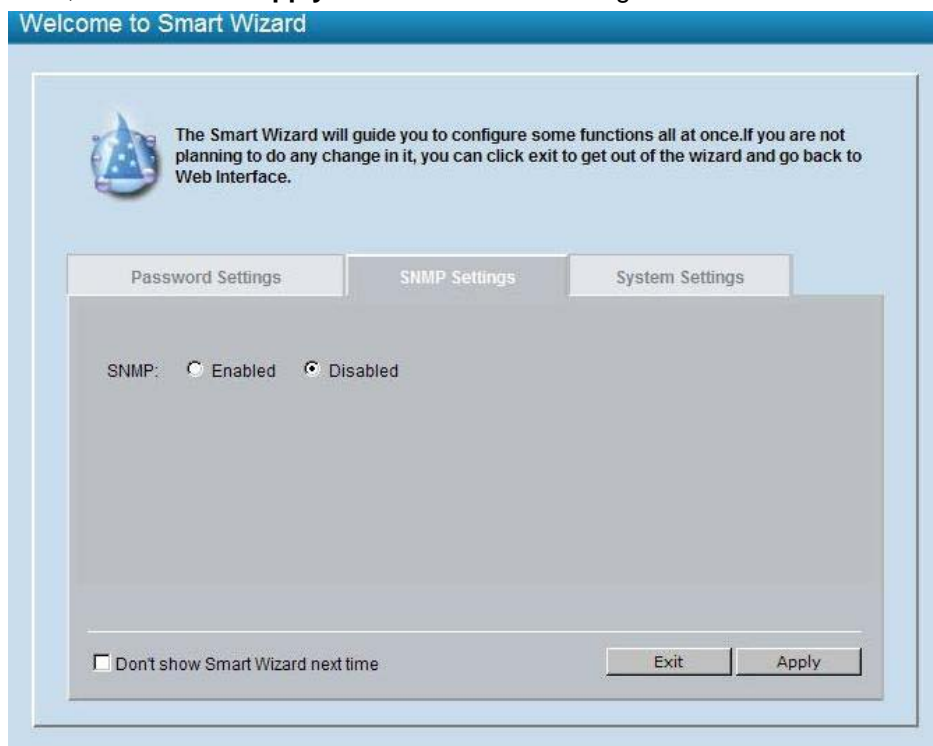


Figure 31 – Configure SNMP in Smart Wizard

### System Settings

You can manually change the system IP Address, Subnet Mask, and Gateway address by selecting **Static** and clicking **Apply**. You can further configure and read more about the above settings in the “Setup Menu > System > System Settings”. The default setting of System IP address is Static. Select **DHCP** to have the switch obtain an IP address from a DHCP server in the network.

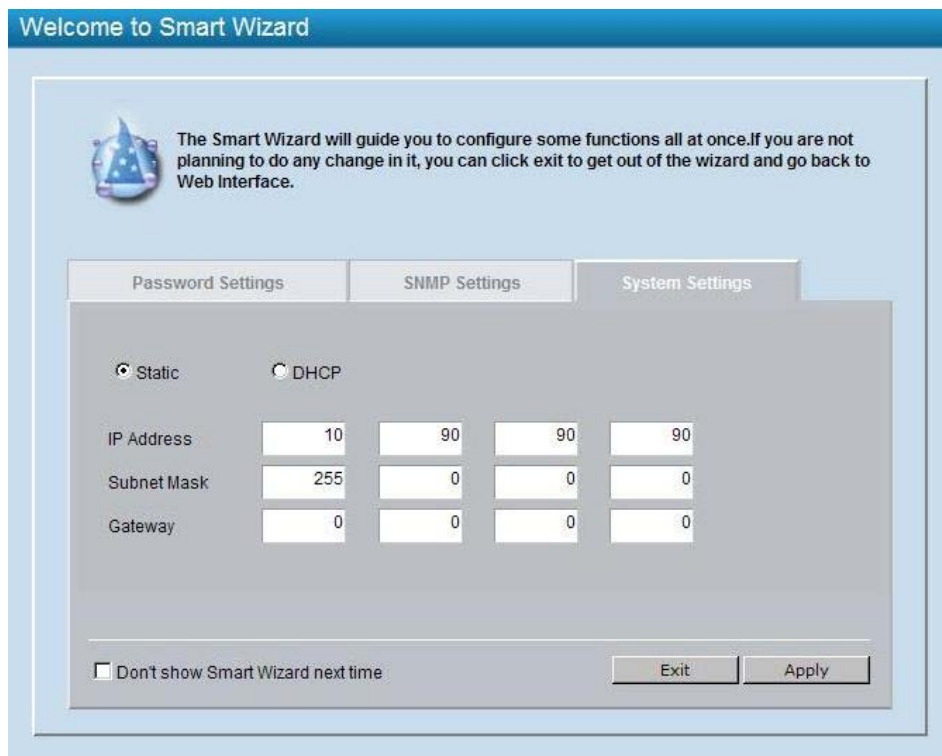


Figure 32 – Configure System IP address in Smart Wizard



**NOTE:** Changing the system IP address will disconnect you from the current connection. Please enter the correct IP address in the Web browser again and make sure your PC is in the same subnet with the switch. See Login Web-based Management for detailed description.

If you want to change the IP settings, click **OK** and start a new web browser.



Figure 33 – Confirm the changes of IP address in Smart Wizard

## Web-based Management

After clicking the **Exit** button in Smart Wizard you will see the screen below:

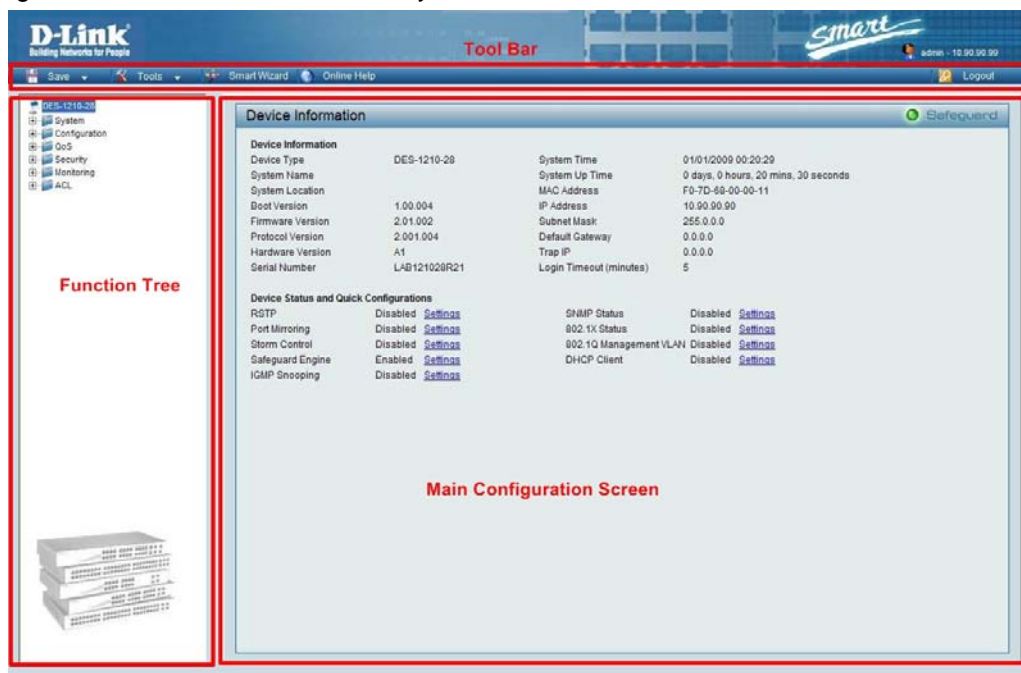


Figure 34 – Web-based Management

Above is the Web-based Management screen. The three main areas are the **Tool Bar** on top, the **Function Tree**, and the **Main Configuration Screen**.

The **Tool Bar** provides a quick and convenient way for essential utility functions like firmware and configuration management.

By choosing different functions in the **Function Tree**, you can change all the settings in the **Main Configuration Screen**. The main configuration screen will show the current status of your Switch by clicking the model name on top of the function tree.

At the upper right corner of the screen the username and current IP address will be displayed.

Under the username is the **Logout** button. Click this to end this session.



**NOTE:** If you close the web browser without clicking the **Logout** button first, then it will be seen as an abnormal exit and the login session will still be occupied.

Finally, by clicking on the D-Link logo at the upper-left corner of the screen you will be redirected to the local D-Link website.



### **Tool Bar > Save Menu**

The Save Menu provides Save Configuration and Save Log functions.




Figure 35 – Save Menu

### **Save Configuration**

Select to save the entire configuration changes you have made to the device to switch's non-volatile RAM.

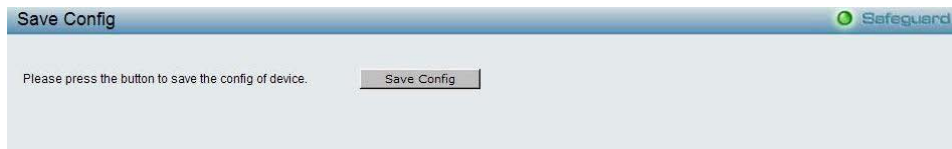


Figure 36 – Save Configuration

### **Save Log**

Save the log entries to your local drive and a pop-up message will prompt you for the file path. You can view or edit the log file by using text editor (e.g. Notepad).

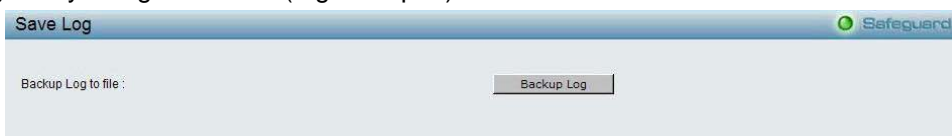


Figure 37 – Save Log

### **Tool Bar > Tool Menu**

The Tool Menu offers global function controls such as Reset, Reset System, Reboot Device, Configuration Backup and Restore, Firmware Backup and Upgrade.

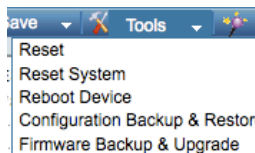


Figure 38 – Tool Menu

### **Reset**

Provide a safe reset option for the Switch. All configuration settings in non-volatile RAM will be reset to factory default except for the IP address.

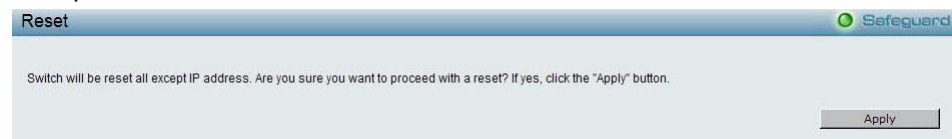


Figure 39 – Tool Menu > Reset

### **Reset System**

Provide another safe reset option for the Switch. All configuration settings in non-volatile RAM will be reset to factory default and then the Switch will reboot.

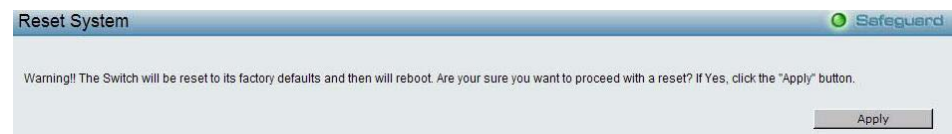


Figure 40 – Tool Menu > Reset System

### **Reboot Device**

Provide a safe way to reboot the system. Click **Reboot** to restart the switch.



Figure 41 – Tool Menu &gt; Reboot Device

### Configuration Backup & Restore

Allow the current configuration settings to be saved to a file (not including the password), and if necessary, you can restore configuration settings from the file. Two methods can be selected: **HTTP** or **TFTP**.

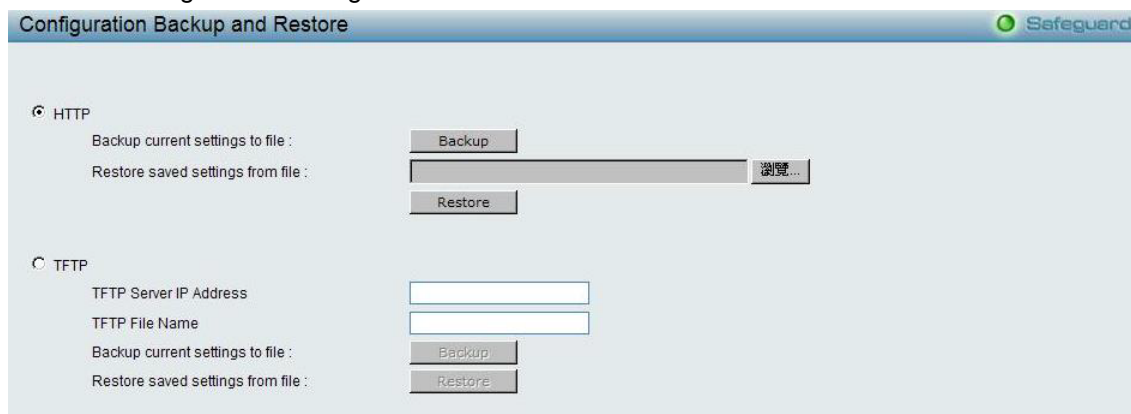


Figure 42 – Tool Menu &gt; Configure Backup and Restore

**HTTP:** Backup or restore the configuration file to or from your local drive.

Click **Backup** to save the current settings to your disk.

Click **Browse** to browse your inventories for a saved backup settings file.

Click **Restore** after selecting the backup settings file you want to restore.

**TFTP:** TFTP (Trivial File Transfer Protocol) is a file transfer protocol that allows you to transfer files to a remote TFTP server. Specify **TFTP Server IP Address** and **File Name** for the configuration file you want to save to / restore from.

Click **Backup** to save the current settings to the TFTP server.

Click **Restore** after selecting the backup settings file you want to restore.



**Note:** Switch will reboot after restore and all current configurations will be lost

### Firmware Backup and Upload

Allow for the firmware to be saved, or for an existing firmware file to be uploaded to the Switch. Two methods can be selected: **HTTP** or **TFTP**.

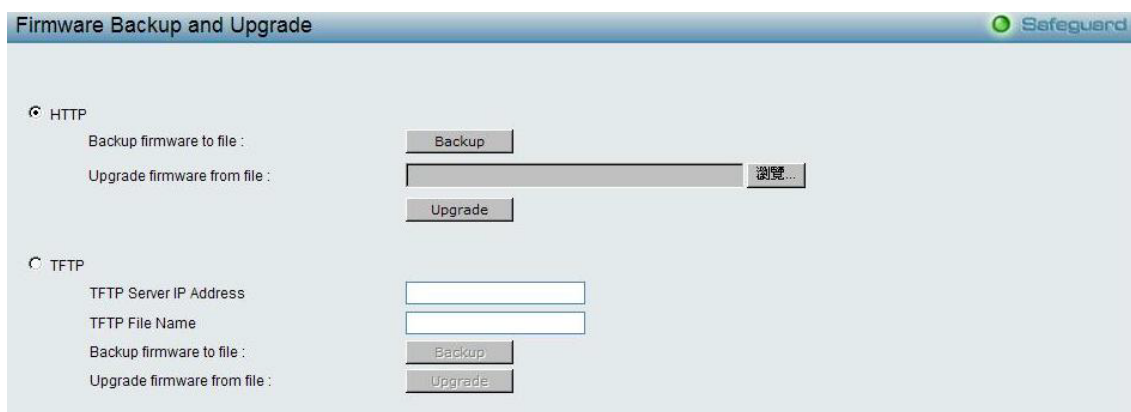


Figure 43 – Tool Menu &gt; Firmware Backup and Upload

**HTTP:** Backup or upgrade the firmware to or from your local drive of PC.

Click **Backup** to save the firmware to your disk.

Click **Browse** to browse your inventories for a saved firmware file.

Click **Upgrade** after selecting the firmware file you want to restore.

**TFTP:** Backup or upgrade the firmware to or from a remote TFTP server. Specify **TFTP Server IP Address** and **File Name** for the configuration file you want to save to / restore from.

Click **Backup** to save the firmware to the TFTP server.

Click **Upgrade** after selecting the firmware file you want to restore.



**CAUTION:** Do not disconnect the PC or remove the power cord from device until upgrade complete. Switch may crash if Firmware upgrade incompletely.

### ***Tool Bar > Smart Wizard***

By clicking the Smart Wizard button, you can return to the Smart Wizard if you wish to make any changes there.

### ***Tool Bar > Online Help***

The Online Help provides two ways of online support: **Online Support Site** will lead you to the D-Link website where you can find online resources such as updated firmware images; **User Guide** can offer an immediate reference for the feature definition or configuration guide. Click **Apply** to access the online resources selected.



**Figure 44 – Online Help**

Online Help
Safeguard

☐ Online Support Site  
Please click "Apply" to go to the D-Link online support site.

☒ User Guide  
Please click "Apply" to open a window and display the user guide.



**WEB SMART SWITCH**  
**Web Smart Switch User Manual**  
DES-1210 Series

**About This Guide**  
Terms/Usage  
Copy Right and Trademarks

**Product Introduction**  
DES-1210-28  
Front Panel  
Rear Panel  
DES-1210-02  
Front Panel  
Rear Panel  
DES-1210-28P  
Front Panel  
Rear Panel

**Hardware Installation**  
Step1: Unpacking  
Step2: Switch Installation  
Desktop or Shelf Installation  
Rack Installation  
Step 3 – Plugging in the AC Power Cord  
Power Failure

**Getting Started**  
Management Options  
Using Web-based Management  
Supported Web Browsers  
Connecting to the Switch  
Login Web-based Management  
Smart Wizard  
Web-based Management  
SmartConsole Utility

**SmartConsole Utility**  
SmartConsole Settings  
Utility Settings  
Log  
Trap  
File  
Help  
Device Configurations  
Add(+), Delete(-) and Discover the device  
Device List

**Command Line Interface**  
To connect a switch via TELNET:  
Logging on to the Command Line Interface:  
CLI Commands:  
Download  
Upload  
Config ipif System  
Logout  
Ping  
Reboot  
Reset  
Show ipif  
Show switch  
Config account admin password  
Save

**Configuration**  
Smart Wizard Configuration  
Password Settings  
SNMP Settings  
System Settings  
Web-based Management  
Tool Bar > Save Menu  
Save Configuration  
Save Log  
Tool Bar > Tool Menu  
Reset  
Reset System  
Reboot Device  
Configuration Backup & Restore  
Firmware Backup and Upload  
Tool Bar > Smart Wizard  
Function Tree  
Device Information  
System > System Settings  
System > DHCP Auto Configuration  
System > Trap Settings For SmartConsole  
System > Port Settings  
System > SNMP Settings > SNMP Global State  
System > SNMP Settings > SNMP User Table  
System > SNMP Settings > SNMP Group Table State  
System > SNMP Settings > SNMP View Table  
System > SNMP Settings > SNMP Community Table  
System > SNMP Settings > SNMP Host Table  
System > SNMP Settings > SNMP Engine ID  
System > SNMP Settings > SNMP Trap Settings  
System > Password Access Control  
System > System Log Settings  
Configuration > 802.1Q VLAN  
Configuration > Asymmetric VLAN  
Configuration > 802.1Q Management VLAN  
Configuration > Voice VLAN > Voice VLAN Setting  
Configuration > Voice VLAN > Voice VLAN OUI Setting  
Configuration > Link Aggregation > Port Trunking  
Configuration > Link Aggregation > LACP Port Settings  
Configuration > IGMP Snooping  
Configuration > Port Mirroring  
Configuration > Loopback Detection  
Configuration > STP Settings > Time Settings  
Configuration > STP Settings > TimeZone Settings  
Configuration > Spanning Tree > STP Global Settings  
Configuration > Spanning Tree > STP Port Settings  
QoS > Storm Control  
QoS > 802.1p/DSCP Priority Settings  
Security > Trusted Host  
Security > Safeguard Engine  
Security > ARP Spoofing Prevention  
Security > Port Security  
SSL Settings  
Security > 802.1X > 802.1X Settings  
Security > MAC Address Table > Static MAC  
Security > MAC Address Table > Dynamic Forwarding Table  
Security > DHCP Server Screening > DHCP Server Screening Port Setting  
Monitoring > Statistics  
Monitoring > Cable Diagnostics  
Monitoring > System Log  
ACL > ACL Configuration Wizard  
ACL > ACL Profile List  
ACL > ACL Finder  
PoE > PoE Port Settings (Only for DES-1210-28P)  
PoE > PoE System Settings (Only for DES-1210-28P)  
Time-Based PoE > Time Range Settings (Only for DES-1210-28P)  
LLDP > LLDP Global Settings (Only for DES-1210-28P)  
LLDP > LLDP Remote Port Information (Only for DES-1210-28P)  
LLDP > LLDP-MED Settings (Only for DES-1210-28P)

**Appendix A – Ethernet Technology**  
Gigabit Ethernet Technology  
Fast Ethernet Technology  
Switching Technology

**Appendix B – Technical Specifications**  
Hardware Specifications  
Key Components / Performance  
Port Functions  
Physical & Environment  
Emission (EMI) Certifications  
Safety Certifications  
Features  
L2 Features  
VLAN  
QoS (Quality of Service)  
Security  
Management

**Appendix C – Rack mount Instructions**



Version 2.0

Phone:886-2-6600-0123 Address: NO.289, Sinhu 3rd Rd., Nelu District, Taipei City 114, Taiwan, R.O.C.  
 © 2010 D-Link Corporation. All rights reserved.

Figure 45 – User Guide Micro Site

## Function Tree

All configuration options on the switch are accessed through the Setup menu on the left side of the screen. Click on the setup item that you want to configure. The following sections provide more detailed description of each feature and function.

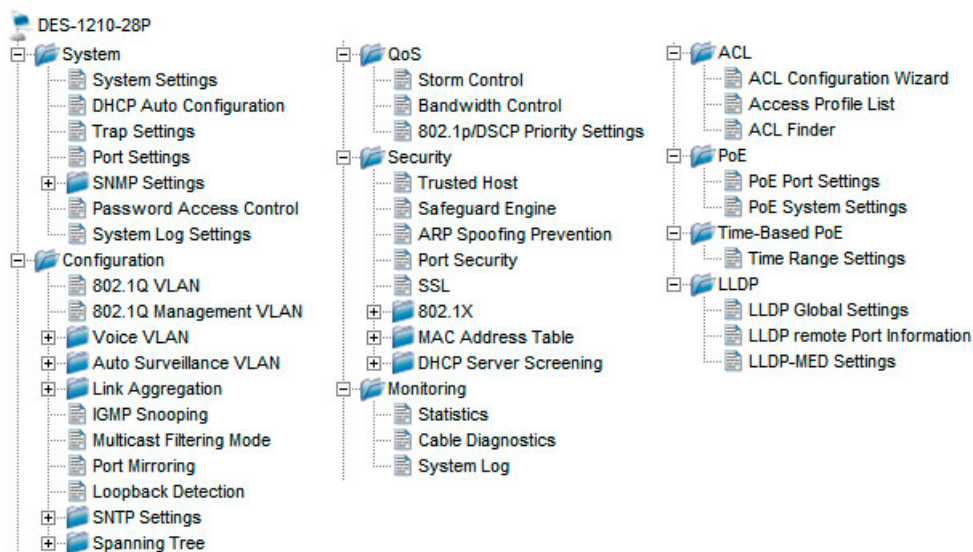


Figure 46 –Function Tree

## Device Information

The Device Information provides an overview of the switch, includes essential information such as firmware & hardware information, and IP address.

It also offers an overall status of common software features:

**RSTP:** Click **Setting** to link to Configuration > Spanning Tree > STP Global Settings. Default is disabled.

**Port Mirroring:** Click **Setting** to link to Configuration > Port Mirroring. Default is disabled.

**Storm Control:** Click **Setting** to link to Configuration > QoS > Storm Control. Default is disabled.

**Safeguard Engine:** Click **Setting** to link to Configuration > Security > Safeguard Engine. Default is enabled.

**IGMP Snooping:** Click **Setting** to link to Configuration > IGMP Snooping. Default is disabled.

**SNMP:** Click **Setting** to link to System > SNMP Setting. Default is disabled.

**802.1X:** Click **Setting** to link to Configuration > Security > 802.1X > 802.1X Settings. Default is disabled.

**802.1Q Management VLAN:** Click **Setting** to link to Configuration > 802.1Q Management VLAN. Default is disabled.

**DHCP Client:** Click **Setting** to link to System > System Setting. Default is disabled.

Device Information			
<div> <div>Device Information</div> <div> <div> <div>Device Type</div> <div>DES-1210-28</div> </div> <div> <div>System Time</div> <div>01/01/2009 00:20:29</div> </div> </div> <div> <div>System Name</div> <div></div> </div> <div> <div>System Location</div> <div></div> </div> <div> <div>Boot Version</div> <div>1.00.004</div> </div> <div> <div>Firmware Version</div> <div>2.01.002</div> </div> <div> <div>Protocol Version</div> <div>2.001.004</div> </div> <div> <div>Hardware Version</div> <div>A1</div> </div> <div> <div>Serial Number</div> <div>LAB121028R21</div> </div> <div> <div>System Up Time</div> <div>0 days, 0 hours, 20 mins, 30 seconds</div> </div> <div> <div>MAC Address</div> <div>F0-7D-68-00-00-11</div> </div> <div> <div>IP Address</div> <div>10.90.90.90</div> </div> <div> <div>Subnet Mask</div> <div>255.0.0.0</div> </div> <div> <div>Default Gateway</div> <div>0.0.0.0</div> </div> <div> <div>Trap IP</div> <div>0.0.0.0</div> </div> <div> <div>Login Timeout (minutes)</div> <div>5</div> </div> </div>			
<div> <div>Device Status and Quick Configurations</div> <div> <div> <div>RSTP</div> <div>Disabled</div> <div><a href="#">Settings</a></div> </div> <div> <div>Port Mirroring</div> <div>Disabled</div> <div><a href="#">Settings</a></div> </div> <div> <div>Storm Control</div> <div>Disabled</div> <div><a href="#">Settings</a></div> </div> <div> <div>Safeguard Engine</div> <div>Enabled</div> <div><a href="#">Settings</a></div> </div> <div> <div>IGMP Snooping</div> <div>Disabled</div> <div><a href="#">Settings</a></div> </div> <div> <div>SNMP Status</div> <div>Disabled</div> <div><a href="#">Settings</a></div> </div> <div> <div>802.1X Status</div> <div>Disabled</div> <div><a href="#">Settings</a></div> </div> <div> <div>802.1Q Management VLAN</div> <div>Disabled</div> <div><a href="#">Settings</a></div> </div> <div> <div>DHCP Client</div> <div>Disabled</div> <div><a href="#">Settings</a></div> </div> </div> </div>			

Figure 47 – Device Information



### **System > System Settings**

The System Setting allows the user to configure the IP address and the basic system information of the Switch.

**IP Information:** There are two ways for the switch to obtain an IP address: Static and DHCP (Dynamic Host Configuration Protocol).

When using static mode, the **IP Address**, **Subnet Mask** and **Gateway** can be manually configured. When using DHCP mode, the Switch will first look for a DHCP server to provide it with an IP address (including network mask and default gateway) before using the default or previously entered settings. By default the IP setting is static mode with IP address is **10.90.90.90** and subnet mask is **255.0.0.0**.

**System Information:** By entering a **System Name** and **System Location**, the device can more easily be recognized through the SmartConsole Utility and from other Web-Smart devices on the LAN.

**Login Timeout:** The Login Timeout controls the idle time-out period for security purposes, when there is no action for a specific time span in the Web-based Management. If the current session times out (expires), the user is required a re-login before using the Web-based Management again. Selective range is from 3 to 30 minutes, and the default setting is 5 minutes.

**Group Interval:** The D-Link Web Smart Switch will routinely send report packets to the SmartConsole Utility in order to maintain the information integrity. The user can adjust the **Group Interval** to optimal frequency. Selective range is from 120 to 1225 seconds, and 0 means disabling the reporting function.

Figure 48 – System > System Setting

### **System > DHCP Auto Configuration**

This page allows you to enable the DHCP Auto Configuration feature on the Switch. When enabled, the Switch becomes a DHCP client and gets the configuration file from a TFTP server automatically on next boot up. To accomplish this, the DHCP server must deliver the TFTP server IP address and configuration file name information in the DHCP reply packet. The TFTP server must be up and running and store the necessary configuration file in its base directory when the request is received from the Switch.

Figure 49 – System > DHCP Auto Configuration

### **System > Trap Settings (For SmartConsole)**

By configuring the Trap Setting, it allows SmartConsole Utility to monitor specified events on this Web-Smart Switch. By default, Trap Setting is disabled. When the Trap Setting is enabled, enter the **Destination IP** address of the managing station that will receive trap information.

**Figure 50 – System > Trap Setting**

You can select which event message(s) to be sent to the managing station

**System Event:** The system level messages, which contains:

**Device Bootup** - System boot-up information.

**Illegal Login** - Events of incorrect password logins, recording the IP of the originating PC.

**Fiber Port Link Up/Link Down:** Fiber port connection information.

**Twisted pair Port Link Up/Link Down:** Copper port connection information.

**RSTP Port State Change:** Events of a RSTP port state changes.

**Firmware Upgrade State:** Information of firmware upgrade - success or failure.

**PoE Power On/Off:** Status of power per port (Only for DES-1210-08P and 28P)

**PoE Power Error:** The four trap events are: power over loading, short circuit, thermal shutdown and power deny (Only for DES-1210-08P and 28P).



**NOTE:** The total PoE power budget is 72 watts for DES-1210-08P and 193 watts for DES-1210-28P. The remaining 7watts is reserved for the last PoE device to be connected to the switch. The Power Deny trap message is sent out when the switch hits the total power budget and when a new Power Device (PD) requests to connect to the switch at the same time.

**Over Max Power Budget:** When the system supplies power to PDs and hits the max PoE power budget of 193watts, the system will send out this trap message. (Only for DES-1210-08P and 28P)

### **System > Port Settings**

In the Port Setting page, the status of all ports can be monitored and adjusted for optimum configuration. By selecting a range of ports (**From Port** and **To Port**), the **Speed** can be set for all selected ports, effective by clicking **Apply**. Press the **Refresh** button to view the latest information.

**Port Settings** Safeguard

From Port:  To Port:  Speed:  MDI/MDIX:  Flow Control:

Port	Link Status	Speed	MDI/MDIX	Flow Control
1	Down	Auto	AUTO	Disabled
2	Down	Auto	AUTO	Disabled
3	Down	Auto	AUTO	Disabled
4	Down	Auto	AUTO	Disabled
5	Down	Auto	AUTO	Disabled
6	Down	Auto	AUTO	Disabled
7	Down	Auto	AUTO	Disabled
8	Down	Auto	AUTO	Disabled
9	Down	Auto	AUTO	Disabled
10	Down	Auto	AUTO	Disabled
11	Down	Auto	AUTO	Disabled
12	Down	Auto	AUTO	Disabled
13	100M Full	Auto	AUTO	Disabled
14	Down	Auto	AUTO	Disabled
15	Down	Auto	AUTO	Disabled
16	Down	Auto	AUTO	Disabled
17	Down	Auto	AUTO	Disabled
18	Down	Auto	AUTO	Disabled
19	Down	Auto	AUTO	Disabled
20	Down	Auto	AUTO	Disabled
21	Down	Auto	AUTO	Disabled
22	Down	Auto	AUTO	Disabled
23	Down	Auto	AUTO	Disabled
24	Down	Auto	AUTO	Disabled
25	Down	Auto	AUTO	Disabled
26	Down	Auto	AUTO	Disabled
27	Down	Auto	AUTO	Disabled
28	Down	Auto	AUTO	Disabled

Figure 51 – System &gt; Port Setting

**Speed:** Gigabit Fiber connections can operate in 1000M Full Force Mode, Auto Mode or Disabled. Copper connections can operate in Forced Mode settings (1000M Full, 100M Full, 100M Half, 10M Full, 10M Half), Auto, or Disabled. 100M Fiber connections support 100M Full Force Mode, 100M Half Force Mode, or Disabled. The default setting for all ports is **Auto**.



**NOTE:** Be sure to adjust port speed settings appropriately after changing connected cable media types.

#### MDI/MDIX:

A **medium dependent interface (MDI)** port is an Ethernet port connection typically used on the Network Interface Card (NIC) or Integrated NIC port on a PC. Switches and hubs usually use **Medium dependent interface crossover (MDIX)** interface. When connecting the Switch to end stations, user have to use straight through Ethernet cables to make sure the Tx/Rx pairs match up properly. When connecting the Switch to other networking devices, a crossover cable must be used.

This switch provides configurable **MDI/MDIX** function for users. The switches can set as an MDI port in order to connect to other hubs or switches without an Ethernet crossover cable.

**Auto MDI/MDIX** is designed on the switch to detect if the connection is backwards and automatically chooses MDI or MDIX to properly match the connection. The default setting is “**Auto**” MDI/MDIX.

**Flow Control:** You can enable this function to mitigate the traffic congestion. Ports configured for full-duplex use 802.3x flow control, half-duplex ports use backpressure flow control. The default setting is Disabled.

**Link Status:** Reporting **Down** indicates the port is disconnected.


#### System > SNMP Settings > SNMP Global State

Simple Network Management Protocol (SNMP) is an OSI Layer 7 (Application Layer) protocol designed specifically for managing and monitoring network devices. SNMP enables network management stations to read and modify the settings of gateways, routers, switches, and other network devices. Use SNMP to configure system features for proper operation, monitor performance and detect potential problems in the Switch or LAN.



Managed devices that support SNMP include software (referred to as an agent), which runs locally on the device. A defined set of variables (managed objects) is maintained by the SNMP agent and used to manage the device. These objects are defined in a Management Information Base (MIB), which provides a standard presentation of the information controlled by the on-board SNMP agent. SNMP defines both the format of the MIB specifications and the protocol used to access this information over the network.

The default SNMP global state is disabled. Select Enable and click **Apply** to enable the SNMP function.

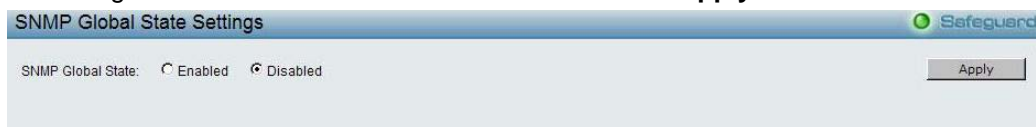

The screenshot shows the 'SNMP Global State Settings' window. It has a title bar with 'Safeguard' on the right. Below the title bar, there is a section 'SNMP Global State:' with two radio buttons: 'Enabled' (selected) and 'Disabled'. To the right of these buttons is an 'Apply' button.

Figure 52 – System > SNMP Settings > SNMP Global State Settings

### **System > SNMP Settings > SNMP User Table**

This page is used to maintain the SNMP user table for the use of SNMPv3. SNMPv3 allows or restricts users using the MIB OID, and also encrypts the SNMP messages sent out between users and Switch.


**User Name:** Enter a SNMP user name of up to 32 characters.

**Group Name:** Specify the SNMP group of the SNMP user.

**SNMP Version:** Specify the SNMP version of the user. Only SNMPv3 encrypts the messages.

**Auth-Protocol/Password:** Specify either HMAC-MD5-96 or HMAC-SHA to be the authentication protocol. Enter a password for SNMPv3 encryption in the right column.

**Priv-Protocol/Password:** Specify either **no authorization** or **DES 56-bit encryption** and then enter a password for SNMPv3 encryption in the right column.

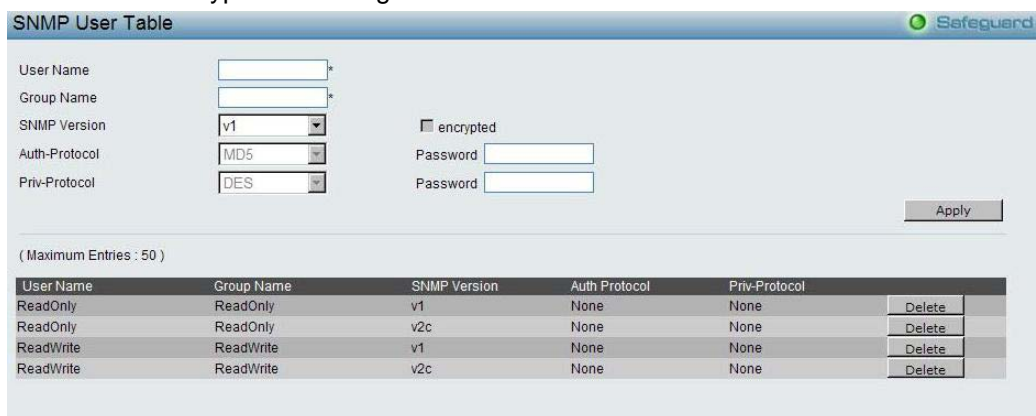

The screenshot shows the 'SNMP User Table' configuration page. It has a title bar with 'Safeguard' on the right. Below the title bar, there are input fields for 'User Name' and 'Group Name', both with asterisks indicating required fields. Below these are dropdown menus for 'SNMP Version' (set to 'v1'), 'Auth-Protocol' (set to 'MD5'), and 'Priv-Protocol' (set to 'DES'). To the right of these dropdowns is a checkbox labeled 'encrypted'. Below the checkbox are two 'Password' input fields. An 'Apply' button is located to the right of the password fields. Below the configuration fields, there is a table with the following data:

User Name	Group Name	SNMP Version	Auth Protocol	Priv-Protocol	
ReadOnly	ReadOnly	v1	None	None	Delete
ReadOnly	ReadOnly	v2c	None	None	Delete
ReadWrite	ReadWrite	v1	None	None	Delete
ReadWrite	ReadWrite	v2c	None	None	Delete

Below the table, there is a note: '( Maximum Entries : 50 )'.

Figure 53 – System > SNMP Settings > SNMP User Table

Click **Apply** to create a new SNMP user account, and click **Delete** to remove any existing data.

### **System > SNMP Settings > SNMP Group Table State**

This page is used to maintain the SNMP Group Table associating to the users in SNMP User Table. SNMPv3 can control MIB access policy, security policy for a user group directly.

**Group Name:** Specify the SNMP user group of up to 32 characters.

**Read View Name:** Specify a SNMP group name for users that are allowed SNMP read privileges to the Switch's SNMP agent.

**Write View Name:** Specify a SNMP group name for users that are allowed SNMP write privileges to the Switch's SNMP agent.

**Security Model:** Select the SNMP security model.

**SNMPv1** - SNMPv1 does not support the security features.

**SNMPv2** - SNMPv2 supports both centralized and distributed network management strategies. It includes improvements in the Structure of Management Information (SMI) and adds some security features.

**SNMPv3** - SNMPv3 provides secure access to devices through a combination of authentication and encrypting packets over the network.

**Security Level:** This function is only available when you select SNMPv3 security level.

**NoAuthNoPriv** - No authorization and no encryption for packets sent between the Switch and SNMP manager.

**AuthNoPriv** - Authorization is required, but no encryption for packets sent between the Switch and SNMP manager.

**AuthPriv** - Both authorization and encryption are required for packets sent between the Switch and SNMP manager.

**Notify View Name:** Specify a SNMP group name for users that can receive SNMP trap messages generated by the Switch's SNMP agent.



The screenshot shows the 'SNMP Group Table' configuration window. It includes input fields for Group Name, Read View Name, Write View Name, Security Model (set to v1), Security Level (set to NoAuthNoPriv), and Notify View Name. An 'Apply' button is present. Below the fields is a table with columns: Group Name, Read View, Write View, Notify View, Security Model, Security Level, and a Delete button. The table contains four entries.

Group Name	Read View	Write View	Notify View	Security Model	Security Level	
ReadOnly	ReadWrite	---	ReadWrite	v1	NoAuthNoPriv	Delete
ReadOnly	ReadWrite	---	ReadWrite	v2c	NoAuthNoPriv	Delete
ReadWrite	ReadWrite	ReadWrite	ReadWrite	v1	NoAuthNoPriv	Delete
ReadWrite	ReadWrite	ReadWrite	ReadWrite	v2c	NoAuthNoPriv	Delete

Figure 54 – System > SNMP Settings > SNMP Group Table

### System > SNMP Settings > SNMP View Table

This page allows you to maintain SNMP views to community strings that define the MIB objects which can be accessed by a remote SNMP manager.



The screenshot shows the 'SNMP View Table Configuration' window. It includes input fields for View Name, Subtree OID, and OID Mask, each with an asterisk indicating it is required. There is also a View Type dropdown menu set to 'Included'. An 'Apply' button is present. Below the fields is a table with columns: View Name, Subtree OID, OID Mask, View Type, and a Delete button. The table contains one entry.

View Name	Subtree OID	OID Mask	View Type	
ReadWrite	1	1	Included	Delete

Figure 55 – System > SNMP Settings > SNMP View Table

**View Name:** Name of the view, up to 32 characters.

**Subtree OID:** The Object Identifier (OID) Subtree for the view. The OID identifies an object tree (MIB tree) that will be included or excluded from access by an SNMP manager.

**OID Mask:** The mask of the Subtree OID. 1 means this object number is concerned, 0 means do not concerned. For example 1.3.6.1.2.1.1 with mask 1.1.1.1.1.0 means 1.3.6.1.2.1.X.

**View Type:** Specify the configured OID is Included or Excluded that a SNMP manager can access.

Click **Apply** to create a new view, **Delete** to remove an existing view.

### System > SNMP Settings > SNMP Community Table

This page is used to maintain the SNMP community string of the. SNMP managers using the same community string are permitted to gain access to the Switch's SNMP agent.

**Community Name:** Name of the community string

**User Name (View Policy):** Specify the read/write or read-only level permission for the MIB objects accessible to the SNMP community.



SNMP Community Table Configuration

Community Name

User Name (View Policy)

( Maximum Entries : 10 )

Community Name	User Name	
public	ReadOnly	<input type="button" value="Delete"/>
private	ReadWrite	<input type="button" value="Delete"/>

Figure 56 – System &gt; SNMP Settings &gt; SNMP Community Table

Click **Apply** to create a new SNMP community, **Delete** to remove an existing community.

### System > SNMP Settings > SNMP Host Table

This page is to configure the SNMP trap recipients.

**Host IP Address:** Specify the IP address of SNMP management host.

**SNMP Version:** Specify the SNMP version to be used to the management host.

**Community String/SNMPv3 User Name:** Specify the community string or SNMPv3 user name for the management host.



SNMP Host Table

Host IP Address

SNMP Version

Community String/SNMPv3 User Name

( Maximum Entries : 10 )

Host IP Address	SNMP Version	Community Name/SNMPv3 User Name
-----------------	--------------	---------------------------------

Figure 57 – System &gt; SNMP Settings &gt; SNMP Host Table

Click **Apply** to create a new SNMP host, **Delete** to remove an existing host.

### System > SNMP Settings > SNMP Engine ID

The Engine ID is a unique identifier used to identify the SNMPv3 engine on the Switch.

Input the Engine ID then click **Apply** to apply the changes and click **Default** resets to default value.



SNMP Engine ID

Engine ID

**Note:** Engine ID length is 10-64, the accepted character is from 0 to F.

Figure 58 – System &gt; SNMP Settings &gt; SNMP Engine ID

### System > SNMP Settings > SNMP Trap Settings

This page is to configure which traps will be sent to the SNMP manage hosts when event happens.

Select the event and click **Apply** to submit the changes.




The image shows the 'SNMP Trap Configuration' window. It has a title bar with 'Safeguard' on the right. Below the title bar is a section titled 'Trap Settings'. Inside this section, there are six checkboxes, all of which are currently unchecked: 'SNMP Authentication Traps', 'System Device Bootup', 'Fiber Port Link Up / Link Down', 'Twisted Pair Port Link Up / Link Down', 'RSTP Port State Change', and 'Firmware Upgrade State'. At the bottom right of the window is an 'Apply' button.

Figure 59 – System &gt; SNMP Settings &gt; SNMP Trap Setting

**System > Password Access Control**

Setting a password is a critical tool for managers to secure the Web-Smart Switch. After entering the old password and the new password two times, click **Apply** for the changes to take effect.

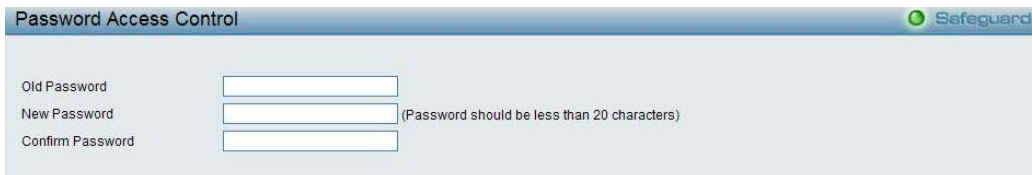

The image shows the 'Password Access Control' window. It has a title bar with 'Safeguard' on the right. Below the title bar, there are three text input fields: 'Old Password', 'New Password', and 'Confirm Password'. To the right of the 'New Password' field, there is a note in parentheses: '(Password should be less than 20 characters)'. There is no 'Apply' button visible in this screenshot.

Figure 60 – System &gt; Password Access Control

**System > System Log Settings**

System Logs record and manage events, as well as report errors and informational messages. Message severity determines a set of event message will be sent. Click **Enable** so you can start to configure the related settings of remote system log server, then press **Apply** for the changes to take effect.



The image shows the 'System Log Configuration' window. It has a title bar with 'Safeguard' on the right. Below the title bar, there is a 'System Log' section with two radio buttons: 'Enabled' (which is selected) and 'Disabled'. Below this, there are four configuration fields: 'Server IP Address' (a four-part numeric input field with '0' in each part), 'UDP Port (1-65535)' (a text input field with '514'), 'Time Stamp' (a dropdown menu with 'Enable' selected), 'Severity' (a dropdown menu with 'All' selected), and 'Facility' (a dropdown menu with 'Local 0' selected). There is no 'Apply' button visible in this screenshot.

Figure 61 – System &gt; System Log Settings

**Server IP Address:** Specifies the IP address of the system log server.

**UDP Port:** Specifies the UDP port to which the server logs are sent. The possible range is 1 – 65535, and the default value is 514.

**Time Stamp:** Select Enable to time stamp log messages.

**Severity:** Specifies the minimum severity from which warning messages are sent to the server. There are three levels. When a severity level is selected, all severity level choices above the selection are selected automatically. The possible levels are:

**Warning** - The lowest level of a device warning. The device is functioning, but an operational problem has occurred.

**Informational** - Provides device information.

**All** - Displays all levels of system logs.

**Facility:** Specifies an application from which system logs are sent to the remote server. Only one facility can be assigned to a single server. If a second facility level is assigned, the first facility is overwritten. There are up to eight facilities can be assigned (Local 0 ~ Local 7).

**Configuration > 802.1Q VLAN**

A VLAN is a group of ports that can be anywhere in the network, but communicate as though they were in the same area.

VLANs can be easily organized to reflect department groups (such as R&D, Marketing), usage groups (such as e-mail), or multicast groups (multimedia applications such as video conferencing), and therefore help to

simplify network management by allowing users to move devices to a new VLAN without having to change any physical connections.

The IEEE 802.1Q VLAN Configuration page provides powerful VID management functions. The original settings have the VID as 1, no default name, and all ports as “Untagged”

**Rename:** Click to rename the VLAN group.

**Delete VID:** Click to delete the VLAN group.

**Add New VID:** Click to create a new VID group, assigning ports from 01 to 28 as **Untag**, **Tag**, or **Not Member**. A port can be untagged in only one VID. To save the VID group, click **Apply**.

You may change the name accordingly to the desired groups, such as R&D, Marketing, email, etc.

The screenshot shows the 'IEEE 802.1Q VLAN Configuration' page. At the top, there's a header with the title and a 'Safeguard' logo. Below the header, there are radio buttons for 'Asymmetric VLAN' (selected), 'Enabled', and 'Disabled', along with an 'Apply' button. A note indicates '(Maximum Entries : 256)'. The main table has columns: VID, VLAN Name, Untagged VLAN Ports, Tagged VLAN Ports, VLAN Rename, and Delete VID. The first row shows VID 1 with no name, and all ports (01-28) listed under 'Untagged VLAN Ports'. There are 'Rename' and 'Delete VID' buttons for this entry. At the bottom right, there are 'PVID settings' and 'Add VID' buttons.

VID	VLAN Name	Untagged VLAN Ports	Tagged VLAN Ports	VLAN Rename	Delete VID
1		01,02,03,04,05,06,07,08, 09,10,11,12,13,14,15,16, 17,18,19,20,21,22,23,24, 25,26,27,28		<button>Rename</button>	<button>Delete VID</button>

Figure 62 – Configuration > 802.1Q VLAN > Default Setting

The screenshot shows the 'IEEE 802.1Q VLAN Configuration' page with the 'Add VID' dialog box open. The dialog has fields for 'VID' and 'VLAN Name' (with a note: '(Name should be less than 20 characters)'). Below these fields is a table for selecting ports. The table has columns for 'Port' (01-28) and rows for 'Untagged', 'Tagged', and 'Not Member'. Each cell contains a radio button. At the bottom of the dialog are 'Cancel' and 'Apply' buttons.

Port	Select All	01	02	03	04	05	06	07	08	09	10	11	12	13	14
Untagged	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Tagged	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Not Member	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Figure 63 – Configuration > 802.1Q VLAN > Add VID



Figure 64 – Configuration &gt; 802.1Q VLAN &gt; Example VLANs

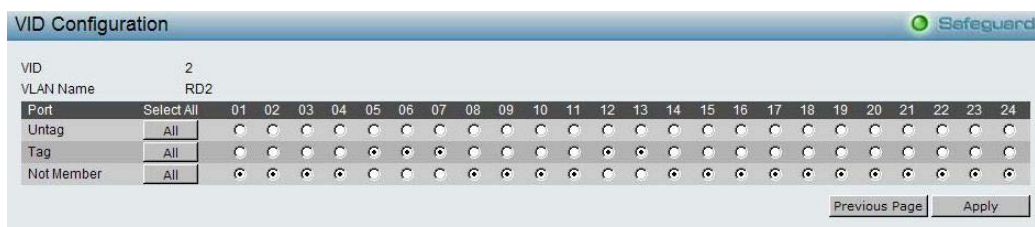


Figure 65 – Configuration &gt; 802.1Q VLAN &gt; VID Assignments

### Configuration > 802.1Q VLAN (Asymmetric VLAN)

This function is located in the 802.1Q Configuration page. It allows devices in different VLANs to communicate with the servers, firewalls or other shared resources in the shared VLAN. This configuration is accomplished in three steps:

- Enabling Asymmetric VLAN function
- Creating shared VLAN and access VLAN
- Configuring the PVID of access VLAN

Asymmetric VLAN is especially effective when used in a small network where a L3 routing device is absent, or if the resource to be shared is not capable of supporting tagged VLAN (for example, a printer).

The example below is a typical application of Asymmetric VLAN. Servers and firewall are located in shared VLAN (default VLAN), and PCs 1, 2 and 3 are located in different VLAN. Because VLANs remain separate, PCs 1, 2, and 3 cannot communicate with each other; but all of them need to access the servers or the Internet behind the firewall.

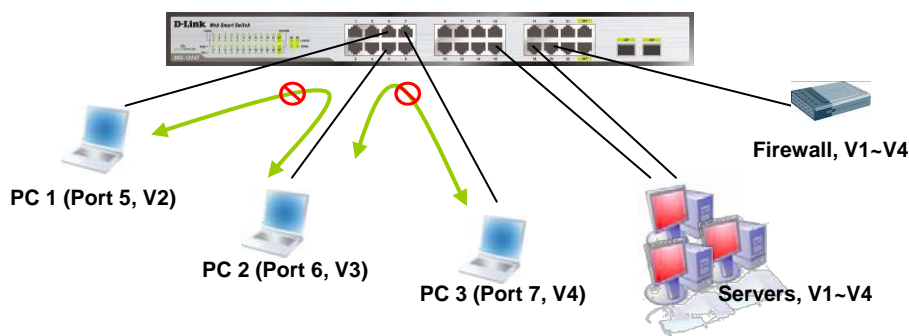


Figure 66 – Configuration &gt; 802.1Q VLAN &gt; Asymmetric VLAN Example

#### 1. Enable Asymmetric VLAN

Enable Asymmetric VLAN and click **Apply** button. The overlapping VLAN cannot be configured unless this function is enabled..



IEEE 802.1Q Asymmetric VLAN Configuration

Asymmetric VLAN [\[ Example \]](#) ☒ Enabled ☐ Disabled Apply

( Maximum Entries : 256 )

VID	VLAN Name	Untagged VLAN Ports	Tagged VLAN Ports	VLAN Rename	Delete VID
1		01,02,03,04,05,06,07,08, 09,10,11,12,13,14,15,16, 17,18,19,20,21,22,23,24, 25,26,27,28		<span>Rename</span>	<span>Delete VID</span>

Figure 67 – Configuration &gt; 802.1Q VLAN &gt; Asymmetric VLAN - Enabling Asymmetric VLAN

## 2. Configure the shared VLAN (VLAN 1) and access VLANs (VLAN 2, 3, 4)

In this case, the default VLAN is used as shared VLAN, and the ports that are shared in the network are:

- Ports 15-18 are connected to the server
- Port 20 is connected to the firewall

The group of shared ports needs to be included for all the VLANs. Ports 15-18, 20 already belong to VLAN 1, therefore no changes are needed.

VLAN 2 is configured to include ports 15-18, 20 (shared VLAN ports) and the set of ports to be separated from the other VLANs (for example, port 5). VLAN 3 and 4 are then configured to include shared ports and the set of ports to be separated from the other VLANs (for example, port 6 and 7 respectively). Therefore we have three VLANs that share some common ports, but their original membership ports are still separated from each other (for example, port 5, 6, and 7).

The VLAN settings of this example are:

- VLAN 1: default VLAN 1, including all ports with untagged.
- VLAN 2: Member ports are untagged port 5, 15-18, 20.
- VLAN 3: Member ports are untagged port 6, 15-18, 20.
- VLAN 4: Member ports are untagged port 7, 15-18, 20.

IEEE 802.1Q Asymmetric VLAN Configuration

Asymmetric VLAN [\[ Example \]](#) ☒ Enabled ☐ Disabled Apply

( Maximum Entries : 256 )

VID	VLAN Name	Untagged VLAN Ports	Tagged VLAN Ports	VLAN Rename	Delete VID
1		01,02,03,04,05,06,07,08, 09,10,11,12,13,14,15,16, 17,18,19,20,21,22,23,24, 25,26,27,28		<span>Rename</span>	<span>Delete VID</span>
2	rd2	05,15,16,17,18,20		<span>Rename</span>	<span>Delete VID</span>
3	rd3	06,15,16,17,18,20		<span>Rename</span>	<span>Delete VID</span>
4	rd4	07,15,16,17,18,20		<span>Rename</span>	<span>Delete VID</span>

Figure 68 – Configuration &gt; 802.1Q VLAN &gt; Asymmetric VLAN – Create VLANs

## 3. Configuring the PVID of access VLAN

Configure the PVID setting located at the bottom of the VLAN configuration page. The user needs to set the shared set of ports as PVID 1, and the other separated groups of ports (for example, port 5, 6, and 7) as PVID 2, 3 and 4 respectively.

The purpose of assigning PVID is to make sure the untagged packets will be transmitted correctly.

Port	01	02	03	04	05	06	07	08	09	10	11	12	13	14
PVID	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Port	15	16	17	18	19	20	21	22	23	24	25	26	27	28
PVID	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Cancel Apply

Figure 69 – Configuration &gt; 802.1Q VLAN &gt; Asymmetric VLAN – Assign PVID

After configuration, the user will be able to share the network resources set on the shared group of ports (nominated as PVID 1), with both smaller subsets of VLANs (nominated PVID 2, 3 and 4). However, VLAN 2, 3 and 4 groups are incapable of sharing information with each other directly. Click **Example** to see the example to configure asymmetric VLAN in larger networks.



**Note:** When Asymmetric VLAN is enabled, IGMP Snooping, Management VLAN, and MAC address table will be reset to default.

### Configuration > 802.1Q Management VLAN

The 802.1Q Management VLAN setting allows you to transfer the authority of the switch from the default VLAN to others created by users. This allows managing the whole network more flexible.

By default, the Management VLAN is disabled. You can select any existing VLAN as the management VLAN when this function is enabled. There can only be one management VLAN at a time.

Figure 70 – Configuration > 802.1Q Management VLAN

### Configuration > Auto Surveillance VLAN > Auto Surveillance VLAN Settings

Similar as Voice VLAN, Auto Surveillance VLAN is a feature that allows you to automatically place the video traffic from D-Link IP cameras to an assigned VLAN to enhance the IP surveillance service. With a higher priority and individual VLAN, the quality and the security of surveillance traffic are guaranteed. The Auto Surveillance VLAN function will check the source MAC address / VLAN ID on the incoming packets. If it matches specified MAC address / VLAN ID, the packets will pass through switch with desired priority.

Figure 71 – Configuration > Auto Surveillance VLAN > Auto Surveillance VLAN Settings

#### Auto Surveillance VLAN Global Settings:

**Auto Surveillance VLAN State:** Select enable or disable Auto Surveillance VLAN. The default is *Disabled*.



**VLAN ID:** By default, the VLAN ID 4094 was created as Auto Surveillance VLAN and all ports are member ports. You also can create another Auto Surveillance VLAN by selecting a VLAN ID that you have created a VLAN from the 802.1Q VLAN page. The member port you configured in 802.1Q VLAN setting page will be the static member port of Auto Surveillance VLAN.

**Priority:** The 802.1p priority levels of the traffic in the Auto Surveillance VLAN. The possible values are *Highest, High, Medium and Low*.

**Tagged Uplink/Downlink Port:** Specifies the port or ports to be tagged uplink port or downlink port for the Auto Surveillance VLAN.

Click **Apply** to implement changes of Auto Surveillance VLAN global settings.

#### User-defined MAC Settings:

**Component Type:** Auto Surveillance VLAN will automatically detect D-Link Surveillance Devices by default. There are another five surveillance components that could be configured to be auto-detected by Auto Surveillance VLAN. These five components are *Video Management Server (VMS), VMS Client/Remote viewer, Video Encoder, Network Storage and Other IP Surveillance Devices*.

**Description:** Specifies the description for the component type.

**MAC/OUI:** You can manually create an MAC or OUI address for the surveillance component. The maximum number of user defined MAC address is 5. System will auto generate an ACL profile (Profile ID: 56) for all the Auto Surveillance VLAN rules.

Click **Add** to create a new surveillance component and **Refresh** to refresh the Auto Surveillance VLAN summary table.

#### Configuration > Voice VLAN > Voice VLAN Settings

Voice VLAN is a feature that allows you to automatically place the voice traffic from IP phone to an assigned VLAN to enhance the VoIP service. With a higher priority and individual VLAN, the quality and the security of VoIP traffic are guaranteed. The Voice VLAN function will only insert the Voice VLAN tag to untagged packets under corresponding ports. If a VoIP packet comes with a VLAN tag, the Voice VLAN function won't replace the original VLAN tag.

Port	Auto Detection	Status
1	Disabled	None
2	Disabled	None
3	Disabled	None
4	Disabled	None
5	Disabled	None
6	Disabled	None
7	Disabled	None
8	Disabled	None
9	Disabled	None
10	Disabled	None
11	Disabled	None
12	Disabled	None
13	Disabled	None
14	Disabled	None
15	Disabled	None
16	Disabled	None
17	Disabled	None
18	Disabled	None
19	Disabled	None
20	Disabled	None
21	Disabled	None
22	Disabled	None

Figure 72 – Configuration > Voice VLAN > Voice VLAN Setting

**Voice VLAN State:** Select to enable or disable Voice VLAN. The default is *Disabled*. After you enabled Voice VLAN, you can configure the **Voice VLAN Global Settings**.

**VLAN ID:** The ID of VLAN that you want to assign voice traffic to. You must first create a VLAN from the 802.1Q VLAN page before you can assign a dedicated Voice VLAN. The member port you configured in 802.1Q VLAN setting page will be the static member port of voice VLAN. To dynamically add ports into the voice VLAN, please enable the **Auto Detection** function

**Priority:** The 802.1p priority levels of the traffic in the Voice VLAN.

**Aging Time:** Enter a period of time in hours to remove a port from voice VLAN if the port is an automatic VLAN member. When the last voice device stops sending traffic and the MAC address of this voice device is aged out, the voice VLAN aging timer will be started. The port will be removed from the voice VLAN after expiration of voice VLAN aging timer. Selectable range is from 1 to 120 hours and default is 1 hour.

**From Port / To Port:** A consecutive group of ports may be configured starting with the selected port.

**Auto Detection:** Switch will add ports to the voice VLAN automatically if it detects the device OUI matches the Telephony OUI configured in Voice VLAN OUI Setting page. Use the drop-down menu to enable or disable the OUI auto detection function. The default is *Disabled*

Click **Apply** to implement changes made and **Refresh** to refresh the voice vlan table.



**Note:** Voice VLAN has higher priority than any other features even QoS. Therefore the voice traffic will be operated according to Voice VLAN setting and not impacted by QoS feature.



**Note:** It is recommended setting the highest priority for Voice VLAN to guarantee the quality of VoIP traffic.

### Configuration > Voice VLAN > Voice VLAN OUI Setting

This window allows the user to configure the user-defined voice traffic's OUI. An Organizationally Unique Identifier (OUI) is the first three bytes of the MAC address. This identifier uniquely identifies a vendor, manufacturer, or other organization.

Figure 73 – Configuration > Voice VLAN > Voice VLAN OUI Setting

There are some pre-defined OUIs and when the user configures personal OUI, these pre-defined OUIs must be avoided. Below are the pre-defined voice traffic's OUI:

OUI	Vendor	Mnemonic Name
00:E0:BB	3COM	3com
00:03:6B	Cisco	cisco
00:E0:75	Veritel	veritel
00:D0:1E	Pingtel	pingtel
00:01:E3	Siemens	siemens
00:60:B9	NEC/ Philips	nec&philips
00:0F:E2	Huawei-3COM	huawei&3com
00:09:6E	Avaya	avaya

**Default OUI:** Pre-defined OUI values, including brand names of 3COM, Cisco, Veritel, Pingtel, Siemens, NEC/Philips, Huawei3COM, and Avaya.

**User defined OUI:** You can manually create a Telephony OUI with a description. The maximum number of user defined OUIs is 10. It will occupy one ACL rule when selecting user defined OUI by default, and to configure one user-defined OUI will take extra one ACL rule. System will auto generate an ACL profile (Profile ID: 51) for all the Voice VLAN rules.

Select the OUI and press **Add** to the lower table to complete the Auto Voice VLAN setting.



**Note:** The default OUI for 3COM, Cisco, Veritel, Pingtel, Siemens, NEC/Philips, Huawei3COM, and Avaya is not common for all of their VoIP devices.

### **Configuration > Link Aggregation > Port Trunking**

The Trunking function enables the combining of two or more ports together to increase bandwidth. Up to eight Trunk groups may be created, and each group can be consisted of up to eight ports. Select the ports to be grouped together, and then click **Apply** to activate the selected Trunking groups. Two types of link aggregation can be selected:

**Static** - Static link aggregation.

**LACP** - LACP (Link Aggregation Control Protocol) is enabled on the device. LACP allows for the automatic detection of links in a Port Trunking Group.

**Disable** - Remove all members in this trunk group.

Port Trunking

Link Aggregation State: ☐ Enabled ☒ Disabled Apply

Edit Trunking Information

ID:  Type:  Apply

Port	1	2	3	4	5	6	7	8	9	10	11	12	13	14
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: maximum 8 ports in static group and 8 ports in LACP group.

ID	Type	Ports
01	Disable	
02	Disable	
03	Disable	
04	Disable	
05	Disable	
06	Disable	
07	Disable	
08	Disable	

Figure 71 – Configuration > Link Aggregation > Port Trunking



**NOTE:** Each combined trunk port must be connected to devices within the same VLAN group.

### **Configuration > Link Aggregation > LACP Port Settings**

The **LACP Port Settings** is used to create port trunking groups on the Switch. The user may set which ports will be active and passive in processing and sending LACP control frames

Port	Port Priority	Activity	Timeout
01	128	Active	Long (90 sec)
02	128	Active	Long (90 sec)
03	128	Active	Long (90 sec)
04	128	Active	Long (90 sec)
05	128	Active	Long (90 sec)
06	128	Active	Long (90 sec)
07	128	Active	Long (90 sec)
08	128	Active	Long (90 sec)
09	128	Active	Long (90 sec)
10	128	Active	Long (90 sec)
11	128	Active	Long (90 sec)
12	128	Active	Long (90 sec)
13	128	Active	Long (90 sec)
14	128	Active	Long (90 sec)
15	128	Active	Long (90 sec)
16	128	Active	Long (90 sec)
17	128	Active	Long (90 sec)
18	128	Active	Long (90 sec)
19	128	Active	Long (90 sec)
20	128	Active	Long (90 sec)
21	128	Active	Long (90 sec)
22	128	Active	Long (90 sec)
23	128	Active	Long (90 sec)
24	128	Active	Long (90 sec)
25	128	Active	Long (90 sec)
26	128	Active	Long (90 sec)
27	128	Active	Long (90 sec)

Figure 72 – Configuration &gt; Link Aggregation &gt; LACP Port Settings

**From Port:** The beginning of a consecutive group of ports may be configured starting with the selected port.

**To Port:** The ending of a consecutive group of ports may be configured starting with the selected port.

**Port Priority (0-65535):** Displays the LACP priority value for the port. Default is 128.

**Activity:** There are two different roles of LACP ports:

**Active** - Active LACP ports are capable of processing and sending LACP control frames. This allows LACP compliant devices to negotiate the aggregated link so the group may be changed dynamically as needs require. In order to utilize the ability to change an aggregated port group, that is, to add or subtract ports from the group, at least one of the participating devices must designate LACP ports as active. Both devices must support LACP.

**Passive** - LACP ports that are designated as passive cannot initially send LACP control frames. In order to allow the linked port group to negotiate adjustments and make changes dynamically, one end of the connection must have "active" LACP ports.

**Timeout:** Specify the administrative LACP timeout. The possible field values are:

**Short (3 Sec)** - Defines the LACP timeout as 3 seconds.

**Long (90 Sec)** - Defines the LACP timeout as 90 seconds. This is the default value.

Click **Apply** to implement the changes made.

### Configuration > IGMP Snooping

With Internet Group Management Protocol (IGMP) snooping, the Web Smart Switch can make intelligent multicast forwarding decisions by examining the contents of each frame's Layer 2 MAC header.

IGMP snooping can help reduce cluttered traffic on the LAN. With IGMP snooping enabled globally, the Web Smart Switch will forward multicast traffic only to connections that have group members attached.

The settings of IGMP snooping is set by each VLAN individually.

Figure 73 – Configuration &gt; IGMP Snooping Configuration

By default, IGMP is disabled. If enabled, the IGMP Global Settings will need to be entered:

**Host Timeout (130-153025 sec):** This is the interval after which a learned host port entry will be purged. For each host port learned, a 'Port Purge Timer' runs for 'Host Port Purge Interval'. This timer will be restarted whenever a report message from host is received over that port. If no report messages are received for 'Host Port Purge Interval' time, the learned host entry will be purged from the multicast group. The default value is 260 seconds.

**Robustness Variable (2-255 sec):** The Robustness Variable allows adjustment for the expected packet loss on a subnet. If a subnet is expected to be lossy, the Robustness Variable may need to be increased. The Robustness Variable cannot be set to zero, and it SHOULD NOT be. Default is 2 seconds.

**Query Interval (60-600 sec):** The Query Interval is the interval between General Queries sent. By adjusting the Query Interval, the number of IGMP messages can be increased or decreased; larger values will cause IGMP Queries to be sent less often. Default value is 125 seconds.

**Router Timeout (60-600 sec):** This is the interval after which a learned router port entry will be purged. For each router port learned, a 'Router Port Purge Timer' runs for 'Router Port Purge Interval'. This timer will be restarted whenever a Query control message is received over that port. If no Query control messages are received for 'Router Port Purge Interval' time, the learned router port entry will be purged. Default is 260 seconds.


**Last Member Query Interval (1-25 sec):** The Last Member Query Interval is the Max Response Time inserted into Group-Specific Queries sent in response to Leave Group messages, and is also the amount of time between Group-Specific Query messages. This value may be adjusted to modify the "leave latency" of the network. A reduced value results in reduced time to detect the loss of the last member of a group. Default is 1 second.

**Max Response Time (10-25 sec):** The Max Response Time specifies the maximum allowed time before sending a responding report message. Adjusting this setting effects the "leave latency", or the time between the moment the last host leaves a group and when the multicast server is notified that there are no more members. It also allows adjustments for controlling the frequency of IGMP traffic on a subnet. Default is 10 seconds.

**Querier State:** D-Link Smart Switch is able to send out the IGMP Queries to check the status of multicast clients. Default is disabled.

To enable IGMP snooping for a given VLAN, select enable and click on the **Apply** button. Then press the **Edit** button under **Router Port Setting**, and select the ports to be assigned as router ports for IGMP snooping for the VLAN, and press **Apply** for changes to take effect. A router port configured manually is a **Static Router Port**, and a **Dynamic Router Port** is dynamically configured by the Switch when query control message is received.



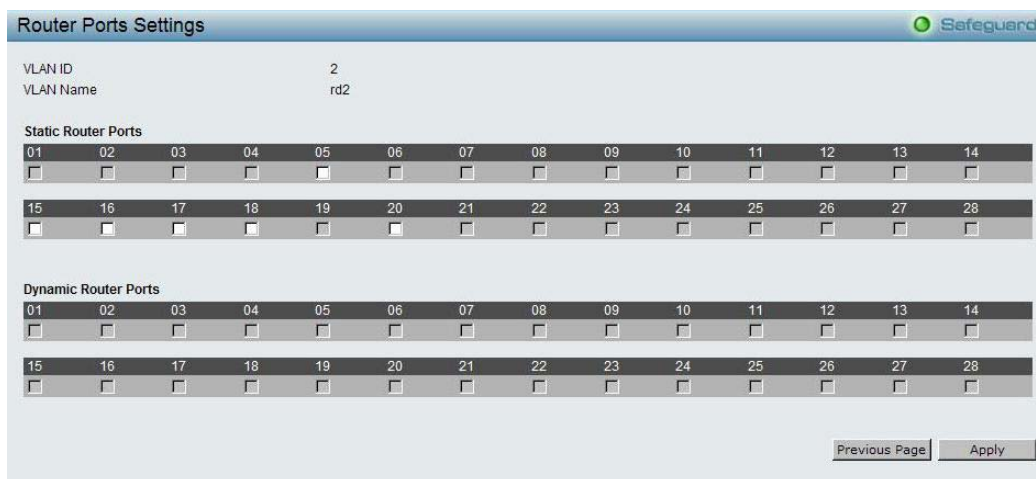

**Router Ports Settings**

VLAN ID: 2  
VLAN Name: rd2

**Static Router Ports**

01	02	03	04	05	06	07	08	09	10	11	12	13	14
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	16	17	18	19	20	21	22	23	24	25	26	27	28
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**Dynamic Router Ports**

01	02	03	04	05	06	07	08	09	10	11	12	13	14
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	16	17	18	19	20	21	22	23	24	25	26	27	28
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Previous Page Apply

Figure 74 – Configuration &gt; IGMP Router port Settings

To view the Multicast Entry Table for a given VLAN, press the **View** button.



**Multicast Entry Table**

Group ID	VLAN ID	VLAN Name	Multicast Group	Multicast MAC address	Port Members

Figure 75 – Configuration &gt; IGMP Multicast Entry Table


### **Configuration > Multicast Filtering Mode (For DES-1210-08P/28)**

The **Multicast Filtering Mode** function allows users to select the filtering mode for IGMP group per port basis.

**From Port/To Port:** A consecutive group of ports may be configured starting with the selected port.

**Forward Unregistered Groups:** The multicast stream will be forwarded based on the register table in registered group, but it will be flooded to all ports of the VLAN in unregistered group.

**Filter Unregistered Groups:** The registered group will be forwarded based on the register table and the unregistered group will be filtered.

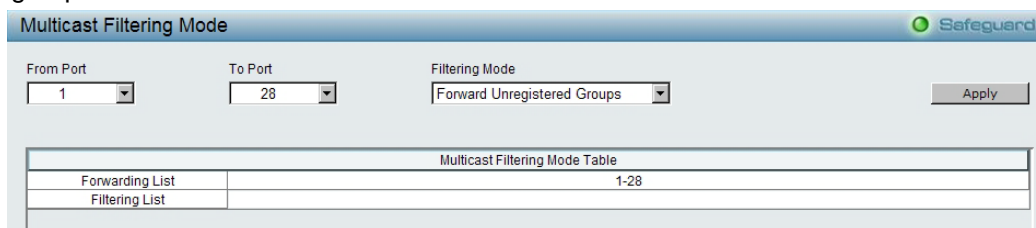

**Multicast Filtering Mode**

From Port: 1 To Port: 28 Filtering Mode: Forward Unregistered Groups

Apply

Multicast Filtering Mode Table	
Forwarding List	1-28
Filtering List	

Figure 76 – Configuration &gt; Multicast Filtering Mode

### **Configuration > Multicast Filtering Mode (For DES-1210-28P/52)**

The **Multicast Filtering Mode** function allows users to select the filtering mode for IGMP group per VLAN basis.

**Forward All Groups:** The multicast stream will be flooded to all ports of the VLAN for both registered and unregistered groups.

**Forward Unregistered Groups:** The multicast stream will be forwarded based on the register table in registered group, but it will be flooded to all ports of the VLAN in unregistered group.

**Filter Unregistered Groups:** The registered group will be forwarded based on the register table and the unregistered group will be filtered.

**Multicast Filtering Mode**

VLAN ID:  All ☐ Filtering Mode:

Multicast Filtering Mode Table Total Entries: 2

VLAN ID	VLAN Name	Multicast Filtering Mode
1	RD1	Forward Unregistered Groups
2	RD2	Forward Unregistered Groups

Figure 77 – Configuration &gt; Multicast Filtering Mode

### Configuration > Port Mirroring

Port Mirroring is a method of monitoring network traffic that forwards a copy of each incoming and/or outgoing packet from one port of the Switch to another port where the packet can be studied. This enables network managers to better monitor network performances.

**Port Mirroring Configuration**

Port Mirroring: ☐ Enabled ☒ Disabled

Target Port:

Source Port Selection

Sniffer Mode	Select All	01	02	03	04	05	06	07	08	09	10	11	12	13	14
TX	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
RX	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Both	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
None	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Sniffer Mode	Select All	15	16	17	18	19	20	21	22	23	24	25	26	27	28
TX	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
RX	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Both	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
None	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Figure 78 – Configuration &gt; Port Mirroring

Selection options for the Source Ports are as follows:

**TX (transmit) mode:** Duplicates the data transmitted from the source port and forwards it to the Target Port. Click “all” to include all ports into port mirroring.

**RX (receive) mode:** Duplicates the data that received from the source port and forwards it to the Target Port. Click “all” to include all ports into port mirroring.

**Both (transmit and receive) mode:** Duplicate both the data transmitted from and data sent to the source port, and forwards all the data to the assigned Target Port. Click “all” to include all ports into port mirroring.

**None:** Turns off the mirroring of the port. Click “all” to remove all ports from mirroring.

### Configuration > Loopback Detection

The Loopback Detection function is used to detect the loop created by a specific port while Spanning Tree Protocol (STP) is not enabled in the network, especially when the down links are hubs or unmanaged switches. The Switch will automatically shutdown the port and sends a log to the administrator. The Loopback Detection port will be unlocked when the Loopback Detection **Recover Time** times out. The Loopback Detection function can be implemented on a range of ports at a time. You may enable or disable this function using the pull-down menu.

**Loopback Detection Settings**

State: ☐ Enabled ☒ Disabled

**Loopback Detection Global Settings**

Interval (1-32767):  sec

Recover Time (0 or 60-1000000):  sec Apply

From Port:  To Port:  State:  Apply Refresh

Port	Loopdetect Detection State	Loop Status
1	Disabled	Normal
2	Disabled	Normal
3	Disabled	Normal
4	Disabled	Normal
5	Disabled	Normal
6	Disabled	Normal
7	Disabled	Normal
8	Disabled	Normal
9	Disabled	Normal
10	Disabled	Normal
11	Disabled	Normal
12	Disabled	Normal
13	Disabled	Normal
14	Disabled	Normal
15	Disabled	Normal
16	Disabled	Normal
17	Disabled	Normal
18	Disabled	Normal
19	Disabled	Normal
20	Disabled	Normal
21	Disabled	Normal
22	Disabled	Normal
23	Disabled	Normal

Figure 79 – Configuration &gt; Loopback Detection

**Loopback Detection State:** Use the drop-down menu to enable or disable loopback detection. The default is *Disabled*.

**Interval (1-32767):** Set a Loop detection Interval between 1 and 32767 seconds. The default is 2 seconds.

**Recover Time (0 or 60-1000000):** Time allowed (in seconds) for recovery when a Loopback is detected. The Loop Detection Recover Time can be set at 0 seconds, or 60 to 1000000 seconds. Entering 0 will disable the Loop Detection Recover Time. The default is 60 seconds.

**From Port:** The beginning of a consecutive group of ports may be configured starting with the selected port.

**To Port:** The ending of a consecutive group of ports may be configured starting with the selected port.

**State:** Use the drop-down menu to toggle between *Enabled* and *Disabled*. Default is *Disabled*.

Click **Apply** to implement changes made.

### Configuration > SNTP Settings > Time Settings

SNTP or Simple Network Time Protocol is used by the Switch to synchronize the clock of the computer. The SNTP settings folders contain two windows: Time Settings and TimeZone Settings. Users can configure the time settings for the switch, and the following parameters can be set or are displayed in the Time Settings page.



**Time Settings** Safeguard

Clock Source: ☒ Local ☐ SNTP

Current Time: 01/01/2009 20:56:46

---

**SNTP Server Configuration**

SNTP First Server:

SNTP Second Server:

SNTP Poll Interval In Seconds (30-99999):

---

☒ **Manually set current time**

Date (DD/MM/YYYY):

Time (HH:MM:SS):

☐ **Set time from PC**

Date (DD/MM/YYYY):

Time (HH:MM:SS):

Figure 80 – Configuration > SNTP Settings > Time Settings

**Clock Source:** Specify the clock source by which the system time is set. The possible options are:

**Local** - Indicates that the system time is set locally by the device.

**SNTP** - Indicates that the system time is retrieved from a SNTP server.

**Current Time:** Displays the current date and time for the switch.

If choosing **SNTP** for the clock source, then the following parameters will be available:

**SNTP First Server:** Specify the IP address of primary SNTP server from which the system time is retrieved.

**SNTP Second Server:** Specify the IP address of secondary SNTP server from which the system time is retrieved.

**SNTP Poll Interval in Seconds (30-99999):** Defines the interval (in seconds) at which the SNTP server is polled for Unicast information. The Poll Interval default is 30 seconds.

Click **Apply** to implement changes made.

When selecting **Local** for the clock source, users can select from one of two options:

**Manually set current time:** Users input the system time manually.

**Set time from PC:** The system time will be synchronized from the local computer.

### Configuration > SNTP Settings > TimeZone Settings

The TimeZone Setting Page is used to configure time zones and Daylight Savings time settings for SNTP.

Figure 81 – Configuration &gt; SNTP Settings &gt; TimeZone Settings

**Daylight Saving Time State:** Use this drop-down menu to enable or disable the DST Settings.

**Daylight Saving Time Offset in Minutes:** Use this drop-down menu to specify the amount of time that will constitute your local DST offset - 30, 60, 90, or 120 minutes.

**Time Zone Offset from GMT in +/- HH:MM:** Use these drop-down menus to specify your local time zone's offset from Greenwich Mean Time (GMT.)

**DST Annual Settings:** Using annual mode will enable DST seasonal time adjustment. Annual mode requires that the DST beginning and ending date be specified concisely is not in the same month. For example, specify to begin DST on March 8 and end DST on November 1.

**From: Month:** Enter the month DST will start on, each year.

**From: Day:** Enter the day of the week DST will start on, each year.

**From: Time in HH:MM:** Enter the time of day DST will start on, each year.

**To: Month:** Enter the month DST will end on, each year.

**To: Day:** Enter the date DST will end on, each year.

**To: Time in HH:MM:** Enter the time of day that DST will end on, each year.

Click **Apply** to implement changes made.

### **Configuration > Spanning Tree > STP Global Settings**

The Switch implements two versions of the Spanning Tree Protocol, the Rapid Spanning Tree Protocol (RSTP) as defined by the IEEE 802.1w specification and a version compatible with the IEEE 802.1D STP. RSTP can operate with legacy equipment implementing IEEE 802.1D, however the advantages of using RSTP will be lost.

The IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) evolved from the 802.1D STP standard. RSTP was developed in order to overcome some limitations of STP that impede the function of some recent switching innovations. The basic function and much of the terminology is the same as STP. Most of the settings configured for STP are also used for RSTP. This section introduces some new Spanning Tree concepts and illustrates the main differences between the two protocols.

By default, Rapid Spanning Tree is disabled. If enabled, the Switch will listen for BPDU packets and its accompanying Hello packet. BPDU packets are sent even if a BPDU packet was not received. Therefore,

each link between bridges is sensitive to the status of the link. Ultimately this difference results in faster detection of failed links, and thus faster topology adjustment.

After enabling STP, setting the STP Global Setting includes the following options:

Figure 82 – Configuration > Spanning Tree > STP Global Settings

**STP Version:** You can choose RSTP or STP Compatible. The default setting is RSTP.

**Bridge Priority:** This value between 0 and 61410 specifies the priority for forwarding packets: the lower the value, the higher the priority. The default is 32768.

**TX Hold Count (1-10):** Used to set the maximum number of Hello packets transmitted per interval. The count can be specified from 1 to 10. The default is 6.

**Maximum Age (6-40 sec):** This value may be set to ensure that old information does not endlessly circulate through redundant paths in the network, preventing the effective propagation of the new information. Set by the Root Bridge, this value will aid in determining that the Switch has spanning tree configuration values consistent with other devices on the bridged LAN. If the value ages out and a BPDU has still not been received from the Root Bridge, the Switch will start sending its own BPDU to all other switches for permission to become the Root Bridge. If it turns out that the Switch has the lowest Bridge Identifier, it will become the Root Bridge. A time interval may be chosen between 6 and 40 seconds. The default value is 20. (Max Age has to have a value bigger than Hello Time)

**Hello Time (1-10 sec):** The user may set the time interval between transmissions of configuration messages by the root device, thus stating that the Switch is still functioning. The default is 2 seconds.

**Forward Delay (4-30 sec):** This sets the maximum amount of time that the root device will wait before changing states. The default is 15 seconds.

**Root Bridge:** Displays the MAC address of the Root Bridge.

**Root Maximum Age:** Displays the Maximum Age of the Root Bridge.

**Root Forward Delay:** Displays the Forward Delay of the Root Bridge.

**Root port:** Displays the root port.

Click **Apply** for the settings to take effect. Click **Refresh** to renew the page.

### Configuration > Spanning Tree > STP Port Settings

STP can be set up on a port per port basis. In addition to setting Spanning Tree parameters for use on the switch level, the Switch allows for the configuration of groups of ports, each port-group of which will have its own spanning tree, and will require some of its own configuration settings.

An STP Group spanning tree works in the same way as the switch-level spanning tree, but the root bridge concept is replaced with a root port concept. A root port is a port of the group that is elected based on port priority and port cost, to be the connection to the network for the group. Redundant links will be blocked, just as redundant links are blocked on the switch level.

The STP on the switch level blocks redundant links between switches (and similar network devices). The port level STP will block redundant links within an STP Group.

It is advisable to define an STP Group to correspond to a VLAN group of ports.

Port	State	Priority	External Cost	Edge	P2P	Restricted Role	Restricted TCN	Port State
01	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
02	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
03	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
04	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
05	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
06	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
07	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
08	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
09	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
10	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
11	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
12	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
13	Enable	128	AUTO/200000	Auto	Auto	False	False	Forwarding
14	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
15	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
16	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
17	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
18	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
19	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
20	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
21	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
22	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
23	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking
24	Enable	128	AUTO/200000	Auto	Auto	False	False	Blocking

Figure 83 – Configuration &gt; Spanning Tree &gt; STP Port Settings

**From Port/To Port:** A consecutive group of ports may be configured starting with the selected port.

**State:** Use the drop-down menu to enable or disable STP by per-port based. It will be selectable after the global STP is enabled.

**External Cost:** This defines a metric that indicates the relative cost of forwarding packets to the specified port list. Port cost can be set automatically or as a metric value. The default value is 0 (auto).

**0 (auto)** - Setting 0 for the external cost will automatically set the speed for forwarding packets to the specified port(s) in the list for optimal efficiency. Default port cost: 100Mbps port = 200000. Gigabit port = 20000.

**Value 1-2000000000** - Define a value between 1 and 2000000000 to determine the external cost. The lower the number, the greater the probability the port will be chosen to forward packets.

**Migrate:** Setting this parameter as Yes will set the ports to send out BPDUs to other bridges, requesting information on their STP setting. If the Switch is configured for RSTP, the port will be capable to migrate from 802.1d STP to 802.1w RSTP. Migration should be set as yes on ports connected to network stations or segments that are capable of being upgraded to 802.1w RSTP on all or some portion of the segment.

**Edge:** Selecting the *True* parameter designates the port as an edge port. Edge ports cannot create loops, however an edge port can lose edge port status if a topology change creates a potential for a loop. An edge port normally should not receive BPDUs. If a BPDU packet is received, it automatically loses edge port status. Selecting the *False* parameter indicates that the port does not have edge port status. Selecting the *Auto* parameter indicates that the port have edge port status or not have edge port status automatically.

**Priority:** Specify the priority of each port. Selectable range is from 0 to 240, and the default setting is 128. The lower the number, the greater the probability the port will be chosen as a root port.

**P2P:** Choosing the *True* parameter indicates a point-to-point (P2P) shared link. P2P ports are similar to edge ports, however they are restricted in that a P2P port must operate in full-duplex.

Like edge ports, P2P ports transition to a forwarding state rapidly thus benefiting from RSTP. A p2p value of *false* indicates that the port cannot have p2p status. *Auto* allows the port to have p2p status whenever possible and operate as if the p2p status were true. If the port cannot maintain this status, (for example if the port is forced to half-duplex operation) the p2p status changes to operate as if the p2p value were *False*. The default setting for this parameter is *Auto*.

**Restricted Role:** Toggle between *True* and *False* to set the restricted role state of the packet. If set to *True*, the port will never be selected to be the Root port. The default value is *False*.

**Restricted TCN:** Toggle between *True* and *False* to set the restricted TCN of the packet. Topology Change Notification (TCN) is a BPDU that a bridge sends out to its root port to signal a topology change. If set to *True*, it stops the port from propagating received TCN and to other ports. The default value is *False*.

Click **Apply** for the settings to take effect. Click **Refresh** to renew the page.

### QoS > Storm Control

The Storm Control feature provides the ability to control the receive rate of broadcast, multicast, and unknown unicast packets. Once a packet storm has been detected, the Switch will drop packets coming into the Switch until the storm has subsided.

Figure 84 – QoS > Storm Control

**Storm Control Type:** User can select the different Storm type from Broadcast Only, Multicast & Broadcast, and Multicast & Broadcast & Unknown Unicast.

**Threshold:** If storm control is enabled (default is disabled), the threshold can be set here. For DES-1210-08P/28, the threshold is from 63 ~ 1,000,062 Kbit, with steps (N) of 63Kbps. For DES-1210-28P/52, the threshold is from 64 ~ 1,024,000 Kbit per second, with steps (N) of 64Kbps. N can be from 1 to 16000.

Click **Apply** for the settings to take effect.

### QoS > Bandwidth Control

The Bandwidth Control page allows network managers to define the bandwidth settings for a specified port's transmitting and receiving data rates.

Port	Tx Rate (Kbits/sec)	Rx Rate (Kbits/sec)
01	No Limit	No Limit
02	No Limit	No Limit
03	No Limit	No Limit
04	No Limit	No Limit
05	No Limit	No Limit
06	No Limit	No Limit
07	No Limit	No Limit
08	No Limit	No Limit
09	No Limit	No Limit
10	No Limit	No Limit
11	No Limit	No Limit
12	No Limit	No Limit
13	No Limit	No Limit
14	No Limit	No Limit
15	No Limit	No Limit
16	No Limit	No Limit
17	No Limit	No Limit
18	No Limit	No Limit
19	No Limit	No Limit
20	No Limit	No Limit
21	No Limit	No Limit
22	No Limit	No Limit
23	No Limit	No Limit
24	No Limit	No Limit
25	No Limit	No Limit
26	No Limit	No Limit
27	No Limit	No Limit
28	No Limit	No Limit

Note: The multiple of 1850 Kbits/sec will be set automatically because the resolution of Giga-port Tx bandwidth control is 1850 Kbits/sec.

Figure 85 – QoS > Bandwidth Control



**From Port / To Port:** A consecutive group of ports may be configured starting with the selected port.

**Type:** This drop-down menu allows you to select between *RX* (receive), *TX* (transmit), and *Both*. This setting will determine whether the bandwidth ceiling is applied to receiving, transmitting, or both receiving and transmitting packets.

**No Limit:** This drop-down menu allows you to specify that the selected port will have no bandwidth limit. *Enabled* disables the limit.

**Rate (64-1024000):** This field allows you to enter the data rate, in Kbits per second, will be the limit for the selected port. For DES-1210-08P/28, the Rate value is between 63 and 1000000. For DES-1210-28P/52, the value is between 64 and 1024000.

Click **Apply** to set the bandwidth control for the selected ports.



**NOTE:** For DES-1210-28P/52, the TX rate for Gigabit ports can only be configured in multiples of 1850kbps. If any other value is used, the system automatically rounds it down to the lower multiple of 1850.

For DES-1210-08P/28, the TX rate for Gigabit ports can only be configured in multiples of 63kbps. If any other value is used, the system automatically rounds it down to the lower multiple of 63.

### QoS > 802.1p/DSCP Priority Settings

QoS is an implementation of the IEEE 802.1p standard that allows network administrators to reserve bandwidth for important functions that require a larger bandwidth or that might have a higher priority, such as VoIP (voice-over Internet Protocol), web browsing applications, file server applications or video conferencing. Thus with larger bandwidth, less critical traffic is limited, and therefore excessive bandwidth can be saved.

The following figure displays the status of Quality of Service priority levels of each port, higher priority means the traffic from this port will be first handled by the switch. For packets that are untagged, the switch will assign the priority depending on your configuration.

**IEEE 802.1p Default Priority** Safeguard

Select QoS Mode: ☒ 802.1p ☐ DSCP

Queuing mechanism: ☒ Strict Priority ☐ WRR (By default is strict priority)

By default the 802.1p is chosen. To enable DSCP mode, please select the DSCP mode and press "Apply" to go to DSCP Priority Settings page.

From Port:  To Port:  Priority:  Apply

Port	Priority
1	Medium
2	Medium
3	Medium
4	Medium
5	Medium
6	Medium
7	Medium
8	Medium
9	Medium
10	Medium
11	Medium
12	Medium
13	Medium
14	Medium
15	Medium
16	Medium
17	Medium
18	Medium
19	Medium
20	Medium
21	Medium
22	Medium
23	Medium
24	Medium
25	Medium

For ingress untagged packets, the per port "Default Priority" settings will be applied to packets of each port to provide port-based traffic prioritization. For ingress tagged packets, D-Link Smart Switches will refer to their 802.1p information and prioritize them with 4 different priority queues.

Figure 86 – QoS > 802.1p Default Priority

By selecting the DSCP priority, the web pages will changes as seen below:

DSCP value	Priority	DSCP value	Priority	DSCP value	Priority	DSCP value	Priority
0	Low	16	Low	32	Low	48	Low
1	Low	17	Low	33	Low	49	Low
2	Low	18	Low	34	Low	50	Low
3	Low	19	Low	35	Low	51	Low
4	Low	20	Low	36	Low	52	Low
5	Low	21	Low	37	Low	53	Low
6	Low	22	Low	38	Low	54	Low
7	Low	23	Low	39	Low	55	Low
8	Low	24	Low	40	Low	56	Low
9	Low	25	Low	41	Low	57	Low
10	Low	26	Low	42	Low	58	Low
11	Low	27	Low	43	Low	59	Low
12	Low	28	Low	44	Low	60	Low
13	Low	29	Low	45	Low	61	Low
14	Low	30	Low	46	Low	62	Low
15	Low	31	Low	47	Low	63	Low

Figure 87 – QoS > DSCP Priority Settings

**Select QoS Mode:** D-Link Smart Switch allows the user to prioritize the traffic based on the 802.1p priority in the VLAN tag or the DSCP (Differentiated Services Code Point) priority in the IP header. Only one mechanism is selected to prioritize the packets at a time.

**Queuing Mechanism:** Select Strict Priority to process the packets with the highest priority first. Select WRR (Weighted Round-Robin) to process packets according to the weight of each priority. When a priority level has reached its egress weight, the system will process the packets in the next level even if there are remaining packets. D-Link Smart Switch system's weight of priority levels are: 8 (Highest), 4 (High), 2 (Medium) and 1 (Low) packet. By default, the queuing mechanism is **Strict Priority**.

**Default Priority:** Default is **Medium**. In 802.1p QoS mode, you can use **From Port / To Port** to specify the default priority of each port. In DSCP mode, you can configure the global default priority value by using **From DSCP value / To DSCP value**.

### Security > Trusted Host

Use Trusted Host function to manage the switch from a remote station. You can enter up to ten designated management stations networks by defining the IP address/Subnet Mask as seen in the figure below.

Figure 88 Security > Trusted Host

To define a management station IP setting, click the **Add Host** button and type in the IP address and Subnet mask. Click the **Apply** button to save your settings. You may permit only single or a range of IP addresses


by different IP mask setting, the format can be either 192.168.1.1/255.255.255.0 or 192.168.0.1/24. Please see the example below for permitting the IP range

IP Address	Subnet Mask	Permitted IP
192.168.0.1	255.255.255.0	192.168.0.1~192.168.0.255
172.17.5.215	255.0.0.0	172.0.0.1~172.255.255.255

To delete the IP address simply click the **Delete** button, check the unwanted address, and then click **Apply**.

### **Security > Safeguard Engine**

D-Link's **Safeguard Engine** is a robust and innovative technology that automatically throttles the impact of packet flooding into the switch's CPU. This function helps protect the Web-Smart Switch from being interrupted by malicious viruses or worm attacks. This option is enabled by default.

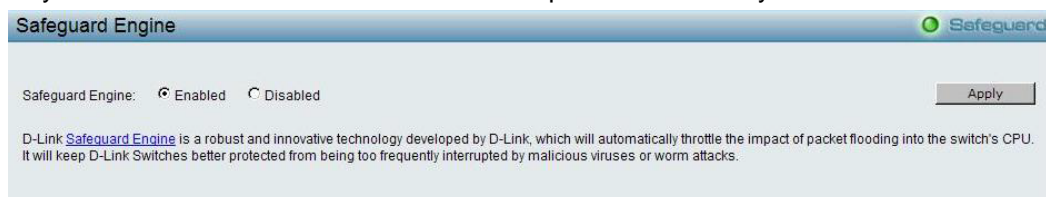

**Figure 89 – Security > Safeguard Engine**

### **Security > ARP Spoofing Prevention**

ARP spoofing, also known as ARP poisoning, is a method to attack an Ethernet network by allowing an attacker to sniff data frames on a LAN, modifying the traffic, or stopping the traffic (known as a Denial of Service – DoS attack). The main idea of ARP spoofing is to send fake or spoofed ARP messages to an Ethernet network. It associates the attacker's or random MAC address with the IP address of another node such as the default gateway. Any traffic meant for that IP address would be mistakenly re-directed to the node specified by the attacker.

A common DoS attack today can be done by associating a nonexistent or specified MAC address to the IP address of the network's default gateway. The malicious attacker only needs to broadcast one gratuitous ARP to the network claiming to be the gateway, so that the whole network operation is turned down as all packets to the Internet will be directed to the wrong node.

The ARP Spoofing Prevention function can discard the ARP Spoofing Attack in the network by checking the gratuitous ARP packets and filtering those with illegal IP or MAC addresses. Enter the **Router/Gateway IP Address, MAC Address**, Ports and then click **Add** to create a checking/filtering rule. Click **Delete** to remove an existing rule and **Delete All** to clear all the entries.



### ARP Spoofing Prevention Setting

Router / Gateway IP Address

Router / Gateway MAC Address

Ports

☐ All Ports

Add

Total Entries: 0  
( Note:64 Entries Maximum. )

Delete All

Router / Gateway IP Address	Router / Gateway MAC Address	Ports
-----------------------------	------------------------------	-------

**Note :**

1. ARP is the standard for finding a host's MAC address. However, this protocol is vulnerable that cracker can spoof the IP and MAC information in the ARP packets to attack a LAN.
2. The main purpose of this feature is to protect network from Man-in-the-Middle or ARP spoofing attack including router / gateway or specific client.

**Figure 90 – Security > ARP Spoofing Prevention**

## Security > Port Security

Port Security is a security feature that prevents unauthorized computers (with source MAC addresses) unknown to the Switch prior to stopping auto-learning processing from gaining access to the network.

A given ports' (or a range of ports') dynamic MAC address learning can be stopped such that the current source MAC addresses entered into the MAC address forwarding table cannot be changed once the port is enabled. Using the drop-down menu, change **Admin State** to **Enabled**, input the **Max Learning Address**, and then click **Apply** to confirm the setting.

Port Security

Safeguard

From Port

To Port

Admin State

Max Learning Address (0-64)

01

28

Disabled

0

Apply

Port Security

Port	Admin State	Max Learning Address
01	Disabled	0
02	Disabled	0
03	Disabled	0
04	Disabled	0
05	Disabled	0
06	Disabled	0
07	Disabled	0
08	Disabled	0
09	Disabled	0
10	Disabled	0
11	Disabled	0
12	Disabled	0
13	Disabled	0
14	Disabled	0
15	Disabled	0
16	Disabled	0
17	Disabled	0
18	Disabled	0
19	Disabled	0
20	Disabled	0
21	Disabled	0
22	Disabled	0
23	Disabled	0
24	Disabled	0
25	Disabled	0
26	Disabled	0
27	Disabled	0
28	Disabled	0

### Figure 94 – Security > Port Security

### Security > SSL Settings

Secure Sockets Layer (SSL) is a security feature that provides a secure communication path between a Web Management host and the Switch Web UI by using authentication, digital signatures and encryption. These security functions are implemented by Ciphersuite, a security string that determines the cryptographic parameters, encryption algorithms and key sizes.

This page allows you to configure the SSL global state and the Ciphersuite settings. Select **Enable** or **Disable** and then click **Apply** to change the SSL state or the Ciphersuite settings of the Switch. By default, SSL is **Disabled** and all Ciphersuites are **Enabled**.

Figure 95 – Security > SSL Settings



**NOTE:** When SSL is enabled, it will take longer time to open a web page due to encryption. After saving configuration, please wait around 10 seconds for the system summary page.

### Security > 802.1X > 802.1X Settings

Network switches provide easy and open access to resources by simply attaching a client PC. Unfortunately this automatic configuration also allows unauthorized personnel to easily intrude and possibly gain access to sensitive data.

IEEE-802.1X provides a security standard for network access control, especially in Wi-Fi wireless networks. 802.1X holds a network port disconnected until authentication is completed. The switch uses Extensible Authentication Protocol over LANs (EAPOL) to exchange authentication protocol client identity (such as a user name) with the client, and forward it to another remote RADIUS authentication server to verify access rights. The EAP packet from the RADIUS server also contains the authentication method to be used. The client can reject the authentication method and request another, depending on the configuration of the client software and the RADIUS server. Depending on the authenticated results, the port is either made available to the user, or the user is denied access to the network.

The RADIUS servers make the network a lot easier to manage for the administrator by gathering and storing the user lists.

**802.1X Settings**

802.1X ☐ Enabled ☒ Disabled

**802.1X Global Settings**

Radius Server IP: [ ][ ][ ][ ] QuietPeriod (0 - 65535 sec): [ 60 ]

Key: [ ] SuppTimeout (1 - 65535 sec): [ 12 ]

Confirm Key: [ ] ServerTimeout (1 - 65535 sec): [ 16 ]

TxPeriod (1 - 65535 sec): [ 24 ] MaxReq (1 - 10): [ 2 ]

ReAuthEnabled: [ Disabled ] ReAuthPeriod (1 - 4294967295 sec): [ 3600 ]

[ Apply ]

**802.1X Port Access Control**

From Port: [ 01 ] To Port: [ 28 ] Control: [ Auto ] [ Apply ] [ Refresh ]

Port	Control	Port Status	Session Time	User ID
01	Force Authorized	*	0	*****
02	Force Authorized	*	0	*****
03	Force Authorized	*	0	*****
04	Force Authorized	*	0	*****
05	Force Authorized	*	0	*****
06	Force Authorized	*	0	*****
07	Force Authorized	*	0	*****
08	Force Authorized	*	0	*****
09	Force Authorized	*	0	*****
10	Force Authorized	*	0	*****
11	Force Authorized	*	0	*****
12	Force Authorized	*	0	*****
13	Force Authorized	*	0	*****
14	Force Authorized	*	0	*****
15	Force Authorized	*	0	*****
16	Force Authorized	*	0	*****

Figure 96 – Security &gt; 802.1X &gt; 802.1X Settings

By default, 802.1X is disabled. To use EAP for security, select enabled and set the 802.1X **Global Settings** for the Radius Server and applicable authentication information.

**RADIUS Server IP:** The IP address of the external Radius Server. You need to specify an RADIUS server to enable 802.1X authentication.

**Key:** Masked password matching the Radius Server Key. The max. length is 32 characters.

**Confirm Key:** Enter the Key a second time for confirmation.

**TxPeriod (1 – 65535 sec):** This sets the TxPeriod of time for the authenticator PAE state machine. This value determines the period of an EAP Request/Identity packet transmitted to the client. Default is 24 seconds.

**ReAuthEnabled:** This function is to determine whether regular re-authentication will take place on this port(s). When the 802.1X function is enabled, the switch sends an EAP-request/identity packet to client. The ReAuthEnabled function is by default disabled.

**QuietPeriod (0 – 65535 sec):** Sets the number of seconds that the switch remains in the quiet state following a failed authentication exchange with the client. Default is 60 seconds.

**SuppTimeout (1 – 65535 sec):** This value determines timeout conditions in the exchanges between the Authenticator and the client. Default is 12 seconds.

**ServerTimeout (1 – 65535 sec):** Sets the amount of time the switch waits for a response from the client before resending the response to the authentication server. Default is 16 seconds.

**MaxReq (1 – 10):** This parameter specifies the maximum number of times that the switch retransmits an EAP request (md-5challenge) to the client before it times out the authentication session. Default is 2 times.

**ReAuthPeriod (1 – 4294967295 sec):** This command affects the behavior of the switch only if periodic re-authentication is enabled. Default is 3600.

To establish 802.1X port-specific assignments, select the **From Ports / To Ports** and select **Enable**.

**802.1X Port Access Control:** Three type of Port Access Control State can be "**Force Authorized**", "**Force Unauthorized**", and "**Auto**".

Select **Force Authorized** to disable 802.1X and cause the port to transition to the authorized state without any authentication exchange required. This means the port transmits and receives normal traffic without 802.1X-based authentication of the client.

If **Force Unauthorized** is selected, the port will remain in the unauthorized state ignoring all attempts by the client to authenticate. The Switch cannot provide authentication services to the client through the interface.

If **Auto** is selected, it will enable 802.1X and cause the port to begin in the unauthorized state, allowing only EAPOL frames to be sent and received through the port. The authentication process begins when the link state of the port transitions from down to up, or when an EAPOL-start frame is received. The Switch then requests the identity of the client and begins relaying authentication messages between the client and the authentication server.

The default setting is **Auto**.

### **Security > MAC Address Table > Static MAC**

This feature provides two distinct functions. The **Disable Auto Learning** table allows turning off the function of learning MAC address automatically, if a port isn't specified as an uplink port (for example, connects to a DHCP Server or Gateway). By default, this feature is Off (disabled).

Figure 97 – Security > MAC Address Table > Static Mac Address

To initiate the removal of auto-learning for any of the uplink ports, click **On** to enable this feature, and then select the port(s) for auto learning to be disabled.

The **Static MAC Address Setting** table displays the static MAC addresses connected, as well as the VID. Click **Add Mac** to add a new MAC address, you also need to select the assigned Port number, enter both the Mac Address and VID and Click **Apply**. Click **Delete** to remove one entry or click **Delete all** to clear the list. You can also copy a learned MAC address from **Dynamic Forwarding Table** (please refer to **Security > MAC Address Table > Dynamic Forwarding Table** for details).

By disabling Auto Learning capability and specify the static MAC addresses, the network is protected from potential threats like hackers because traffic from illegal MAC addresses will not be forwarded by the Switch.

### **Security > MAC Address Table > Dynamic Forwarding Table**

For each port, this table displays the MAC address learned by the Switch. To add a MAC address to the Static Mac Address List, click the **Add** checkbox, and then click **Apply** associated with the identified address.

Dynamic Forwarding Table Configuration

Port:  Find

ID	Port	MAC Address	VID	Type	Add
1	21	00-00-00-11-AA-AA	1	Dynamic	<input type="checkbox"/>
2	21	00-00-0C-07-AC-1E	1	Dynamic	<input type="checkbox"/>
3	21	00-00-E2-58-4E-F7	1	Dynamic	<input type="checkbox"/>
4	21	00-05-5D-07-36-72	1	Dynamic	<input type="checkbox"/>
5	21	00-05-5D-6B-08-85	1	Dynamic	<input type="checkbox"/>
6	21	00-08-C7-CB-CB-CC	1	Dynamic	<input type="checkbox"/>
7	21	00-0A-5E-5A-27-90	1	Dynamic	<input type="checkbox"/>
8	21	00-0C-29-1D-8C-9B	1	Dynamic	<input type="checkbox"/>
9	21	00-0C-29-3B-E9-CC	1	Dynamic	<input type="checkbox"/>
10	21	00-0C-29-86-39-DF	1	Dynamic	<input type="checkbox"/>
11	21	00-0C-29-97-FD-8C	1	Dynamic	<input type="checkbox"/>
12	21	00-0C-29-CB-77-AB	1	Dynamic	<input type="checkbox"/>
13	21	00-0C-6E-55-53-7E	1	Dynamic	<input type="checkbox"/>
14	21	00-0C-6E-5C-68-01	1	Dynamic	<input type="checkbox"/>
15	21	00-0C-6E-80-96-2A	1	Dynamic	<input type="checkbox"/>
16	21	00-0C-6E-AB-9B-60	1	Dynamic	<input type="checkbox"/>
17	21	00-0C-6E-AC-19-7E	1	Dynamic	<input type="checkbox"/>
18	21	00-0C-6E-D0-D3-F1	1	Dynamic	<input type="checkbox"/>
19	21	00-0C-6E-D5-5A-51	1	Dynamic	<input type="checkbox"/>
20	21	00-0C-6E-D5-5A-7E	1	Dynamic	<input type="checkbox"/>
21	21	00-0C-6E-D5-5C-01	1	Dynamic	<input type="checkbox"/>
22	21	00-0C-6E-EB-B0-15	1	Dynamic	<input type="checkbox"/>
23	21	00-0C-76-92-5F-C6	1	Dynamic	<input type="checkbox"/>
24	21	00-0C-76-B3-FC-26	1	Dynamic	<input type="checkbox"/>
25	21	00-0C-76-B3-FC-37	1	Dynamic	<input type="checkbox"/>

Page:

Figure 98 – Security &gt; MAC Address Table &gt; Dynamic Forwarding Table

**Security > DHCP Server Screening > DHCP Server Screening Port Settings**

DHCP Server Screening function allows you to restrict the illegal DHCP server by discarding the DHCP service from distrusted ports. This page allows you to configure the DHCP Server Screening state for each port. Select **From Port**, **To Port** and **State** and then click **Apply** to enable or disable the function. The default setting is **Disabled**.

DHCP Server Screening Port Settings


From Port:  To Port:  State:

Port	State
1	Disabled
2	Disabled
3	Disabled
4	Disabled
5	Disabled
6	Disabled
7	Disabled
8	Disabled
9	Disabled
10	Disabled
11	Disabled
12	Disabled
13	Disabled
14	Disabled
15	Disabled
16	Disabled
17	Disabled
18	Disabled
19	Disabled
20	Disabled
21	Disabled
22	Disabled
23	Disabled
24	Disabled
25	Disabled
26	Disabled
27	Disabled
28	Disabled

Figure 99 – Security &gt; DHCP Server Screening &gt; DHCP Server Screening Port Settings

**Monitoring > Statistics**

The Statistics screen displays the status of each port packet count.

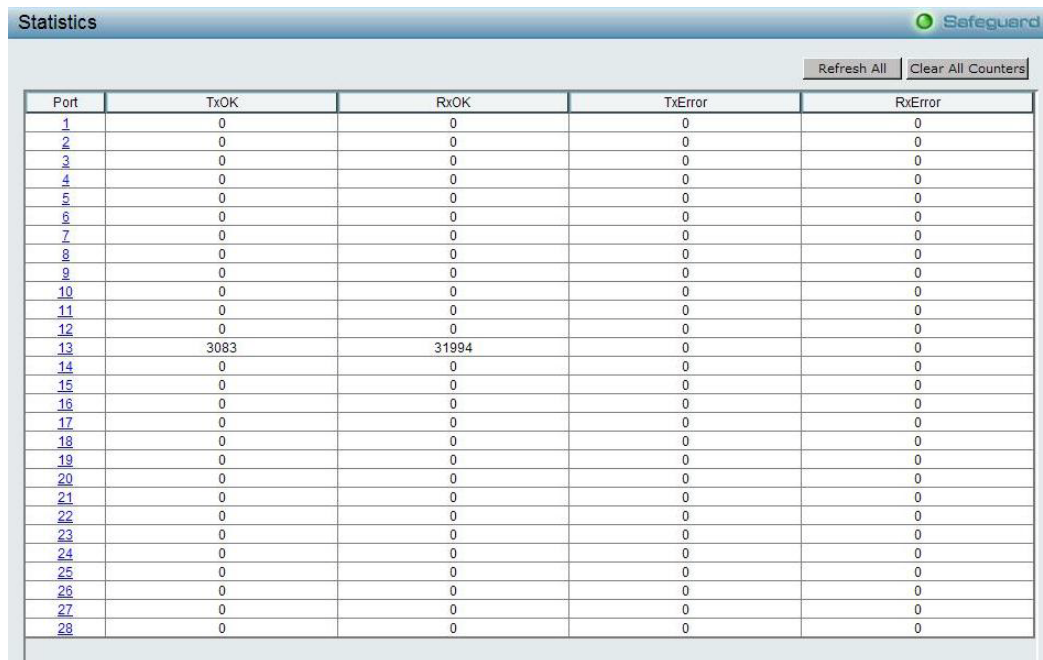

Port	TxOK	RxOK	TxError	RxError
1	0	0	0	0
2	0	0	0	0
3	0	0	0	0
4	0	0	0	0
5	0	0	0	0
6	0	0	0	0
7	0	0	0	0
8	0	0	0	0
9	0	0	0	0
10	0	0	0	0
11	0	0	0	0
12	0	0	0	0
13	3083	31994	0	0
14	0	0	0	0
15	0	0	0	0
16	0	0	0	0
17	0	0	0	0
18	0	0	0	0
19	0	0	0	0
20	0	0	0	0
21	0	0	0	0
22	0	0	0	0
23	0	0	0	0
24	0	0	0	0
25	0	0	0	0
26	0	0	0	0
27	0	0	0	0
28	0	0	0	0

Figure 100 – Monitoring > Statistics

**Refresh All:** Renews the details collected and displayed.

**Clear All Counters:** To reset the details displayed.


**TxOK:** Number of packets transmitted successfully.

**RxOK:** Number of packets received successfully.

**TxError:** Number of transmitted packets resulting in error.

**RxError:** Number of received packets resulting in error.

To view the statistics of individual ports, click one of the linked port numbers for details.

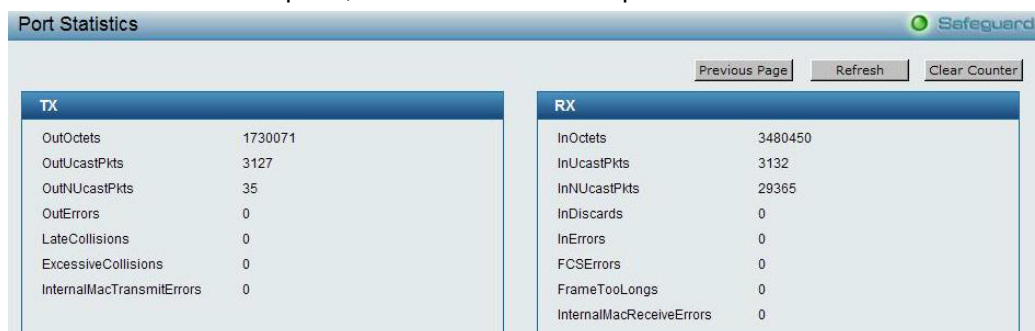

TX		RX	
OutOctets	1730071	InOctets	3480450
OutUcastPkts	3127	InUcastPkts	3132
OutNUcastPkts	35	InNUcastPkts	29365
OutErrors	0	InDiscards	0
LateCollisions	0	InErrors	0
ExcessiveCollisions	0	FCSErrors	0
InternalMacTransmitErrors	0	FrameTooLongs	0
		InternalMacReceiveErrors	0

Figure 101 – Monitoring > Port Statistics

**Previous Page:** Go back to the Statistics main page.

**Refresh:** To renew the details collected and displayed.

**Clear Counter:** To reset the details displayed.



### Monitoring > Cable Diagnostics

The Cable Diagnostics is designed primarily for administrators and customer service representatives to examine of the copper cable quality. It rapidly determines the type of cable errors occurred in the cable.

Select a port and then click the **Test Now** button to start the diagnosis.

Port: 01 [Test Now]

Port	Test Result	Cable Fault Distance (meters)	Cable Length (meters) [in range]
<p>The cable diagnostics feature is designed primarily for administrators or customer service representatives to verify and test copper cables; it can rapidly determine the quality of the cables and the types of error.</p> <p><b>Note:</b></p> <ol style="list-style-type: none"> <li>1. Before enabling Cable Diagnostics function, please be sure to disable Power Saving via the Power Saving configuration of Web GUI.</li> <li>2. If cable length is displayed as "N/A" it means the cable length is "Not Available". This is due to the port being unable to obtain cable length/either because its link speed is 10M or 100M, or the cables used are broken and/or bad in quality.</li> <li>3. The deviation of "Cable Fault Distance" is +/-2 meters, therefore No cable may be displayed under Test Result, when the cable used is less than 2 m in length.</li> <li>4. It also measures cable fault and identifies the fault in length according to the distance from this switch.</li> </ol>			

Figure 102 – Monitoring > Cable Diagnostic

**Test Result:** The description of the cable diagnostic results.

- **OK** means the cable is good for the connection.
- **Short in Cable** means the wires of the RJ45 cable may be in contact somewhere.
- **Open in Cable** means the wires of RJ45 cable may be broken or the other end of the cable is simply disconnected.
- **Test Failed** means some other errors occurred during cable diagnostics. Please select the same port and test again.

**Cable Fault Distance (meters):** Indicates the distance of the cable fault from the Switch port, if the cable is less than 2 meters, it will show "No Cable".

**Cable Length (meter):** If the test result shows OK, then cable length will be indicated for the total length of the cable. The cable lengths are categorized into four types: <50 meters, 50~80 meters, 80~100 meters and >100 meters.




**NOTE:** Cable length detection is effective on Gigabit ports only.



**NOTE:** If the port state of DES-1210-08P just changed from link up to link down, please wait 5 seconds to execute the cable diagnostic test or the test result might be incorrect.

### Monitoring > System Log

The System Log page provides information about system logs, including information when the device was booted, how the ports are operating, when users logged in, when sessions timed out, as well as other system information.

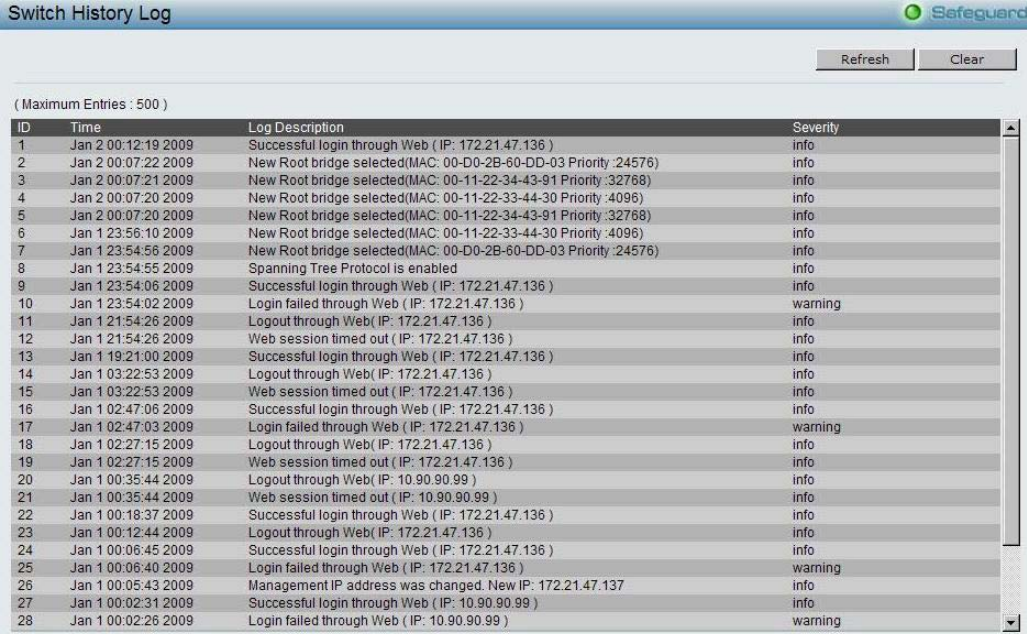

ID	Time	Log Description	Severity
1	Jan 2 00:12:19 2009	Successful login through Web ( IP: 172.21.47.136 )	info
2	Jan 2 00:07:22 2009	New Root bridge selected(MAC: 00-D0-2B-60-DD-03 Priority :24576)	info
3	Jan 2 00:07:21 2009	New Root bridge selected(MAC: 00-11-22-34-43-91 Priority :32768)	info
4	Jan 2 00:07:20 2009	New Root bridge selected(MAC: 00-11-22-33-44-30 Priority :4096)	info
5	Jan 2 00:07:20 2009	New Root bridge selected(MAC: 00-11-22-34-43-91 Priority :32768)	info
6	Jan 1 23:56:10 2009	New Root bridge selected(MAC: 00-11-22-33-44-30 Priority :4096)	info
7	Jan 1 23:54:56 2009	New Root bridge selected(MAC: 00-D0-2B-60-DD-03 Priority :24576)	info
8	Jan 1 23:54:55 2009	Spanning Tree Protocol is enabled	info
9	Jan 1 23:54:06 2009	Successful login through Web ( IP: 172.21.47.136 )	info
10	Jan 1 23:54:02 2009	Login failed through Web ( IP: 172.21.47.136 )	warning
11	Jan 1 21:54:26 2009	Logout through Web( IP: 172.21.47.136 )	info
12	Jan 1 21:54:26 2009	Web session timed out ( IP: 172.21.47.136 )	info
13	Jan 1 19:21:00 2009	Successful login through Web ( IP: 172.21.47.136 )	info
14	Jan 1 03:22:53 2009	Logout through Web( IP: 172.21.47.136 )	info
15	Jan 1 03:22:53 2009	Web session timed out ( IP: 172.21.47.136 )	info
16	Jan 1 02:47:06 2009	Successful login through Web ( IP: 172.21.47.136 )	info
17	Jan 1 02:47:03 2009	Login failed through Web ( IP: 172.21.47.136 )	warning
18	Jan 1 02:27:15 2009	Logout through Web( IP: 172.21.47.136 )	info
19	Jan 1 02:27:15 2009	Web session timed out ( IP: 172.21.47.136 )	info
20	Jan 1 00:35:44 2009	Logout through Web( IP: 10.90.90.99 )	info
21	Jan 1 00:35:44 2009	Web session timed out ( IP: 10.90.90.99 )	info
22	Jan 1 00:18:37 2009	Successful login through Web ( IP: 172.21.47.136 )	info
23	Jan 1 00:12:44 2009	Logout through Web( IP: 172.21.47.136 )	info
24	Jan 1 00:06:45 2009	Successful login through Web ( IP: 172.21.47.136 )	info
25	Jan 1 00:06:40 2009	Login failed through Web ( IP: 172.21.47.136 )	warning
26	Jan 1 00:05:43 2009	Management IP address was changed. New IP: 172.21.47.137	info
27	Jan 1 00:02:31 2009	Successful login through Web ( IP: 10.90.90.99 )	info
28	Jan 1 00:02:26 2009	Login failed through Web ( IP: 10.90.90.99 )	warning

Figure 103 – Monitoring &gt; System Log

**ID:** Displays an incremented counter of the System Log entry. The Maximum entries are 500.

**Time:** Displays the time in days, hours, and minutes the log was entered.

**Log Description:** Displays a description event recorded.

**Severity:** Displays a severity level of the event recorded.

Click **Refresh** to renew the page, and click **Clear** to clean out all log entries.

### ACL > ACL Configuration Wizard

Access Control List (ACL) allows you to establish criteria to determine whether or not the Switch will forward packets based on the information contained in each packet's header. These criteria can be specified on a basis of MAC address, or IP address.

The ACL Configuration Wizard will aid with the creation of access profiles and ACL Rules. The ACL Wizard will create the access rule and profile automatically. The maximum usable profiles are 50 and with 240 Rules in total for the switch.



**ACL Configuration Wizard**

General ACL Rules

From:

To:

Service Type:

Action:

Ports:

**Note:**  
 ACL Wizard will create the access profile and rule automatically.  
 For advanced access profile/rule setting, you can manually configure it in Access Profile List.

Figure 104 – ACL &gt; ACL Configuration Wizard

**From:** Specify the origin of accessible packets. The possible values are:



**Any** - Indicates ACL action will be on packets from any source.

**MAC Address** - Indicates ACL action will be on packets from this MAC address.

**IPv4 Addresses** - Indicates ACL action will be on packets from this IPv4 source address.

**To:** Specify the destination of accessible packets. The possible values are:

**Any** - Indicates ACL action will be on packets from any source.

**MAC Address** - Indicates ACL action will be on packets from this MAC address. The field of format is xx-xx-xx-xx-xx-xx.

**IPv4 Addresses** - Indicates ACL action will be on packets from this IPv4 source address.

**Service Type:** Specify the type of service. The possible values are:

**Any** - Indicates ACL action will be on packets from any service type.

**Ether type** - Specifies an Ethernet type for filtering packets.

**ICMP All** - Indicates ACL action will be on packets from ICMP packets.

**IGMP** - IGMP packets can be filtered by IGMP message type.

**TCP All** - Indicates ACL action will be on packets from TCP Packets.

**TCP Source Port** - Matches the packet to the TCP Source Port.

**TCP Destination Port** - Matches the packet to the TCP Destination Port.

**UDP All** - Indicates ACL action will be on packets from UDP Packets.

**UDP Source Port** - Matches the packet to the UDP Source Port.

**UDP Destination Port** - Matches the packet to the UDP Destination Port.

**Action:** Specify the ACL forwarding action matching the rule criteria. *Permit* is to forward packets if all other ACL criteria are met. *Deny* is to drop packets if all other ACL criteria is met.

**Port:** Enter a range of ports to be configured.

Press **Apply** for the settings to take effect.



**NOTE:** Once the ACL rules conflict, rules with smaller rule ID will take higher priority.



**NOTE:** Be careful when configuring ACL rules, an inappropriate may cause management access failed.

### **ACL > ACL Profile List**

The ACL Profile List provides information for configuring ACL Profiles manually. ACL profiles are attached to interfaces, and define how packets are forwarded if they match the ACL criteria.

Access Profile List <span>Safeguard</span>					
<div>Add ACL Profile</div> <div>Delete All</div>					
Profile ID	Owner Type	Profile Summary			
51	Voice VLAN	Source MAC	Show Details	Show Rules	Delete
52	ARP-SP	Source MAC, Ether Type, ARP Sender MAC, ARP Sender IP	Show Details	Show Rules	Delete
53	ARP-SP	Ether Type, ARP Sender IP	Show Details	Show Rules	Delete
56	Surveillance VLAN	Source MAC	Show Details	Show Rules	Delete
<div>Current/Max. Profile: 0/50, Current/Max. Rule: 0/240</div>					

**Figure 105 – ACL > ACL Profile List**

The contents of Access Profile List table include:

**Profile ID:** Indicates the profile Identification number. The possible configured profile IDs are 1~50, and profile ID 51 is reserved for Voice VLAN.

**Owner Type:** The owner type of ACL profile; it can be normal ACL, Voice VLAN, Auto Surveillance VLAN or ARP Spoofing Protection.

**Profile Summary:** Displays the profile summary.

**Show Details:** To display an ACL's profile details. The ACL profile details are displayed below the ACL table.

**Show Rules:** To show the access rule in this profile.

**Edit / New Rules:** To edit or create an access rule in this profile. To add a new rule, please see **Access Rule List** in the next section.

**Delete:** To delete an access profile.

To manually add a profile, click **Add ACL Profile**:

Figure 106 – Add Access Profile

The steps of adding an access profile is like below:


1) After selecting the **Profile ID** and **Frame Type** (MAC or IPv4), specify attributes like Untagged/Tagged (for MAC), or ICMP/IGMP/TCP/UDP (for IPv4), then click *Select* and a simplified frame diagram will be displayed.

2) Select the field of interest and related columns will be displayed in lower part of the page. Enter the filtering mask and click **Create** when done. A filtering mask is to specify the digit that you want to check. For example, if you want to check a network of 192.168.1.0/24, then you should enter the IP mask as 255.255.255.0.



**NOTE:** You cannot select Payload in a MAC ACL, or L2 Header in IP ACL.

3) After the **Profile ID** has been created, it will go back to the main Access Profile List page, clicking the **Edit / New Rules** button to enter **Access Rule List** page.

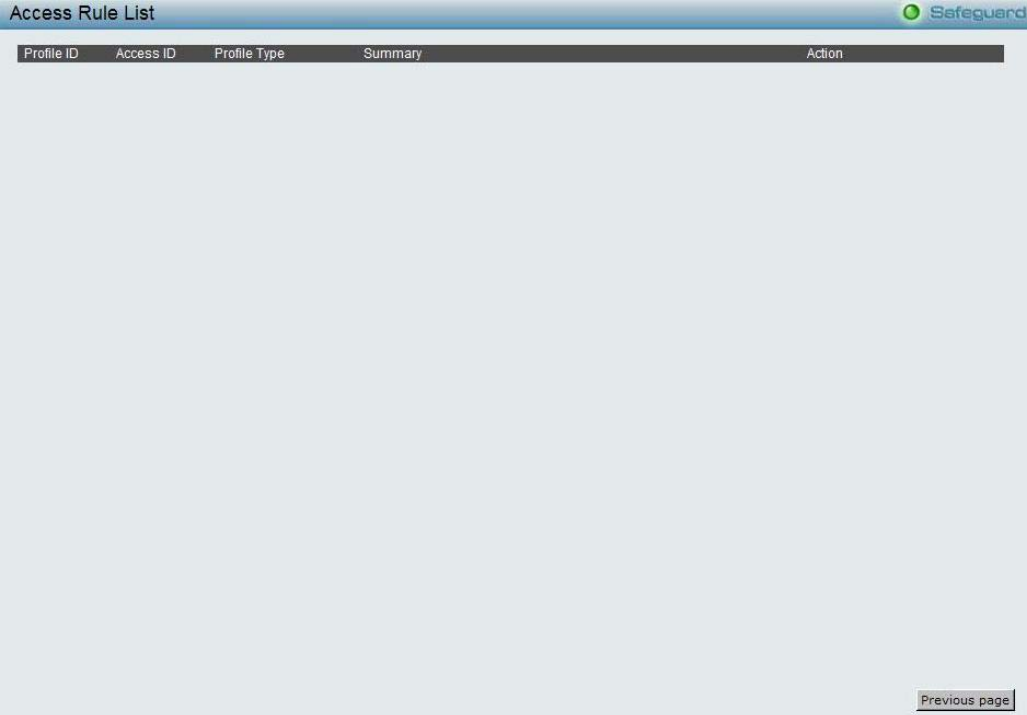

Profile ID	Access ID	Profile Type	Summary	Action
------------	-----------	--------------	---------	--------

Previous page

Figure 107 – Access Rule List

**Profile ID:** Indicates the corresponding access profile Identification number.

**Access ID:** Indicates the access rule Identification number.

**Profile Type:** Displays the profile type.

**Summary:** Displays the access rule summary.

**Action:** Displays the access rule action.

To add a new rule, click **Add Rule:**



**Add Access Rule**

**Profile Information**

Profile ID: 01

IP Protocol: ICMP

Source IP: 255.255.255.224

---

**Rule Detail**

(Keep an input field as blank to treat the corresponding option as "don't care")

Access ID:

Type: IP

Source IP Address:     ex:(192.168.1.10)

IP Protocol: ICMP

Ports:  ex:(1,2,4-6)

Action:

Previous page Apply

Figure 108 – Add Access Rule

**Profile Information** displays the information to which the rule is being added to, including **Profile ID** and other fields specified.

In **Rule Detail**, you can specify the details of an access rule. Below is all the possible parameters can be set.

**Access ID:** Specify the Access ID (1-65535).

**Type:** Display the type of rule.

**VLAN ID:** The VLAN ID for a previously configured VLAN.

**Destination MAC Address:** Specify the Destination MAC address, the field of format is xx-xx-xx-xx-xx-xx.

**Source MAC Address:** Specify the Source MAC address, the field of format is xx-xx-xx-xx-xx-xx.

**802.1p:** Specify the 802.1p priority value.

**Ether Type:** Specify the Ethernet Type value.

**Destination IP Address:** Specify the Destination IP address.

**Source IP Address:** Specify the Source IP address.

**DSCP:** Specify the DSCP value.

**IP Protocol:** The L4 protocol above IP. Possible values are ICMP, IGMP, TCP, and UDP.

**ICMP Type:** Specify the ICMP packet type.

**ICMP Code:** Specify the ICMP packet Code.

**IGMP Type:** Specify the IGMP packet type.

**Source Port:** Specify the TCP or UDP source port value.

**Destination Port:** Specify the TCP or UDP destination port value.

**TCP Flag:** Specify the TCP flag value.

**Ports:** Specify the switch ports that you want to implement the access rule to.

**Action:** Specify the ACL forwarding action matching the rule criteria. **Permit** is to forward packets if all other ACL criteria are met. **Deny** is to drop packets if all other ACL criteria is met.

Click **Apply** to make it effective.



**NOTE:** The switch proceeds the access rule from the smallest access ID, so be careful in assigning the ID for the expected results.

To modify an existing rule, please click on the Access ID hyperlink.

Profile ID	Access ID	Profile Type	Summary	Action
1	25	IP	ICMP_Source IP	Permit

Figure 109 – ACL > Access Profile List > Access Rule List

### ACL > ACL Finder

This page is used to help find a previously configured ACL entry. To search for an entry, enter the profile ID from the drop-down menu, select a port that you wish to view, define the state and click **Find**. The table on the lower half of the screen will display the entries. To delete an entry click the corresponding **Delete** button.

Profile ID	Access ID	Profile Type	Summary	Action
------------	-----------	--------------	---------	--------

Figure 110 – ACL > ACL Finder

### PoE > PoE Port Settings (Only for DES-1210-08P/28P)

DES-1210-08P/28P supports Power over Ethernet (PoE) as defined by the IEEE specification. All ports of DES-1210-08P and port 5-24 of DES-1210-28P comply with IEEE 802.3af providing up to 15.4watts of power to Powered Devices (PD), and port 1-4 of DES-1210-28P comply with IEEE 802.3at providing up to 30watts of power to PDs. Both devices follow PSE (Power Supply Equipment) standard pinout Alternative A, feeding PoE power through pins 1, 2, 3 and 6 of Category 5/5e or Category 3 UTP Ethernet cables.

As per the IEEE 802.3af/at standard, the PSE provides power according to the following classification:

Class	Usage	Maximum power used by PD
0	Default	15.4W

1	Optional	4.0W
2	Optional	7.0W
3	Optional	15.4W
4	Reserved	15.4W~30W

As seen in the following figure, the PoE port table displays the PoE status including, **Port Enable**, **Time Range**, **Priority**, **Power Limit**, **Power(W)**, **Voltage(V)**, **Current(mA)**, **Classification** and **Port Status**. You can select **From Port** / **To Port** to control the PoE functions of a port. DES-1210-08P/28P will auto disable the ports if the power of a ports is over current, while the other ports stay active.



**NOTE:** The PoE Status information Power Voltage and Current is the power usage information of the connected PD; please click **Refresh** to renew the information.

**PoE Port Settings** Safeguard

From Port: 1 To Port: 24 State: Enabled Time Range: N/A Priority: Normal Power Limit: Auto User Define: ☐ (1.0~30.0w)

Port	State	Time Range	Priority	Power Limit	Power (W)	Voltage (V)	Current (mA)	Classification	Status
1	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
2	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
3	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
4	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
5	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
6	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
7	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
8	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
9	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
10	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
11	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
12	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
13	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
14	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
15	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
16	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
17	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
18	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
19	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
20	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
21	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
22	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
23	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF
24	Enabled	N/A	Normal	Auto	0.0	0.0	0.0	N/A	POWER OFF

**Note :**

1. The port 1 to port 4 can be set a power limit between 1W and 30W. Max power used by PSE: Class 1: 4W, Class 2: 7W, Class 3: 15.4W, Class 4: 30W.
2. The port 5 to port 24 can be set a power limit between 1W and 15.4W. Max power used by PSE: Class 1: 4W, Class 2: 7W, Class 3: 15.4W, Class 4: option.

Figure 111 – PoE > PoE Port Settings

**State:** Select to enable or disable the PoE function of ports.

**Time Range:** Select a configured time range profile to auto enable or disable the PoE function for corresponding ports.

**Priority:** Port priority determines the priority of the power supplied to the ports. When multiple ports are configured for the same priority, the lower port ID has higher priority.

**Power Limit:** This function allows you to manually set the port power current limitation to be given to the PD. To protect DES-1210-08P/28P and the connected devices, the power limit function will disable the PoE function of the port when the power is overloaded. Select from **Class 1**, **Class 2**, **Class 3**, **Class4** or **Auto** for the power limit. Auto setting negotiates and follows the classification for the PD power current based on the 802.3af and 802.3at standard. **Class4** is only available for ports 1-4.

**User Define:** User can manually define the power limit for each port. The port power range of each device is:

Model	Port	Maximum Power
DES-1210-08P	1~8	15.4Watts
DES-1210-28P	1~4	30.0Watts
DES-1210-28P	5~24	15.4Watts

### PoE > PoE System Settings (Only for DES-1210-08P/28P)

This page allows you to configure the global PoE settings of the device and also displays current PoE status including **System Budget Power**, **Support Total Power**, **Remainder Power**, and **The ratio of system power supply**.

Figure 112 – PoE > PoE System Settings

**System Power Threshold:** To configure the maximum power for PoE function. The maximum PoE threshold of each device is:

Model	Maximum Power
DES-1210-08P	72Watts
DES-1210-28P	193Watts

**System Setting Disconnect Method:** Select a method to shut down the PoE port function, when the total power requested is higher than the system power budget.

**Deny next port** - When the power budget is exceeded, the next port attempting to power up is denied, regardless of the port priority.

**Deny low priority port** - The port with the lower priority will be shut down to allow the higher priority port to power up.

### Time-Based PoE > Time Range Settings (Only for DES-1210-08P/28P)

Time-based PoE optimization feature on the switches turns PoE on or off based on a schedule to save power. The power supply to the PoE devices can be disabled when not in use, for example during nights and weekends. This page allows you to configure the time range profiles for the time based PoE function.

Figure 113 – Time-Based PoE > Time Range Settings



**Range Name:** Enter the name of the time profile.

**Date:** Specify the start date and end date of this time range profile.

**Hours (HH:MM):** Specify the start time and end time of this time range profile. If the configured end time is before the start time, the time range will end the following day.

**Weekdays:** Specify the weekdays' time range profile.

### **LLDP > LLDP Global Settings (Only for DES-1210-08P/28P)**

LLDP (Link Layer Discovery Protocol) supports an IEEE 802.1AB standard-based method for switches. This function allows the switches to advertise themselves to the neighboring devices and learn about the neighboring LLDP devices. The Switch will store that information in the Management Information Base (MIB); SNMP utilities can learn about the network topology by getting the MIB information from each LLDP device.

Figure 114 – LLDP > LLDP Global Settings

**LLDP State:** Select **Enable** or **Disable** and then click **Apply** to turn on/off the LLDP function. By default, the LLDP state is **Enabled**.

**Message TX Hold Multiplier (2-10):** Set the **Time-to-Live** for the LLDP advertisements transmitted. If the **Time-to-Live** of LLDP advertisements expire, the advertised data will be deleted from the neighboring Switch's MIB. The default value is **4 hops**.

**Message TX Interval (5-32768):** Set the time interval to transmit the LLDP advertisement. The default value is **30 seconds**.

**LLDP Reinit Delay(1-10):** Enter a time delay for the LLDP port. This LLDP port will wait for a specific interval before it re-initializes.

**LLDP TX Delay(1-8192):** Configure the minimum time delay interval for any LLDP port which transmits successive LLDP advertisements due to changes in the LLDP MIB content. The default value is 2 seconds.

### **LLDP > LLDP Remote Port Information (Only for DES-1210-08P/28P)**

This page displays the port information learned from LLDP neighbors. Select a port and click **Find** to display the LLDP neighbor's information.

Figure 115 – LLDP > LLDP Remote Port Information

To view the settings for a remote port, click **Show Normal** and the following page displays.



LLDP Remote Port Information	
LLDP Remote Entity Information Table	
Total Entries: 1	
Entity	Information
Chassis ID Subtype	macAddress
Chassis ID	00-1E-58-4F-F7-D0
Port ID Subtype	local
Port ID	1/16
Port Description	
System Name	
System Description	

Figure 116 – LLDP &gt; LLDP Remote Port Information

Click << **Back** to return to the previous page.

### **LLDP > LLDP-MED Settings (Only for DES-1210-28P)**

LLDP-MED (Link Layer Discovery Protocol-Media Endpoint Discovery) is an enhancement of LLDP. It improves the LLDP operation between endpoint devices such as IP phones and APs. LLDP-MED supports features such as Auto-discovery of LAN policies and device location discovery. Currently, DES-1210-28P supports only the extended and automated power management of PoE end points for 802.3at ports (ports 1~4).

This page allows you to configure the **Power PSE TLV** (Type-length-value) state of 802.3at ports. Select **From Port** / **To Port** and **Enable** / **Disable** and then click **Apply** to turn on/off the **Power PSE TLV** transmission.

LLDP MED Settings		
LLDP-MED Power PSE TLV Setting		
From Port	To Port	Power PSE TLV
1	4	Disable
		Apply Refresh
Port	Power PSE TLV	
1	Enabled	
2	Enabled	
3	Enabled	
4	Enabled	

Figure 117 – LLDP &gt; LLDP-MED Settings

## 6 Command Line Interface

The D-Link Web Smart Switch allows a computer or terminal to perform some basic monitoring and configuration tasks by using the Command Line Interface (CLI) via TELNET protocol.

### ***To connect a switch via TELNET:***

1. Make sure the network connection between the switch and PC is active.
2. To connect, launch any terminal software like **HyperTerminal** in Microsoft Windows, or just use the command prompt by typing the command *telnet* followed by the switch IP address, eg. *telnet 10.90.90.90*.
3. The logon prompt will appear.

### ***Logging on to the Command Line Interface:***

Enter your User Name and Password to log in. The default user name and password is **admin**. Note that the user name and password are case-sensitive. Press **Enter** in both the Username and Password fields. The command prompt will appear as shown below (**DES-1210-28P>**):

```
DES-1210-28P login: admin
Password:
DES-1210-28P>
```

Figure 118 – Command Prompt

The user session is automatically terminated if idle for the login timeout period. The default login timeout period is 5 minutes. To change the login timeout session please refers to chapter 5.

### ***CLI Commands:***

There are a number of helpful features included in the CLI. Enter the **? command** will display a list of commands.

```
DES-1210-28P> ?
USEREXEC commands :
  config account admin password <passwd>
  config ipif System { ipaddress <ip-address> <subnet-mask> gateway <gw-
address> | dhcp }
  debug info
  download { firmware_fromTFTP tftp://ip-address/filename | cfg_fromTFTP
tftp://ip-address/filename }
  logout
  ping <ip_addr> [times <integer (1-255)>] [timeout <integer (1-99)>]
  reboot
  reset config
  save
  show ipif
  show switch
  upload { firmware_toTFTP tftp://ip-address/filename | cfg_toTFTP
tftp://ip-address/filename }
DES-1210-28P>
```

Figure 119 – The ? command

### **Download**

The **download** command is used to download and install new firmware or a Switch configuration file from a TFTP server.

#### **Syntax**

```
download { firmware_fromTFTP tftp://ip-address/filename | cfg_fromTFTP
tftp://ip-address/filename }
```

#### **Parameters**

Parameter	Description
-----------	-------------

<code>firmware_fromTFTP</code>	Download and install new firmware on the Switch from a TFTP server.
<code>cfg_fromTFTP</code>	Download a switch configuration file from a TFTP server.
<code>tftp://ip-address/</code>	The IP address of the TFTP server.
<code>filename</code>	The filename of the firmware or switch configuration file on the TFTP server. You need to specify the DOS path if the file is not at the root directory of the TFTP server.



**Note:** Switch will reboot after restore and all current configurations will be lost

## Upload

The **upload** command is used to upload the firmware file or a Switch configuration file to a TFTP server.

### Syntax

```
upload { firmware_toTFTP tftp://ip-address/filename | cfg_toTFTP
tftp://ip-address/filename }
```

### Parameters

Parameter	Description
<code>firmware_toTFTP</code>	Upload the firmware on the Switch from a TFTP server.
<code>cfg_toTFTP</code>	Specifies that the Switch's current settings will be uploaded to the TFTP server.
<code>tftp://ip-address/</code>	The IP address of the TFTP server.
<code>filename</code>	The filename of the firmware or switch configuration file on the TFTP server. You need to specify the DOS path if the file is not at the root directory of the TFTP server.

## Config ipif system

The **config ipif system** command sets the IP address of the switch.

### Syntax

```
config ipif system { ipaddress <ip-address> <subnet-mask> gateway <gw-
address> | dhcp }
```

### Parameter

Parameter	Description
<code>ipaddress &lt;ip-address&gt; &lt;subnet-mask&gt;</code>	The IP address and subnet mask to be created. Users need to specify the address and mask information using the traditional format (for example, 10.1.2.3/255.0.0.0).
<code>gateway &lt;gw-address&gt;</code>	The IP address of the router or gateway.
<code>dhcp</code>	Allows the selection of the DHCP protocol for the assignment of an IP address to the Switch's System IP interface.

### Example

```
DES-1210-28P> config ipif system ipaddress 172.17.5.214 255.255.255.0
gateway 172.17.5.214
% The IP setting mode change to static will cause CLI disconnect.
```

Figure 120 – The config ipif system command

**Logout**

This command closes the current connection.

**Syntax**

logout

**Example**

```
DES-1210-28P> logout
```

Figure 121 – The logout command

**Ping**

This command checks if another IP address is reachable on the network. You can ping the IP address connected to through the managed VLAN (VLAN 1 by default), as long as there is a physical path between the switch and the target IP equipment. By default, Switch sends five pings to the target IP.

**Syntax**

ping <ipaddr> [times <integer (1-255)>] [timeout <integer (1-99)>]

**Parameter**

Parameter	Description
<ipaddr>	The IP address of the target station.
times <integer (1-255)>	Specify how many ping requests will be sent to the target IP address.
timeout <integer (1-99)>	Specify the timeout interval waiting the ping reply for target IP address.

**Example**

```
DES-1210-28P> ping 10.90.90.91 times 3 timeout 1
Reply Received From :10.90.90.91, TimeTaken : 20 msecs
Reply Received From :10.90.90.91, TimeTaken : 20 msecs
Reply Received From :10.90.90.91, TimeTaken : 20 msecs

--- 10.90.90.91 Ping Statistics ---
3 Packets Transmitted, 3 Packets Received, 0% Packets Loss
DES-1210-28P>
```

Figure 122 – The ping command



**Note:** DES-1210-08P does not support times and timeout configurations.

**Reboot**

This command reboots the system. All network connections are terminated and the boot code executes.

**Syntax**

reboot

**Example**

```
DES-1210-28P> reboot
% Device will reboot, please wait a few minutes to re-login.
DES-1210-28P>
```

Figure 123 – The reboot command

**Reset**

All configurations will be reset to the default settings.

**Syntax**

**reset config**

**Example**

```
DES-1210-28P> reset config
% Device will reboot after reset configuration successfully.
DES-1210-28P>
```

Figure 124 – The reset config command

**Show ipif**

The command displays the current IP address of the switch.

**Syntax**

**show ipif**

**Example**

```
DES-1210-28P> show ipif
IP Setting Mode           : Static
IP Address                : 172.17.5.214
Subnet Mask               : 255.255.255.0
Default Gateway           : 172.17.5.254

DES-1210-28P>
```

Figure 125 – The show ipif command

**Show switch**

The command displays the status of the switch.

**Syntax**

**show switch**

**Example**

```
DES-1210-28P> show switch
System name               :
System Contact            :
System Location           :
System up time            : 0 days, 6 hrs, 32 min, 17 secs
System Time               : 01/01/2009 06:32:19
System hardware version   : A1
System firmware version   : 1.00.001
System boot version       : 1.00.000
System Protocol version   : 2.001.004
System serial number      : 1MB1733K0000A
MAC Address               : 00-18-E7-48-85-50

DES-1210-28P>
```

Figure 126 – The show switch command

**Config account admin password**

The command sets the administrator password.

**Syntax**

**config account admin password <passwd>**

**Parameter**

Parameter	Description
<passwd>	The new password of the administrator.

**Example**

```
DES-1210-28P> config account admin password admin
DES-1210-28P>
```

Figure 127 – The config account admin password command

**Save**

The command saves the configuration changes to the memory.

**Syntax**

**save**

**Example**

```
DES-1210-28P> save
Building configuration ...
[OK]
DES-1210-28P>
```

Figure 128 – The save command

**Debug info**

This command displays the ARP table and MAC FDB of the Switch.

**Syntax**

**debug info**

**Example**

```
DES-1210-28P> debug info
% ARP table :

Address                Hardware Address    Type   Interface  Mapping
-----                -
172.17.5.85            00:18:8b:bf:75:30   ARPA   vlanMgmt   Dynamic
172.17.5.254          00:19:5b:14:3d:c4   ARPA   vlanMgmt   Dynamic

% MAC table :

Vlan    Mac Address                Type   Ports
----    -
1       00:00:00:00:00:26          Learnt Fa0/4
1       00:00:48:bf:f3:01          Learnt Fa0/4
1       00:03:1b:66:66:5c          Learnt Fa0/4
1       00:03:64:00:01:23          Learnt Fa0/4
1       00:0d:60:cb:6e:5d          Learnt Fa0/4
1       00:0e:7b:a0:12:97          Learnt Fa0/4
1       00:0f:3d:a8:88:9b          Learnt Fa0/4
1       00:0f:ea:f0:0e:1e          Learnt Fa0/4
1       00:10:db:73:68:31          Learnt Fa0/4
1       00:11:25:2c:43:c6          Learnt Fa0/4
1       00:11:25:43:38:83          Learnt Fa0/4

Total Mac Addresses displayed: 11
DES-1210-28P>
```

Figure 129 – The debug info command

---

## ***Appendix A - Ethernet Technology***

---

This chapter will describe the features of the D-Link Web Smart Switch and provide some background information about Ethernet/Fast Ethernet/Gigabit Ethernet switching technology.

### ***Gigabit Ethernet Technology***

---

Gigabit Ethernet is an extension of IEEE 802.3 Ethernet utilizing the same packet structure, format, and support for CSMA/CD protocol, full duplex, and management objects, but with a tenfold increase in theoretical throughput of over 100-Mbps Fast Ethernet and a hundredfold increase over 10-Mbps Ethernet. Since it is compatible with all 10-Mbps and 100-Mbps Ethernet environments, Gigabit Ethernet provides a straightforward upgrade without wasting existing investments in hardware, software, or trained personnel.

The increased speed and extra bandwidth offered by Gigabit Ethernet is essential to help solving network bottlenecks that frequently develop as more advanced computer users and newer applications continue to demand greater network resources. Upgrading key components, such as backbone connections and servers to Gigabit Ethernet technology can greatly improve network response times as well as significantly speed up the traffic between subnets.

Gigabit Ethernet enables fast optical fiber connections to support video conferencing, complex imaging, and similar data-intensive applications. Likewise, since data transfers occur 10 times faster than Fast Ethernet, servers outfitted with Gigabit Ethernet NIC's are able to perform 10 times the number of operations in the same amount of time.

In addition, the phenomenal bandwidth delivered by Gigabit Ethernet is the most cost-effective method to take advantage of today and tomorrow's rapidly improving switching and routing internetworking technologies. And with expected advances in the coming years in silicon technology and digital signal processing that will enable Gigabit Ethernet to eventually operate over unshielded twisted-pair (UTP) cabling, outfitting your network with a powerful 1000-Mbps-capable backbone/server connection which will create a flexible foundation for the next generation of network technology products.

### ***Fast Ethernet Technology***

---

The growing importance of LANs and the increasing complexity of desktop computing applications are fueling the need for high performance networks. A number of high-speed LAN technologies have been proposed to provide greater bandwidth and improve client/server response times. Among them, 100BASE-T (Fast Ethernet) provides a non-disruptive, smooth evolution from the current 10BASE-T technology. The non-disruptive and smooth evolution nature, and the dominating potential market base, virtually guarantees cost-effective and high performance Fast Ethernet solutions.

100Mbps Fast Ethernet is a standard specified by the IEEE 802.3 LAN committee. It is an extension of the 10Mbps Ethernet standard with the ability to transmit and receive data at 100Mbps, while maintaining the CSMA/CD Ethernet protocol. Since the 100Mbps Fast Ethernet is compatible with all other 10Mbps Ethernet environments, it provides a straightforward upgrade and utilizes existing investments in hardware, software, and personnel training.

### ***Switching Technology***

---

Another approach to push beyond the limits of Ethernet technology is the development of switching technology. A switch bridges Ethernet packets at the MAC address level of the Ethernet protocol transmitting among connected Ethernet or Fast Ethernet LAN segments.

Switching is a cost-effective way of increasing the total network capacity available to users on a local area network. A switch increases capacity and decreases network loading by dividing a local area network into different segments which won't compete with each other for network transmission capacity.

The switch acts as a high-speed selective bridge between the individual segments. The switch, without interfering with any other segments, automatically forwards traffic that needs to go from one segment to another. By doing this the total network capacity is multiplied, while still maintaining the same network cabling and adapter cards.



## Appendix B - Technical Specifications

### Hardware Specifications

#### Key Components / Performance

- Switching Capacity:
  - DES-1210-08P : 1.6Gbps
  - DES-1210-28: 12.8Gbps
  - DES-1210-52: 17.6Gbps
  - DES-1210-28P: 12.8Gbps
- Max. Forwarding Rate
  - DES-1210-08P: 1.19Mpps
  - DES-1210-28: 9.5Mpps
  - DES-1210-52: 13.1Mpps
  - DES-1210-28P: 9.5Mpps
- Forwarding Mode: Store and Forward
- Packet Buffer memory: 256K Bytes
- DDRII for CPU: 64M Bytes
- Flash Memory: 16M Bytes

#### Port Functions

- 8, 24 or 48 10/100BaseT ports comply with the following standards:
  - IEEE 802.3
  - IEEE 802.3u
  - IEEE 802.3af (DES-1210-08P/28P only)
  - IEEE 802.3at (DES-1210-28P only)
  - Supports Full-Duplex operations
- 4 1000Base-T ports of DES-1210-28/28P/52 comply with the following standards:
  - IEEE 802.3
  - IEEE 802.3u
  - IEEE 802.3ab
  - Supports Full-Duplex operations
- 2 combo SFP ports of DES-1210-28/28P/52 comply with the following standards:
  - IEEE 802.3z
  - Supports Full-Duplex operations
- SFP transceivers supported
  - DEM-310GT (1000BASE-LX, 10km)
  - DEM-311GT (1000BASE-SX, 550m)
  - DEM-314GT (1000BASE-LH, 50km)
  - DEM-315GT (1000BASE-ZX, 80km)
  - DEM-312GT2 (1000BASE-SX, 2km)
  - DEM-210 (100BASE-FX, 15km)
  - DEM-211 (100BASE-FX, 2km)
- WDM Transceivers Supported:
  - DEM-330T (1000Base-BX,TX-1550/RX-1310nm, 10km)
  - DEM-330R (1000Base-BX,TX-1310/RX-1550nm, 10km)

- DEM-331T (1000Base-BX,TX-1550/RX-1310nm, 40km)
- DEM-331R (1000Base-BX,TX-1310/RX-1550nm, 40km)
- DEM-220T (100Base-BX, TX-1550/RX-1310nm, 20km)
- DEM-220R (100Base-BX, TX-1310/RX-1550nm, 20km)

#### Physical & Environment

- AC input, 100~240 VAC, 50/60Hz, internal universal power supply
- Acoustic Value:
  - DES-1210-08P/28/52: 0dB (Fan-less)
  - DES-1210-28P: 48.5dB (Fans run at high Speed), 45.2dB (Fans run at low speed).
- Operation Temperature:
  - DES-1210-08P/28/28P/52: 0~40°C
- Storage Temperature -10~70°C
- Operation Humidity:
  - DES-1210-08P/28/28P/52: 10~95% RH
- Storage Humidity:
  - DES-1210-08P/28/28P/52: 5%~95% RH

#### Emission (EMI) Certifications

- FCC class A
- CE Class A
- VCCI Class A

#### Safety Certifications

- cUL, LVD

### Features

#### L2 Features

- Supports up to 8K MAC address
- IGMP snooping: supports 256 multicast group
- 802.1D Spanning Tree
- 802.1w Rapid Spanning Tree
- Loopback Detection
- 802.3ad Link Aggregation:
  - DES-1210-08p: Up to 4 groups per device, up to 4 ports per group
  - DES-1210-28/28P/52: Up to 8 groups per device, up to 8 ports per group
- Port mirroring
- Multicast Filtering

#### VLAN

- 802.1Q VLAN standard (VLAN Tagging)

- Up to 256 static VLAN groups
- Asymmetric VLAN
- Management VLAN
- Auto-Voice VLAN

### **QoS (Quality of Service)**

- 802.1p priority, DSCP priority queue mapping
- Up to 4 queues per port
- Supports Strict / WRR mode in queue handling
- Bandwidth Control

### **Security**

- 802.1X port-based access control
- Port Security
- IP and MAC ACL
- Broadcast Storm Control
- D-Link Safeguard Engine
- Trusted Host
- ARP Spoofing Prevention
- DHCP Server Screening
- SSL

### **Green**

- Time-based PoE (DES-1210-08P/28P only)

### **Management**

- Web-based GUI or SmartConsole Utility
- D-Link proprietary CLI
- SNMP support
- DHCP client
- DHCP Auto Configuration
- LLDP(DES-1210-08/28P only)
- LLDP-MED (DES-1210-28P only)
- Trap setting for destination IP, system events, fiber port events, twisted-pair port events
- Port access control
- Web-based configuration backup / restoration
- Web-based firmware backup/restore
- Firmware upgrade using SmartConsole Utility & Web-based management
- Reset, Reboot

## ***Appendix C – Rack mount Instructions***

---

Safety Instructions - Rack Mount Instructions - The following or similar rack-mount instructions are included with the installation instructions:

- A) Elevated Operating Ambient - If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (Tma) specified by the manufacturer.
- B) Reduced Air Flow - Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.
- C) Mechanical Loading - Mounting of the equipment in the rack should be such that a hazardous condition is not achieved due to uneven mechanical loading.
- D) Circuit Overloading - Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.
- E) Reliable Earthing - Reliable earthing of rack-mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g. use of power strips).

**D-Link<sup>®</sup>**  
Building Networks for People