

**INCLUDES 2  
POWERLINE AV  
ADAPTERS**



## POWERLINE HOMEPLUG AV STARTER KIT

### **SIMPLE SETUP**



Simply plug it directly into a free power outlet; no extra cables are needed

### **RAPID SPEEDS OVER ELECTRICAL WIRING**

Speeds of up to 200 Mbps over home electrical wiring, suitable for high bandwidth Internet applications

### **SECURITY MADE EASY**

Data encryption is quickly configured with the push of a button to keep intruders out

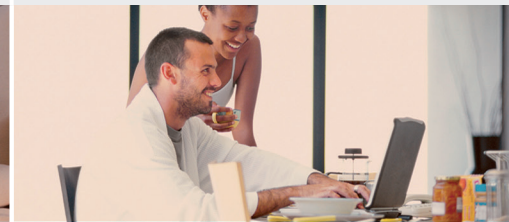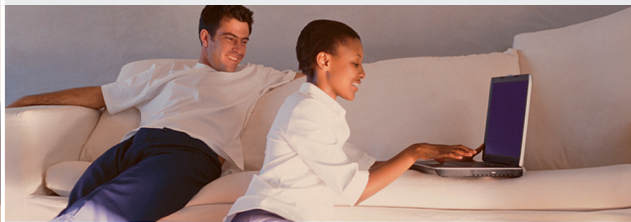

### **DATA TRANSMISSION OVER ELECTRICAL WIRING**

The D-Link DHP-307AV Powerline HomePlug AV Starter Kit, compliant with the HomePlug AV standard, uses your home's existing electrical wiring to create a network or extend your existing network.<sup>1</sup> It turns every power outlet into a possible network connection to access digital media devices, game consoles, print servers, computers, and network storage devices throughout your home.

### **IDEAL FOR BANDWIDTH-INTENSIVE APPLICATIONS**

The DHP-307AV is capable of delivering data transfer rates of up to 200 Mbps.<sup>2</sup> This rapid transmission speed makes it ideal for bandwidth-intensive applications, guaranteeing smooth HD video streaming, VoIP calls, and lag-free online gaming experiences. This device provides ample network bandwidth, enabling digital home consumers to tap into existing electrical wiring for high-quality multimedia streaming.

### **CONVENIENT SETUP AND SECURE OPERATION**

The DHP-307AV plugs directly into a power outlet, and does not require any additional cables. Extend your home network by connecting multiple devices in the farthest corners of your home, or attach a switch or wireless access point to the adapter for additional connectivity. For convenient setup, an encryption key can be quickly configured with the push of a button. The adapter implements 128-bit AES data encryption to protect the network from unauthorized wire tapping. With hassle-free plug and play installation, the DHP-307AV is an ideal solution to create a wall-to-wall home network.

### **POWER SAVING FEATURE**


The DHP-307AV incorporates a power-saving mode to comply with the European Energy Using Product (EuP) Directive. If no data transmission or reception occurs over a certain period of time, the adapter will automatically go into sleep mode to save power, reducing power usage by more than 70% and allowing you to save energy automatically, without sacrificing performance.

### WHAT THIS PRODUCT DOES

With network data transfer rates of up to 200 Mbps, the DHP-307AV Powerline HomePlug AV Starter Kit allows you to connect computers, High-Definition TVs, networking devices, and gaming consoles using the most pervasive medium in your house - the electrical wiring. Share Internet connections and experience smooth file transfers, streaming multimedia, online gaming and more. The Powerline HomePlug AV Network Adapter features easy plug-and-play installation and can be connected to any Ethernet-enabled device.

### FAST TRANSMISSION USING YOUR HOME'S EXISTING WIRING

The Powerline HomePlug AV Network Adapter incorporates the latest technology to deliver up to 200 Mbps over a home's existing electrical wiring. This fast transmission speed provides ample bandwidth suitable for streaming high-quality video HDTV signals while simultaneously providing high-speed Internet access throughout the home.

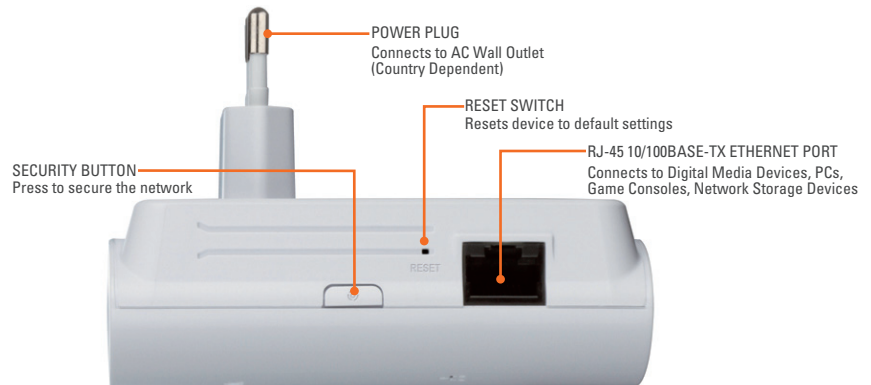

## TECHNICAL SPECIFICATIONS

#### STANDARDS

- IEEE 802.3
- IEEE 802.3u
- HomePlug AV

#### POWERLINE INTERFACE

- Power plug (country-dependent)

#### ETHERNET INTERFACE

- 10/100 BASE-TX Ethernet Port with auto MDI/MDIX
- RJ-45 Connector

#### POWERLINE MODULATION SCHEME

- OFDM Symbol Modulation

#### POWERLINE FREQUENCY BAND

- 2 to 30 MHz

#### DATA RATE

- Powerline: 200 Mbps (PHY rate)
- Ethernet: 10/100 Mbps (autonegotiation)

#### SECURITY

- 128-bit AES Data Encryption

#### MINIMUM SYSTEM REQUIREMENTS (FOR PC UTILITY SOFTWARE)

- PC with 200 MHz processor
- 64 MB memory
- Windows 7, Vista, XP SP2 or 2000 SP4; MAC OS 10.6, 10.5
- Ethernet interface (100 Mbps)

#### LEDS

- Power
- Powerline
- Ethernet

#### POWER INPUT

- 100 to 240 V AC, 50/60 Hz

#### POWER SAVING

- Power-saving mode supported
- Compliant with European Energy Using Product Directive

#### DIMENSIONS

- 100 x 70 x 34 mm  
(3.94 x 2.76 x 1.34 inches)

#### WEIGHT

- 114.1 g (0.25 lbs)

#### OPERATING TEMPERATURE

- 0 to 40 °C (30 to 104 °F)

#### OPERATING HUMIDITY

- 10% to 95% non-condensing

#### EMC CERTIFICATION

- CE EMC Class B

#### SAFETY CERTIFICATION

- CE LVD

<sup>1</sup> Power outlets and electrical wiring must all be part of the same electrical system. Certain electrical conditions in your home, such as wiring condition and configuration, may affect the performance of this product. Additional D-Link Powerline HomePlug AV adapters are required to add new devices to the network. A minimum of two D-Link Powerline HomePlug AV Network Adapters are required to create a network. Connecting this product to a power strip with a surge protector may adversely affect the performance of this product. For best results, plug the adapter directly into a wall outlet.

<sup>2</sup> Maximum throughput based on theoretical transmission PHY rate. Actual data throughput will vary. Network conditions and environmental factors, including volume of traffic and network overhead, may lower actual data throughput rate. Interference from devices that emit electrical noise, such as vacuum cleaners and hair dryers, may adversely affect the performance of this product. This product may interfere with devices such as lighting systems that have a dimmer switch or a touch-sensitive on/off feature, short wave radios, or other Powerline devices that do not follow the HomePlug AV standard.



D-Link Corporation  
No. 289 Xinhu 3rd Road, Neihu, Taipei 114, Taiwan  
Specifications are subject to change without notice.  
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.  
All other trademarks belong to their respective owners.  
©2012 D-Link Corporation. All rights reserved.  
Release 01 (January 2012)