



POWERLINE AV 500 ADAPTER

QUALITY OF SERVICE



Prioritized traffic for smooth streaming multimedia, online games, and VoIP calls

RAPID SPEEDS OVER ELECTRICAL WIRING

Speeds of up to 500 Mbps over home electrical wiring, suitable for high bandwidth Internet applications

SECURITY MADE EASY

Data encryption is quickly configured with the push of a button to keep intruders out

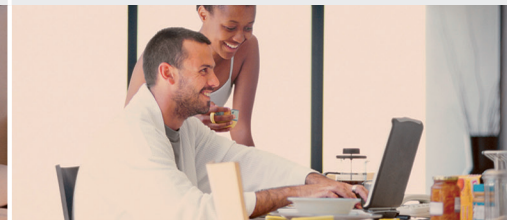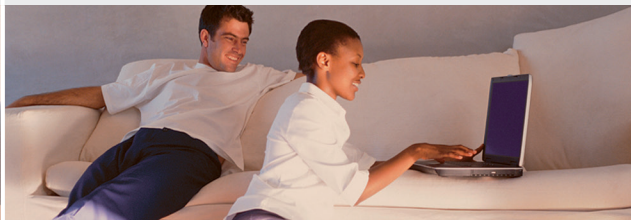

DATA TRANSMISSION OVER ELECTRICAL WIRING

The D-Link DHP-500AV Powerline AV 500 Adapter uses your home's existing electrical wiring to create a network or extend your existing network.¹ It turns every power outlet into a possible network connection to access digital media devices, game consoles, print servers, computers, and network storage devices throughout your home. Compliance with the IEEE 1901 standard and backward compatibility with the Homeplug AV ensure that the DHP-500AV can be used with older powerline devices.

IDEAL FOR BANDWIDTH-INTENSIVE APPLICATIONS

The DHP-500AV is capable of delivering data transfer rates of up to 500 Mbps.² This rapid transmission speed makes it ideal for bandwidth-intensive applications, guaranteeing smooth HD video streaming, VoIP calls, and lag-free online gaming experiences. In addition, it prioritizes Internet traffic, ensuring that multimedia applications do not experience performance glitches while web surfing and downloading files. Now you can experience high-quality multimedia streaming throughout your home, all through your existing electrical wiring.

CONVENIENT SETUP AND SECURE OPERATION

The DHP-500AV plugs directly into a power outlet, and does not require any additional cables. Extend your home network by connecting multiple devices in the farthest corners of your home, or attach a switch or wireless access point to the adapter for additional connectivity. For convenient setup, an encryption key can be quickly configured with the push of a button. The adapter implements 128-bit AES data encryption to protect the network from unauthorized wire tapping. With hassle-free plug and play installation, the DHP-500AV is an ideal solution to create a wall-to-wall home network.

POWER SAVING FEATURE


The DHP-500AV incorporates a power saving mode that automatically places the adapter in sleep mode if no data transmission or reception occurs over a certain period of time, reducing power usage by more than 50%.

WHAT THIS PRODUCT DOES

With network data transfer rates of up to 500 Mbps, the DHP-500AV allows you to connect computers, High-Definition TVs, networking devices, and gaming consoles using the cables already installed in every home - your electrical wiring. Share Internet connections and experience smooth file transfers, streaming multimedia, online gaming and more. The Powerline 500 Adapter features easy plug-and-play installation and can be connected to any Ethernet-enabled device.

FAST TRANSMISSION USING YOUR HOME'S EXISTING WIRING

The Powerline AV 500 Adapter incorporates the latest technology to deliver up to 500 Mbps over a home's existing electrical wiring. This fast transmission speed provides ample bandwidth suitable for streaming high-quality video HDTV signals while simultaneously providing high-speed Internet access throughout the home. With Quality of Service (QoS) support, the performance of applications which require real-time communication, such as VoIP phone calls and multiplayer online games, will not be compromised even while downloading Internet TV and music.

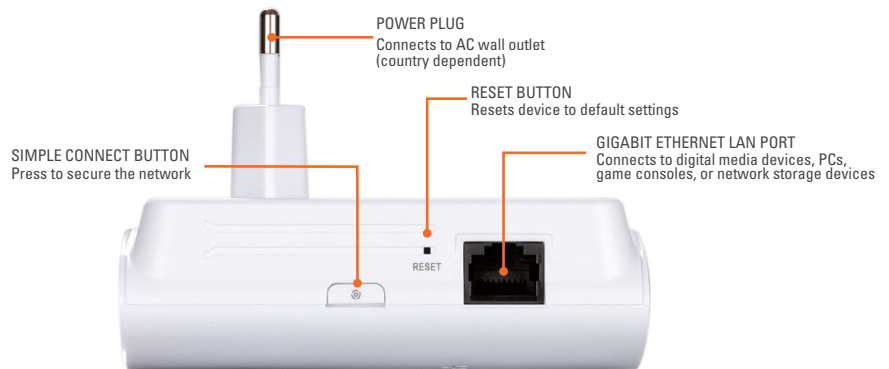

TECHNICAL SPECIFICATIONS

STANDARDS

- IEEE 802.3
- IEEE 802.3u
- IEEE 1901

POWERLINE INTERFACE

- Power plug (country-dependent)

ETHERNET INTERFACE

- Gigabit Ethernet LAN port
- RJ-45 connector

POWERLINE MODULATION SCHEME

- OFDM Symbol Modulation

POWERLINE FREQUENCY BAND

- 2 MHz to 70 MHz

DATA RATE

- Powerline: Up to 500 Mbps (PHY rate)
- Ethernet: 10/100/1000 Mbps (autonegotiation)

QoS

- Integrated QoS prioritizes media and data

SECURITY

- 128-bit AES data encryption

MINIMUM SYSTEM REQUIREMENTS (FOR PC UTILITY SOFTWARE)

- PC with 200 MHz processor
- 64 MB memory
- Windows 7, Vista, XP SP2, or 2000 SP4
- Ethernet interface (1000 Mbps)

LEDS

- Power
- Powerline
- Ethernet

POWER INPUT

- 100 to 240 V AC, 50/60 Hz

POWER SAVING

- Power saving mode supported

DIMENSIONS

- EU Plug: 100 x 70 x 34 mm (3.9 x 2.8 x 1.3 inches)
- UK Plug: 100 x 70 x 34 mm (3.9 x 2.8 x 1.3 inches)

WEIGHT

- EU Plug: 146.2 g (0.32 lb)
- UK Plug: 151 g (0.33 lb)

OPERATING TEMPERATURE

- 0 to 40 °C (30 to 104 °F)

OPERATING HUMIDITY


- 10% to 90% non-condensing

CERTIFICATIONS

- FCC Part 15 Class B
- CE EMC Class B
- UL
- CE LVD
- K21

¹ Power outlets and electrical wiring must all be part of the same electrical system. Certain electrical conditions in your home, such as wiring condition and configuration, may affect the performance of this product. Additional D-Link Powerline AV adapters are required to add new devices to the network. A minimum of two D-Link Powerline AV 500 Adapters are required to create a network. Connecting this product to a power strip with a surge protector may adversely affect the performance of this product. For best results, plug the adapter directly into a wall outlet.

² Maximum throughput based on theoretical transmission PHY rate. Actual data throughput will vary. Network conditions and environmental factors, including volume of traffic and network overhead, may lower actual data throughput rate. Interference from devices that emit electrical noise, such as vacuum cleaners and hair dryers, may adversely affect the performance of this product. This product may interfere with devices such as lighting systems that have a dimmer switch or a touch-sensitive on/off feature, short wave radios, or other Powerline devices that do not follow the HomePlug AV and IEEE 1901 standard.



D-Link Corporation
No. 289 Xinhua 3rd Road, Neihu, Taipei 114, Taiwan
Specifications are subject to change without notice.
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners.
©2012 D-Link Corporation. All rights reserved.
Release 02 (April 2012)