



RANGEBOOSTER N™ 650 ROUTER

TOTAL PERFORMANCE

Combines an award-winning QoS Engine and the latest 802.11n technology for total network performance

TOTAL SECURITY

Complete set of security features including Active Firewall and WPA/WPA2™ to protect your network

TOTAL COVERAGE

Provides greater wireless signal rates even at farther distances for best-in-class whole-home coverage



ULTIMATE PERFORMANCE

The D-Link RangeBooster N™ 650 Router DIR-635 is an 802.11n compliant device that delivers real world performance of up to 650% faster than an 802.11g wireless connection and faster than 100 Mbps wired Ethernet¹. Connect the RangeBooster N™ 650 Router to a cable or DSL modem and share your high-speed Internet access with everyone on the network. Create a secure wireless network to share photos, files, music, video, printers, and network storage throughout your home. With its built-in award-winning QoS Engine, this router provides a better Internet experience by keeping digital phone calls (VoIP calls) and online gaming smooth and responsive.

EXTENDED WHOLE HOME COVERAGE

Powered by RangeBooster N™ 650 technology, this high performance router provides superior whole-home coverage while eliminating dead spots. The RangeBooster N™ 650 Router is designed for use in bigger homes and for users that demand higher performance networking. Add a RangeBooster N™ 650 notebook or desktop adapter and stay connected to your network from virtually anywhere in your home.

TOTAL NETWORK SECURITY

The RangeBooster N™ 650 Router supports all of the latest wireless security features to prevent unauthorized access, be it from over the wireless network or from the Internet. Support for WPA™ and WEP standards ensures that you'll be able to use the best possible encryption, regardless of your client devices. In addition, the RangeBooster N™ 650 Router utilizes dual active firewalls (SPI and NAT) to prevent potential attacks from across the Internet.

HARD DRIVE, MULTIFUNCTION PRINTER SHARING, 3G MOBILE INTERNET CONNECTION


Using the SharePort™ Network USB Utility, you can connect an external hard drive or multifunction printer to the router's USB port to share disk space and printing or scanning functions among family members or a group of users. This USB port also supports 3G adapter connection, so you can connect your router to a 3G mobile service to provide Internet access to a group while travelling.

WHAT THIS PRODUCT DOES

Connect the D-Link RangeBooster N™ 650 Router to your cable or DSL modem and share your high-speed Internet connection with multiple computers in your home. This router creates a secure high-speed wireless network to share photos, files, music, video, printers, and storage. Get a better Internet experience and extend your network coverage with the D-Link RangeBooster N™ 650.

GET CONNECTED, STAY CONNECTED

Based on the latest 802.11n specifications, RangeBooster N™ 650 technology delivers real world performance of up to 650% faster than 802.11g and faster than a 100 Mbps wired Ethernet connection¹. It delivers wireless signals at farther distances for best-in-class whole-home coverage. Transfer files faster across your network and access the Internet from virtually anywhere in your home by adding a RangeBooster N™ 650 adapter to your desktop or notebook PC.

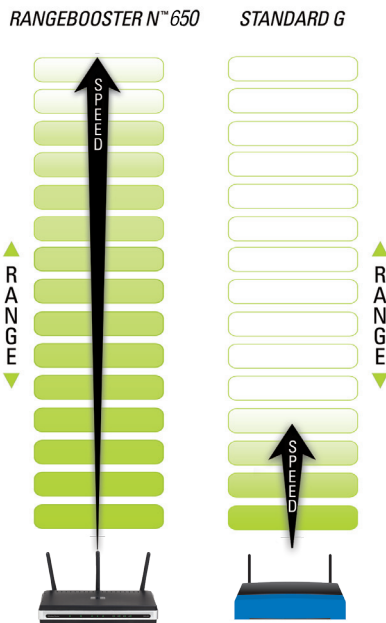

TECHNICAL SPECIFICATIONS

STANDARDS

- IEEE 802.11n
- IEEE 802.11g
- IEEE 802.11b
- IEEE 802.3
- IEEE 802.3u

DEVICE INTERFACES

- 4 10/100 LAN ports
- 1 10/100 WAN port
- IEEE 802.11 b/g/n WLAN
- USB 2.0

ANTENNAS

- 3 detachable 2 dBi dipole antennas (with RP-SMA connectors)

SECURITY

- 64/128-bit WEP
- Wi-Fi Protected Access (WPA, WPA2)
- MAC/IP address filtering (user access control)
- URL filtering/domain blocking/scheduling (parental control)

FIREWALL

- Network Address Translation (NAT)
- Stateful Packet Inspection (SPI)
- VPN pass-through / Multi-sessions PPP/L2TP/IPSec

QoS

- QoS Engine for prioritizing traffic
- Wireless Intelligent Stream Handling (WISH)

SHAREPORT™ FUNCTION SUPPORT

- Allows connection of external hard drive, multifunction printer, or mobile 3G adapter to USB port
- Allows sharing of HD space, printing and scanning functions²

DEVICE MANAGEMENT AND MONITORING

- Internet Explorer 6 or later, Mozilla Firefox v.2.0 or later, or other Java-enabled browser
- UPnP support
- WCN (Wireless Connect Now) support
- DDNS (Dynamic DNS)
- D-Link Network Monitor Yahoo! Widget
- D-Link Internet Usage Meter Yahoo! Widget

MINIMUM SYSTEM REQUIREMENTS

- Computer with:
 - Pentium 3 800 GHz or better processor
 - 256 MB RAM or higher
 - Windows XP SP2/Vista/7, Mac OS X v10.4 or higher
 - CD-ROM drive
 - SharePort™ Network USB Utility

POWER INPUT

- 5 V DC 2.5 A through external power adapter

LEDs

- Power
- Status
- WAN
- WLAN
- USB
- LAN (10/100) (per port)

DIMENSIONS

- 116.84 x 193.04 x 30.48 mm (4.6 x 7.6 x 1.2 inches)

WEIGHT

- 368.3 grams (0.8 lb)

CERTIFICATIONS

- FCC Class B
- CE
- C-Tick
- IC
- Wi-Fi Certified
- Wi-Fi Protected Setup (WPS)

¹ Maximum wireless signal rate derived from IEEE standard 802.11g and 802.11n specifications. 802.11n speeds obtainable when operating among RangeBooster N™ products. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, can lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

² HD and multifunction equipment can only be accessed by a single user at a time.

All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.



D-Link Corporation
 No. 289 Xinhua 3rd Road, Neihu, Taipei 114, Taiwan
 Specifications are subject to change without notice.
 D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
 All other trademarks belong to their respective owners.
 ©2010 D-Link Corporation. All rights reserved.
 Release 07 (December 2010)