



How to upgrade the firmware in the DSN-1100-10

[Topology]:


PC(192.168.1.111)-----(192.168.1.1)DSN-1100-10

[Procedure]:

1. Go to the D-Link Support Web site (support.dlink.com).
2. Select your product model number from the pull-down menus.
3. Select the firmware topic.
4. Download the firmware.
5. When prompted to save the firmware file, click Save and save the file to a desired location.
6. Launch the XStack Storage Web Manager as follows:

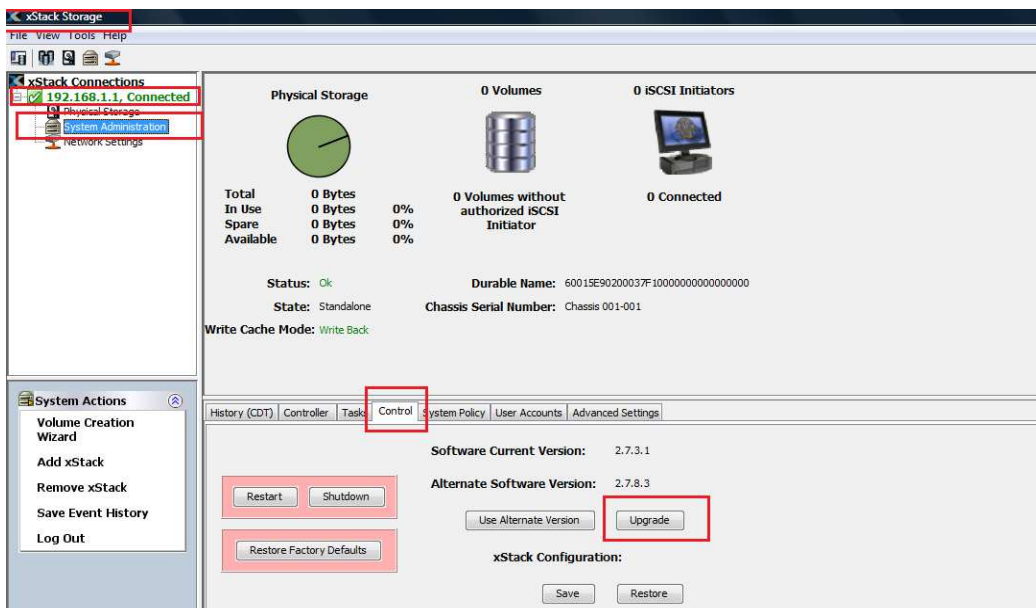
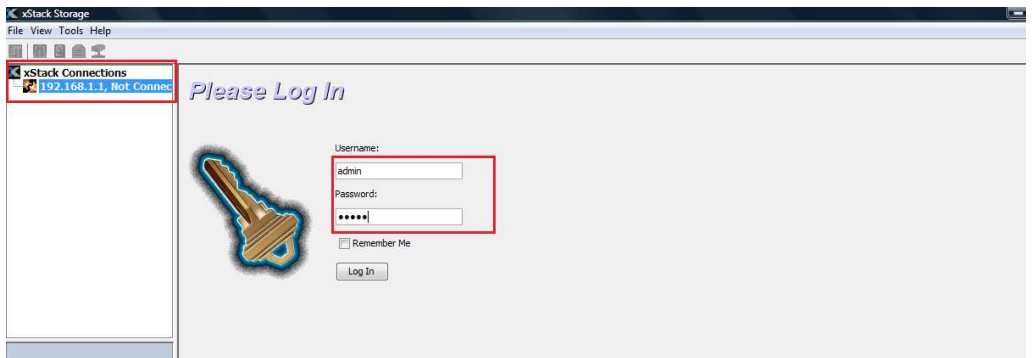


7. On the View menu, click firmware **upgrade**. The message will be display.

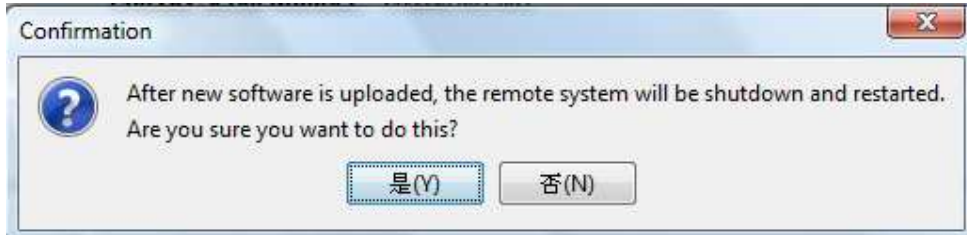

Note: Please make sure the Windows firewall will be turned off.

8.Click "OK" to continue. If you click "OK", the Open dialog box appears as follows:

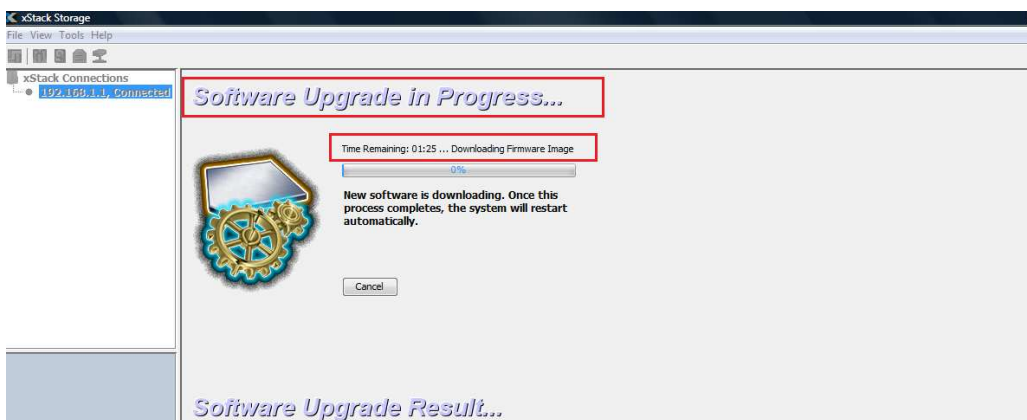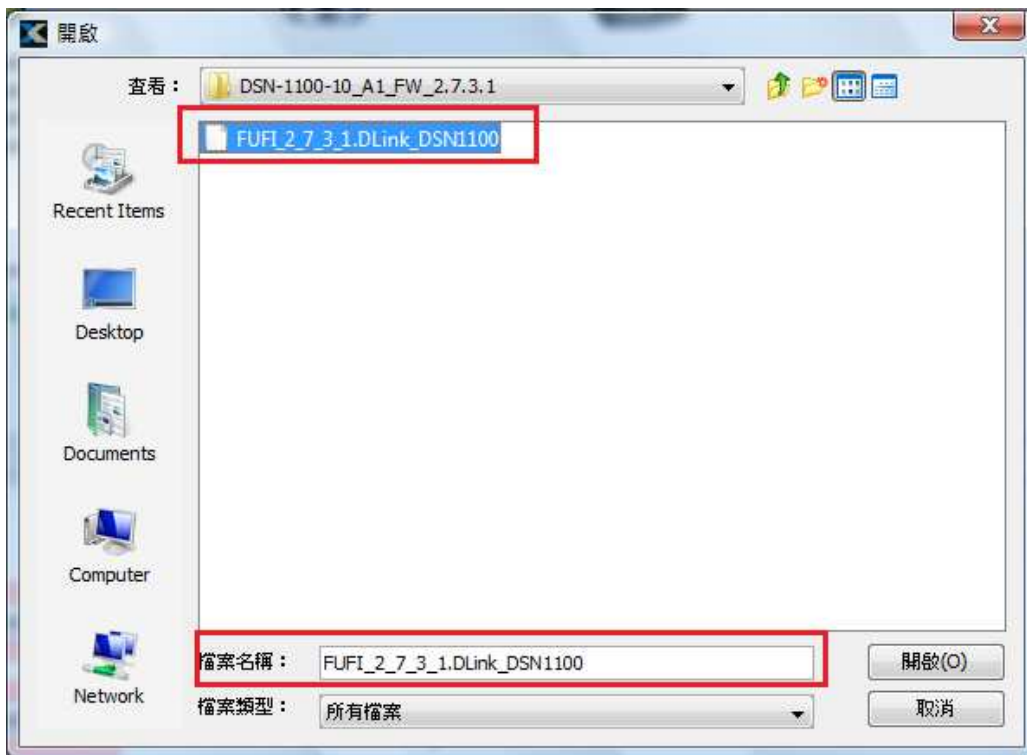

Testing result:

- xStack Connections
- 192.168.1.1, Connected
- Physical Storage
- System Administration
- Network Settings

Physical Storage



Total	0 Bytes	
In Use	0 Bytes	0%
Spare	0 Bytes	0%
Available	0 Bytes	0%

0 Volumes



0 Volumes without authorized iSCSI Initiator

0 iSCSI Initiators



0 Connected

Status: Ok

State: Standalone

Write Cache Mode: Write Back

Durable Name: 60015E90200037F10000000000000000

Chassis Serial Number: Chassis 001-001

- System Actions**
- Volume Creation Wizard
 - Add xStack
 - Remove xStack
 - Save Event History
 - Log Out

History (CDT) | Controller | Tasks | Control | **System Policy** | User Accounts | Advanced Settings

Software Current Version: 2.7.3.1

Alternate Software Version: 2.7.3.1

Restart | Shutdown

Restore Factory Defaults

Use Alternate Version | Upgrade

xStack Configuration:

Save | Restore