

A decorative graphic consisting of two overlapping squares. The front square is white with a thin black border, and the back square is a light gray color. They are positioned behind the main title text.

USB Modem Quick Installation Guide

Table of Contents

Introduction

- 3 Features
- 3 System Requirements
- 4 LEDs of Front Panel
- 4 Sockets of Rear Panel
- 4 Package Checklist

Installation

- 5 Hardware Installation
- 6 Installation Procedure for Windows 2000
- 6 Installation Procedure for Windows 98
- 7 Installation Procedure for Windows ME
- 7 Installaiton Procedure for Windows XP

Modem Dailing Location

- 8 For WIN 2000/XP
- 8 For WIN 98/ME

Introduction

Features

This modem supports the following communication standards. ITU-T is also known as CCITT.

Data

V.92

V.90, V.34, V.32bis, V.32, V.22bis, V.21, V.22

Bell 103 & 212A

V.44, V.42bis & MNP 5 (Data compression)

V.42 & MNP2-4 (Error correction)

Fax

V.17 (14400bps FAX)

V.29 (9600bps FAX)

V.27 (4800bps FAX)

Voice

Voice/Audio mode.

Full-Duplex speaker phone

System Requirements

Windows 98, Windows 2000,

Windows ME, Windows XP

USB Port

LEDs of Front Panel

DATA	Data Transmission indicator
CD	Carrier Detect indicator
OH	Off Hook
MR	Modem Ready
PWR	Power Ready

Sockets of Rear Panel


PHONE	Phone jack
LINE	Telephone line jack
USB	USB Connector
MIC	Microphone jack
SPK	Speaker (for Stereo only) jack

Package Checklist

One USB modem/ One USB cable/ One Phone Cable
One CD Driver/ User's manual

Installation

Hardware Installation

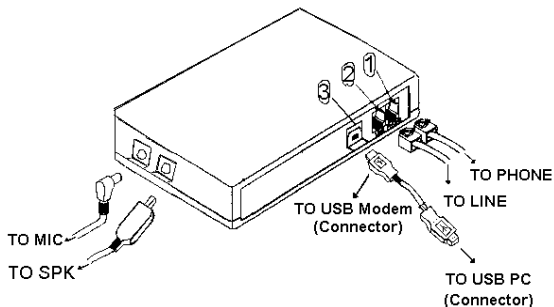

1. Plug the device terminal of the USB cable into the connector marked (3) on the back of the modem.
2. Plug the other end of this cable into the USB port on the back of your computer .
3. Plug one end of the phone cable into the modem's LINE jack (2) . Plug the other end into the phone outlet.
4. To use telephone and the modem on the same line, plug one end of the optional phone cable into the PHONE jack (1) on the modem; plug the other end into the phone. Lift the telephone handset and listen for a DIAL TONE to check the connection.

Installation Procedures for Windows 2000

1. Once you have completed the hardware installation, switch on your computer and put the CD into the CD-ROM. The wizard searches for new hardware. Click Next.
2. Select Search for a suitable driver for my device (recommended) and click Next.
3. Select Specify a location and click Next.
4. Click Browse to search for driver files and open it. e.g., D:\DRIVER\win2000. Click OK.
5. Windows found the driver of this modem. Click Next.
6. Click Yes for Digital Signature.
7. Click Finish to complete the installation .

Installation Procedures for Windows 98

1. Once you have completed the hardware installation, switch on your computer and put the CD into the CD-ROM. The wizard searches for new hardware. Click Next.
2. Select the Search for the best driver for your device (Recommended) and click Next.
3. Select Specify a location (Please click Browse to search for driver files and open it. e.g., D:\DRIVER\win98) and click Next .
4. Windows found the driver of this modem. Click Next.
5. Click Finish to complete the installation .

Installation Procedures for Windows ME

1. Once you have completed the hardware installation, switch on your computer and put the CD into the CD-ROM. The wizard searches for new hardware. Select Specify the location of the driver (Advanced) and click Next.
2. Select Search for the best driver for your device (Recommended) and Specify a location. (Please click Browse to search for driver files and open it. e.g., D:\DRIVER\winme) and click Next.
3. Windows found the driver of this modem. Click Next.
4. Click Finish to complete the installation.

Installation Procedures for Windows XP

1. Once you have completed the hardware installation, switch on your computer and put the CD into the CD-ROM. The wizard searches for new hardware. Select install from a list or specific location (Advanced). Click Next.
2. Select Search for the best driver in these locations and Include this location in the search: (Please click Browse to search for driver files and open it. e.g., D:\DRIVER\WinXP) and click Next.
3. Click Continue Anyway.
4. Click Finish.

Modem Dialing Location

****If you want to change your dialing location, please follow the instructions:**

For WIN 2000/XP

Please click Control Panel->Phone And Modem Options ->Under Dialing Rules click Edit , and then you can change your location.



For WIN 98/ME

Please click Control Panel->Modems->Under General click Dialing Properties , and then you can change your location.

