

Product Page: DNS-313 Firmware Version: 1.00

D-Link

DNS-313	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Admin Password System Firmware Upgrade E-mail Alerts Power Management Dynamic DNS Logout	FIRMWARE UPGRADE : <p>A new firmware upgrade may be available for your DNS-313. It is recommended to keep your DNS-313 firmware up-to-date to maintain and improve the functionality and performance of your storage device.</p> <p>Click here D-Link Support Page to check for the latest firmware version available.</p> <p>To upgrade the firmware on your DNS-313, please download and save the latest firmware version from the D-Link Support Page to your local hard drive. Locate the file on your local hard drive by clicking the Browse button. Once you have found and opened the file using the browse button, click the Apply button to start the firmware upgrade.</p> <p>Apply Cancel</p> CURRENT FIRMWARE INFO : <p>Current Firmware Version : 1.00 Firmware Date : 09/18/2007 File Path : H:\dns-313_106\system.tgz <input type="button" value="Durchsuchen..."/></p>				Helpful Hints.. <p>Firmware updates are released periodically to maintain and improve the functionality of your DNS-313 and also to add features. If you run into a problem with a specific feature of the DNS-313, check our support site by clicking on the D-Link Support Page link and see if an updated firmware is available for your DNS-313.</p>

Um das Firmware Update durchzuführen, klicken Sie auf „**Durchsuchen**“ und geben den Pfad zur

Datei **system.tgz** an

Product Page: DNS-313 Firmware Version: 1.00

D-Link

DNS-313	SETUP	ADVANCED	MAINTENANCE	STATUS	SUPPORT
Admin Password System Firmware Upgrade E-mail Alerts Power Management Dynamic DNS Logout	FIRMWARE UPGRADE : <p>Firmware Upload Error!</p> <p>The uploaded file was not accepted by the DNS-313. Please return to the previous page and select a valid upgrade file.</p> <p><input type="button" value="Return"/></p>				Helpful Hints..

Sollten Sie diese Fehlermeldung bekommen, klicken Sie auf **Return** gehen Sie bitte wie folgt vor :

Product Page: DNS-313 Firmware Version: 1.00

D-Link

DNS-313	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Admin Password System Firmware Upgrade E-mail Alerts Power Management Dynamic DNS Logout	<p>FIRMWARE UPGRADE :</p> <p>A new firmware upgrade may be available for your DNS-313. It is recommended to keep your DNS-313 firmware up-to-date to maintain and improve the functionality and performance of your storage device.</p> <p>Click here D-Link Support Page to check for the latest firmware version available.</p> <p>To upgrade the firmware on your DNS-313, please download and save the latest firmware version from the D-Link Support Page to your local hard drive. Locate the file on your local hard drive by clicking the Browse button. Once you have found and opened the file using the browse button, click the Apply button to start the firmware upgrade.</p> <p><input type="button" value="Apply"/> <input type="button" value="Cancel"/></p> <p>CURRENT FIRMWARE INFO :</p> <p>Current Firmware Version : 1.00 Firmware Date : 09/18/2007 File Path : <input type="text" value="H:\dns-313_106\zImage"/> <input type="button" value="Durchsuchen..."/></p>				Helpful Hints.. Firmware updates are released periodically to maintain and improve the functionality of your DNS-313 and also to add features. If you run into a problem with a specific feature of the DNS-313, check our support site by clicking on the D-Link Support Page link and see if an updated firmware is available for your DNS-313.

Klicken Sie erneut auf „**Durchsuchen**“ und geben den Pfad zur Datei **zImage** an und bestätigen Sie mit **Apply**

Product Page: DNS-313 Firmware Version: 1.00

D-Link

DNS-313	SETUP	ADVANCED	MAINTENANCE	STATUS	SUPPORT
Admin Password System Firmware Upgrade E-mail Alerts Power Management Dynamic DNS Logout	<p>FIRMWARE UPGRADE :</p> <p>Firmware update successful. Please wait for the DNS-313 to complete the reboot process before login. This should take no more than a minute. Check the firmware version to verify the update.</p> <p><input type="button" value="Restart"/></p>				Helpful Hints..

Klicken Sie auf **Restart**

The DNS-313 is restarting. Please wait a moment.

109

Nun sollte auf der Vorderseite die obere LED grün leuchten. Warten Sie bis der Timer auf Null heruntergelaufen ist. Die DNS-313 ist jetzt nicht über die Weboberfläche erreichbar

Starten Sie dann die Datei **ClicknConnect.exe** , die sich auch in dem Archiv befindet.



Wählen Sie Ihre Sprache aus und klicken dann auf **START**

D-Link

DNS-313 Click 'n Connect Hauptmenü

- Installieren einer neuen Festplatte**
Bitte diesen Punkt wählen wenn Sie den DNS-313 zum ersten mal konfigurieren.
- Ändern der Einstellungen des DNS-313**
Wählen Sie bitte diesen Punkt wenn sie die DNS-313 schon konfiguriert haben und Änderungen an den Einstellungen vornehmen möchten.
- Reparieren einer unterbrochenen Konfiguration**
Wählen Sie bitte diesen Punkt wenn "neue Festplatte hinzufügen" nicht geklappt hat oder Sie diese erneut konfigurieren möchten

Um zu beginnen, wählen Sie bitte eine der Optionen aus und klicken Sie **NEXT (weiter)**

BEENDEN << ZURÜCK WEITER >>

Um eine Formatierung der Datenpartition (NTFS Format) zu verhindern, wählen Sie die Option **REPARIEREN einer unterbrochenen Konfiguration** aus und klicken auf **Weiter**

D-Link



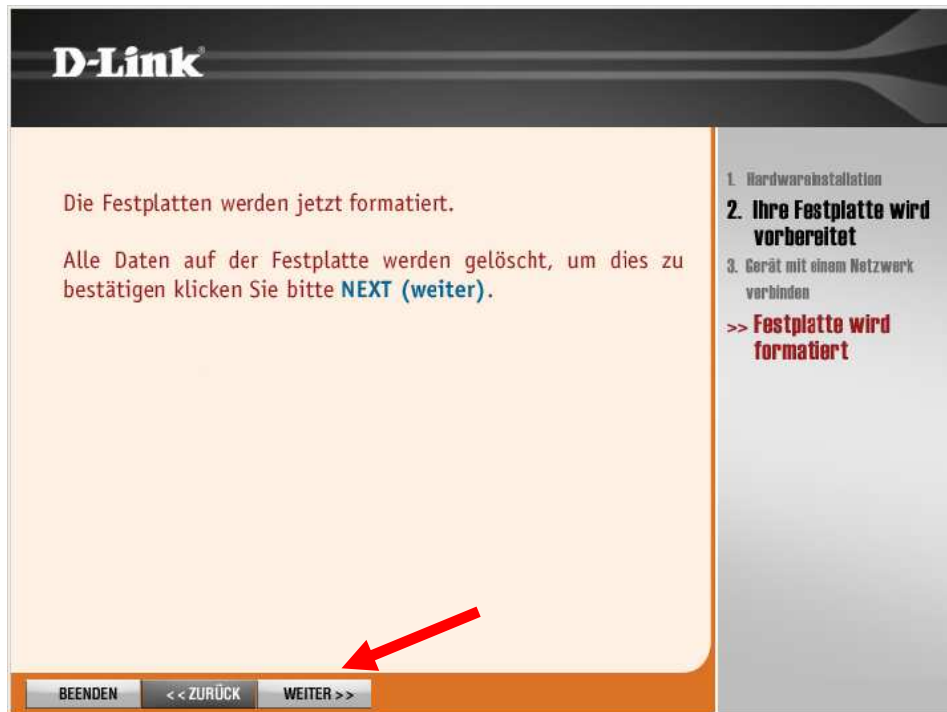

Schalten Sie bitte Ihren DNS-313 aus. Drücken Sie den **Reset Button** auf der Rückseite des Gerätes, halten Sie diesen gedrückt während Sie Ihre DNS-313 wieder einschalten. Stellen Sie bitte sicher dass die Power LED dabei leuchtet.

Halten Sie bitte den **Reset Button** solange gedrückt bis die HDD LED grün leuchtet und klicken dann **NEXT (weiter)**

1. Hardwareinstallation
 2. Ihre Festplatte wird vorbereitet
 3. Gerät mit einem Netzwerk verbinden
 >> **Schalten Sie das Gerät ein**

BEENDEN << ZURÜCK WEITER >>

Betätigen Sie mit **Weiter**, ohne diese Anweisungen durchzuführen.



Betätigen Sie mit **Weiter**

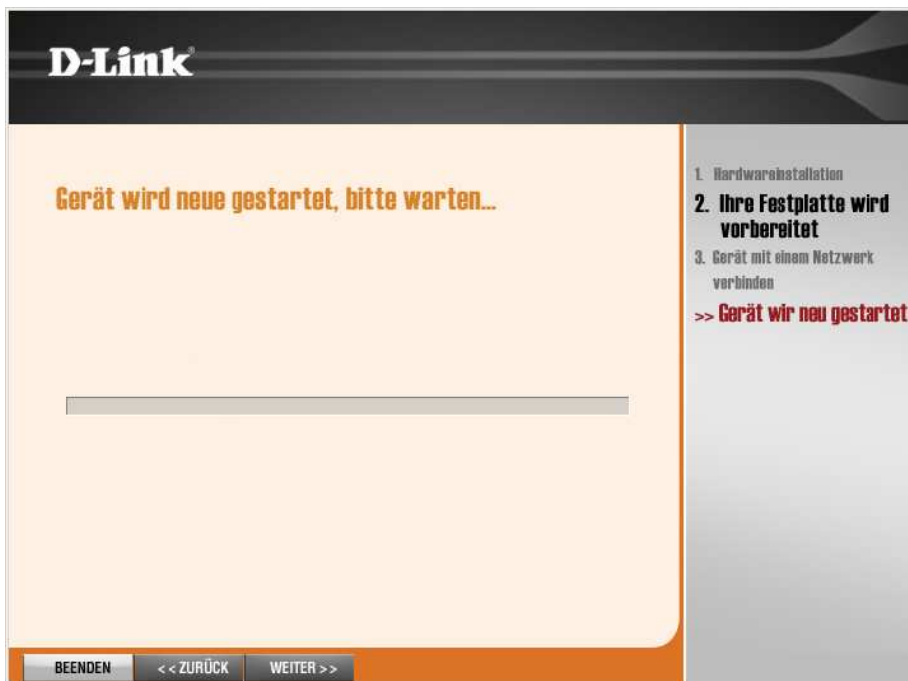


Von dieser Formatierung ist **NICHT** die NTFS (Daten) Partition betroffen !!!

Die Daten bleiben erhalten.



Klicken Sie auf **Weiter**



D-Link

Wählen Sie einen Laufwerksbuchstaben für Ihr Netzwerk-Speichergerät aus.

Laufw. Buchstabe
Vorhandene Laufw.buchstaben

Y:

Sie können Ihr Netzwerk-Speichergerät auch umbenennen. Klicken Sie anschließend auf **WEITER**.

Gerätename

BEENDEN << ZURÜCK WEITER >>

1. Hardwareinstallation
2. Ihre Festplatte wird vorbereitet
3. Gerät mit einem Netzwerk verbinden
>> Gerät im Netzwerk verbinden

Soll die DNS-313 nicht automatisch als Netzlaufwerk klicken Sie hier auf **Beenden** anderenfalls auf **Weiter**

DNS-313	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Admin Password	FIRMWARE UPGRADE :				Helpful Hints.. Firmware updates are released periodically to maintain and improve the functionality of your DNS-313 and also to add features. If you run into a problem with a specific feature of the DNS-313, check our support site by clicking on the D-Link Support Page link and see if an updated firmware is available for your DNS-313.
System	A new firmware upgrade may be available for your DNS-313. It is recommended to keep your DNS-313 firmware up-to-date to maintain and improve the functionality and performance of your storage device.				
Firmware Upgrade	Click here D-Link Support Page to check for the latest firmware version available.				
E-mail Alerts	To upgrade the firmware on your DNS-313, please download and save the latest firmware version from the D-Link Support Page to your local hard drive. Locate the file on your local hard drive by clicking the Browse button. Once you have found and opened the file using the browse button, click the Apply button to start the firmware upgrade.				
Power Management	<input type="button" value="Apply"/> <input type="button" value="Cancel"/>				
Format Disk	CURRENT FIRMWARE INFO :				
Scan Disk	Current Firmware Version : 1.01				
Dynamic DNS	Firmware Date : 12/07/2007				
Logout	File Path : <input type="text"/> <input type="button" value="Durchsuchen..."/>				

Es wird nun die neue Firmware Version mit dem entsprechendem Datum angezeigt.