

Wireless 108G MIMO PCI Adapter

Accelerated Rates at Extended Range

- Enhanced Wireless Coverage With Smart Antenna Technology
- Up to 8x Better Wireless Range Coverage**
- Wireless Speeds Up to 108Mbps**
- Advanced Security Schemes
- Backward Compatible With 802.11b/g Devices

FEATURES

Accelerated Data Rates

- 802.11g Wireless Speeds
- Up to 54Mbps Wireless Data Transfer Rates *
- Wireless Speeds Up to 108Mbps **

Extended Signal Range

- Smart Antenna Technology
- Up to 8x Better Wireless Range Coverage **
- 2 Built-in Antennas

Wireless Security - 64/128-bit

WEP data encryption

- WPA-PSK (Pre-Shared Key)

* Maximum wireless signal rate derived from IEEE standard 802.11g. Actual data throughput will vary. Network conditions and environmental factors lower actual data throughput rate.

** Up to 108Mbps when operating with other wireless 108G MIMO and AirPlusXtremeG products, up to 8x signal range when operating with other wireless 108G MIMO products.



With the D-Link DWL-G520M wireless 108G MIMO PCI adapter, your desktop computer can have a robust wireless connection at high speeds and extended range. This adapter uses D-Link's latest Smart Antenna MIMO (Multiple Input Multiple Output) technology to provide up to 8 times better radio signal coverage. Combined with wireless speeds of up to 108Mbps, this adapter gives you "Xcelerated Rates at Xtended Range", allowing you to effectively implement high-bandwidth applications such as audio and video streaming, on-line gaming and large file transfer over a wireless network.


Extended Wireless Operation Range. Operating on the 2.4GHz frequency band, the DWL-G520M sends information out over multiple high Gain antennas. Radio signals typically reflect off objects, creating multiple paths that in conventional radios cause interference and fading. The adapter uses these paths to carry more information, which is recombined on the receiving side by the MIMO algorithms. As a result, the adapter reduces "dead" spots and distributes strong wireless signals across farther distances with enough bandwidth to stream multimedia content and transfer large files at far higher rates. **

Up to 108Mbps Wireless Speed. The DWL-G520M doubles the spectral efficiency compared with the current wireless network. The maximum non-Turbo data transfer rate for 802.11g networks is 54Mbps, though actual throughput is typically closer to 20Mbps to 30Mbps. Enhanced by the Turbo mode, this adapter can boost the typical raw wireless speeds to 108Mbps, or a real throughput 15 times faster than that of 802.11b equipment. **

Seamless Operation. With backward compatibility to 802.11g and 802.11b industry standards, the DWL-G520M ensures your laptop computer complete interoperability with existing 2.4GHz wireless infrastructure. So whether at home, in an office or conference hall, you can stay connected and experience the full benefits of extended range and high speeds.

Secure Connection. The DWL-G520M supports both standard WEP and advanced WPA-Personal (WPA-PSK) data encryption. With 802.1x authentication support, this adapter can be deployed for computers in a secure work environment. For homes that do not incorporate a RADIUS server in their networks, security is provided in a convenient, automatic way (when used in conjunction with other 802.11g products). With this adapter, you will automatically receive a new key every time you connect, doing away with the inconvenience of manual WEP key input. A configuration utility will keep track of your most frequently accessed networks and their specific settings, so you can rejoin them without hassle.

Complete Wireless 108G MIMO Solution. D-Link offers a complete solution with wireless 108G MIMO adapters and routers. This allows you to obtain the best results with a true MIMO implementation on both ends of a connection.

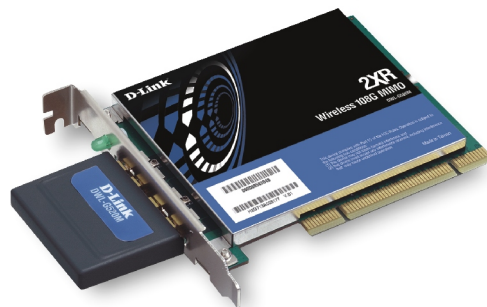



Product Specifications

Minimum System Requirements

- PC with 500MHz CPU
- 32-bit PCI slot
- Windows XP/2000
- 64MB memory

Wireless LAN Standards

- IEEE 802.11b
- IEEE 802.11g

Bus Type

- 32-bit PCI 2.2

Media Access Control

CSMA/CA with ACK

Wireless Frequency Range

2.4GHz to 2.4835GHz

Wireless Signal Rates

(With Automatic Fallback)

108Mbps (D-Link 108G), 54Mbps, 18Mbps, 6Mbps,
48Mbps, 12Mbps, 5.5Mbps, 36Mbps, 11Mbps, 2Mbps,
24Mbps, 9Mbps, 1Mbps

Modulation Technology

- Orthogonal Frequency Division Multiplexing (OFDM)
- Complementary Code Keying (CCK)
- QuadraPhase-Shift Keying (QPSK)
- Binary Phase Shift Keying (BPSK)

Receiver Sensitivity

- 54Mbps OFDM, 10% PER: -71dBm
- 48Mbps OFDM, 10% PER: -71dBm
- 36Mbps OFDM, 10% PER: -78dBm
- 24Mbps OFDM, 10% PER: -82dBm
- 18Mbps OFDM, 10% PER: -85dBm
- 12Mbps OFDM, 10% PER: -87dBm
- 11Mbps CCK, 8% PER: -85dBm
- 9Mbps OFDM, 10% PER: -90dBm
- 6Mbps OFDM, 10% PER: -91dBm
- 5.5Mbps CCK, 8% PER: -88dBm
- 2Mbps QPSK, 8% PER: -89dBm
- 1Mbps BPSK, 8% PER: -92dBm

Wireless Transmit Power

15dBm +/- 2dB

Antennas

Dual diversity switching antennas

Wireless Operating Range *

Indoors: Up to 100 m (328 ft)
Outdoors: Up to 400 m (1,312 ft)

* Environmental factors may adversely affect wireless signal range.

Wireless Security

- 64/128-bit WEP data encryption
- WPA-PSK (Pre-Shared Key)

Diagnostic LEDs

- Power
- Activity

Physical & Environmental

Maximum Power Consumption

802.11b:

- Transmit mode: 350mA
- Receive mode: 250mA
- Power save mode: 30mA 802.11g:
- Transmit mode: 400mA
- Receive mode: 300mA
- Power save mode: 30mA

Dimensions

154 (L) x 96 (W) 8 (H) mm

(height excluding mounting bracket, length including antennas)

Weight

150 grams (including mounting bracket and antennas)

Operating Temperature

0° to 55 °C (32° to 131°F)

Operating Humidity


95% maximum (non-condensing)

Emissions

- FCC Class B
- CE

O.S. Support

Windows XP/2000

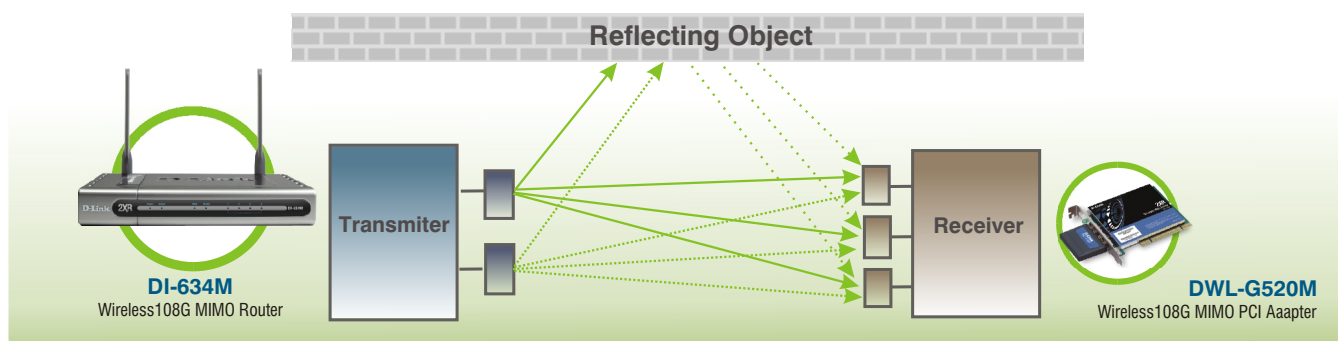


Wireless 108G MIMO (Multiple Input, Multiple Output)

RF Signals Transferred Through Multiple Input/Output for Increased Throughput and Reliability




Wireless 108G MIMO PCI Adapter

■ Faster Speeds *

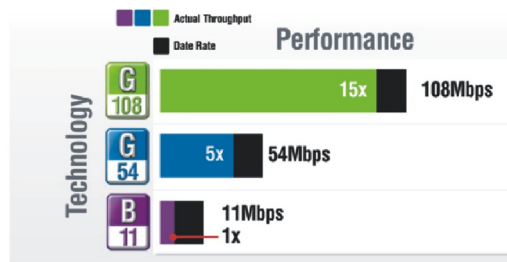

■ Better Coverage *

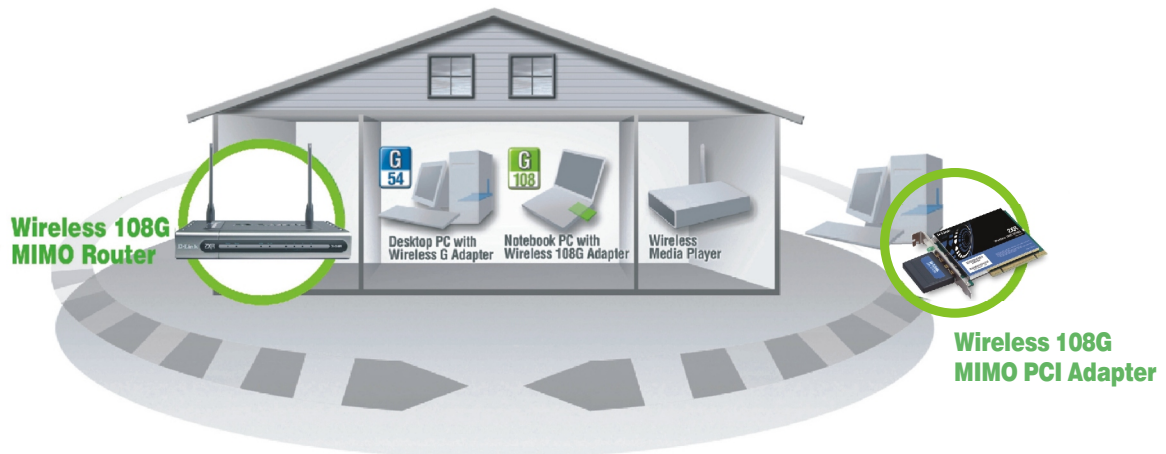

Faster Speeds at Farther Distances Than Basic 802.11g

D-Link Wireless 108G MIMO features Smart Antenna Technology to reduce "dead" spots and distribute strong wireless signals across farther distances with enough bandwidth to stream multimedia content and transfer large files at phenomenal rates.

* Up to 108Mbps when operating with other wireless 108G MIMO and AirPlus XtremeG products, up to 8x signal range when operating with other wireless 108G MIMO products.

D-Link Worldwide Offices

U.S.A.	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Luxemburg	TEL: 32-(0)2-517-7111	FAX: 32-(0)2-517-6500
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Poland	TEL: 48-(0)-22-583-92-75	FAX: 48-(0)-22-583-92-76
Europe (U. K.)	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	Hungary	TEL: 36-(0)-1-461-30-00	FAX: 36-(0)-1-461-30-09
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322
France	TEL: 33-1-30238688	FAX: 33-1-30238689	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	India	TEL: 91-022-26526696	FAX: 91-022-26528914
Belgium	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500	Middle East (Dubai)	TEL: 971-4-3916480	FAX: 971-4-3908881
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Turkey	TEL: 90-212-289-56-59	FAX: 90-212-289-76-06
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	Egypt	TEL: 202-414-4295	FAX: 202-415-6704
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Norway	TEL: 47-99-300-100	FAX: 47-22-309580	LatinAmerica	TEL: 56-2-232-3185	FAX: 56-2-232-0923
Finland	TEL: 358-9-2707 5080	FAX: 358-9-2707-5081	Brazil	TEL: 55-11-218-59300	FAX: 55-11-218-59322
Spain	TEL: 34-93-4090770	FAX: 34-93-4910795	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Portugal	TEL: 351-21-8688493		Russia	TEL: 7-095-744-0099	FAX: 7-095-744-0099 #350
Czech Republic	TEL: 420-(603)-276-589		China	TEL: 86-10-58635800	FAX: 86-10-58635799
Switzerland	TEL: 41-(0)-1-832-11-00	FAX: 41(0)-1-832-11-01	Taiwan	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515
Greece	TEL: 30-210-9914 512	FAX: 30-210-9916902	Headquarters	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299

Rev. 01 (June 2005)

Specifications subject to change without prior notice.
D-Link is a registered trademark and Smart Antenna and AirPlus XtremeG are trademarks of D-Link Corporation/D-Link System Inc.
All other trademarks belong to their proprietors.