

## Product Highlights

### Power More Devices

Eight Power over Ethernet (PoE) ports allow you to power more PoE-capable cameras, access points, and VoIP phones using standard Ethernet cabling

### Powerful PoE

IEEE 802.3at PoE (up to 30 W per port) and a high-capacity 125 W PoE budget are perfect for 802.11ac devices and multi-featured IP cameras

### Gigabit Uplink Connections

One Gigabit Ethernet and one SFP uplink port allow for additional connections to storage or an uplink network



## DGS-1010MP

# 10-Port Gigabit PoE Switch

## Features

### High-Speed Networking

- Eight 10/100/1000 Mbps PoE Ethernet access ports
- One Gigabit Ethernet and one SFP uplink port for uplink connections
- Full/half-duplex for 10/100 Mbps Ethernet and full-duplex for 1000 Mbps Ethernet

### Reliability

- IEEE 802.3x Flow Control
- Store-and-forward switching scheme
- RoHS compliant

### Easy Setup

- Plug and play installation
- Auto MDI/MDI-X crossover on all ports

### Desktop and Rackmount Design

- Rack-mountable 11" metal casing (1U)
- Fanless design

### PoE Functionality

- IEEE 802.3at-compliant
- 125 W total power budget
- Up to 30 W power output per port

The D-Link DGS-1010MP 10-Port Gigabit PoE Switch is an ideal solution for small offices and enterprise environments looking to expand the network with a set of Power over Ethernet devices such as wireless access points, IP cameras, and IP phones. Built with small business and enterprise users in mind, the DGS-1010MP is a high-speed, flexible switch that features a fanless, quiet design so it can be conveniently placed anywhere in a working environment.

## Power Over Ethernet

The DGS-1010MP features eight 10/100/1000BASE-T ports that support the IEEE 802.3at Power over Ethernet (PoE) standard. Each of the eight PoE ports can supply up to 30 W, with a total combined PoE budget of 125 W, allowing users to power up to four IEEE 802.3at-compliant devices without requiring an additional power supply. This allows devices to be installed in locations without any power outlets, saving on installation costs and reducing the time it takes to install new devices.

## Superior Performance

The DGS-1010MP is fully plug and play, meaning installation is quick and easy and requires no additional configuration. Support for Auto MDI/MDI-X on all ports eliminates the need for crossover cables when connecting to another switch or hub. Auto-Negotiation on each port senses the link speed of a network device (either 10, 100, or 1000 Mbps) and intelligently adjusts for optimal compatibility and performance. With store-and-forward switching, the DGS-1010MP also maximizes network performance while minimizing packet loss during data transmission. In addition, the DGS-1010MP features one Gigabit Ethernet and one SFP uplink port for high-speed connections to remote storage or for long distance fiber connections to an uplink network. Combining the convenience of PoE, superior performance, and ease of use, the DGS-1010MP is the ideal choice for flexibly expanding your network while remaining cost-efficient.


### Compact and Silent Design

The DGS-1010MP has a compact 11" design, so that it can be deployed in any easily accessible location on the work floor, allowing you to power a set of PoE-powered devices while avoiding additional cable clutter. Alternatively, the standardized 1U-sized housing means the switch can also be mounted in a standard 19" rack and be integrated in a server infrastructure. The DGS-1010MP is furthermore built around a fanless design. This makes the switch suitable to be used closer to, or in populated areas where it works efficiently while guaranteeing a quiet working environment.

### Green Technology

The DGS-1010MP supports IEEE 802.3az Energy-Efficient Ethernet (EEE), reducing power consumption of the switch when network utilization is low and minimizing operating costs during periods of inactivity. By using EEE-compliant devices with the DGS-1010MP, organizations can noticeably reduce power consumption by having the switch automatically put ports into sleep mode when they are not being used.

### Example Application Diagram

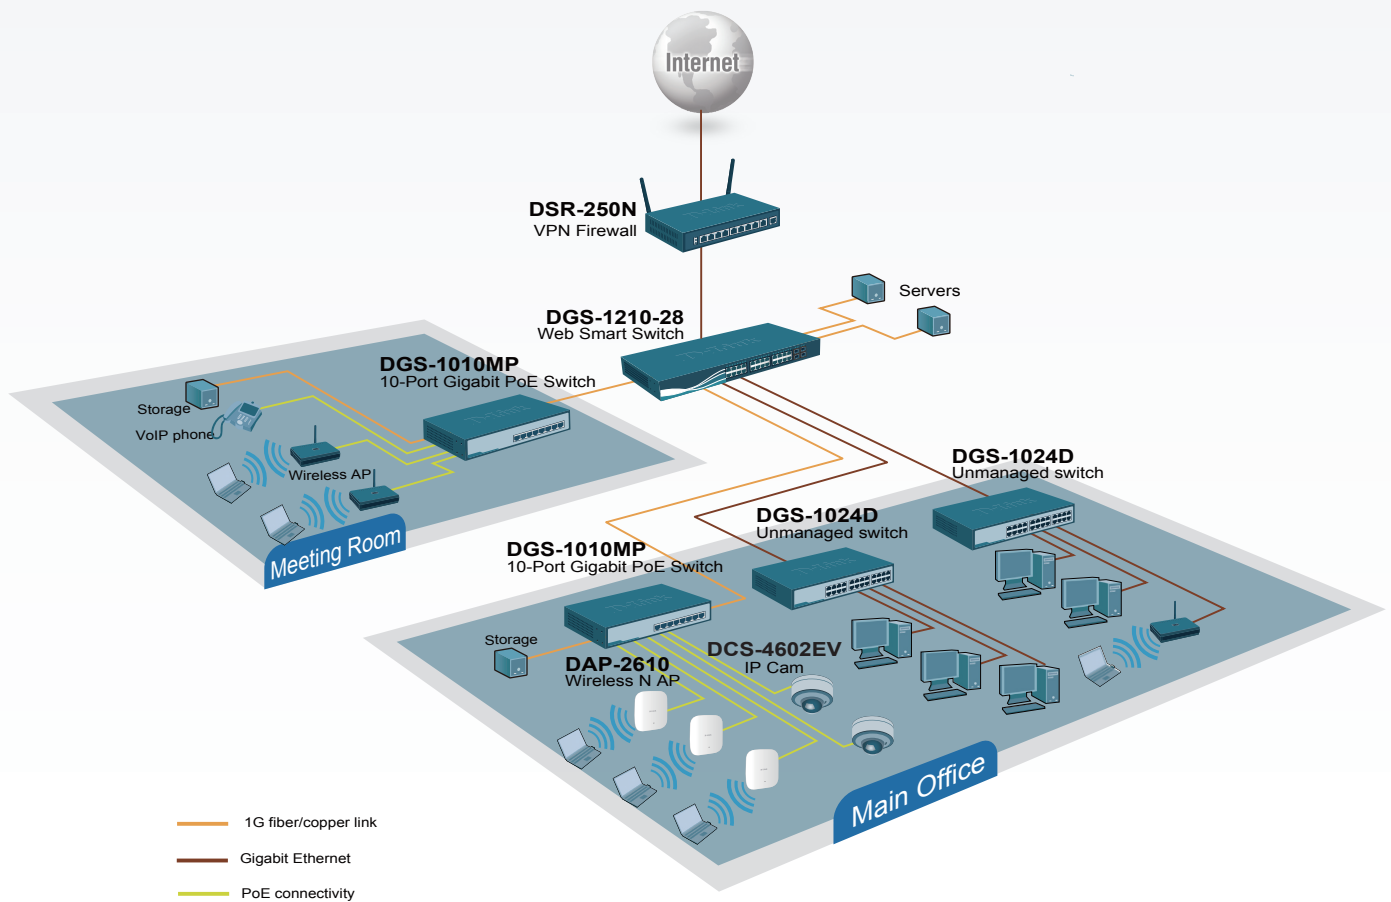

**Technical Specifications**

**General**

Size	• 11-inch desktop/rackmount size, 1U height		
Number of Ports	• 8 x 10/100/1000 Mbps PoE ports	• 1 x 10/100/1000 Mbps Ethernet uplink port • 1 x 100/1000 Mbps SFP uplink port	
Port Standards & Functions	<ul style="list-style-type: none"> <li>• IEEE 802.3i 10BASE-T Ethernet</li> <li>• IEEE 802.3u 100BASE-TX Fast Ethernet</li> <li>• IEEE 802.3ab 1000BASE-T Gigabit Ethernet</li> <li>• IEEE 802.3z Gigabit fiber</li> </ul>	<ul style="list-style-type: none"> <li>• IEEE 802.3at Power over Ethernet</li> <li>• IEEE 802.3az Energy-Efficient Ethernet</li> <li>• IEEE 802.3x Flow Control</li> <li>• ANSI/IEEE 802.3 NWay auto-negotiation</li> </ul>	
Switching Capacity	• 20 Gbps		
Media Interface Exchange	• Auto MDI/MDI-X		
Transmission Method	• Store-and-forward		
MAC Address Table	• 4K entries per device		
Packet Buffer Memory	• 1.5 Mb per device		
Packet Filtering / Forwarding Rates	<ul style="list-style-type: none"> <li>• Ethernet</li> <li>• 14,880 pps per port</li> </ul>	<ul style="list-style-type: none"> <li>• Fast Ethernet</li> <li>• 148,800 pps per port</li> </ul>	<ul style="list-style-type: none"> <li>• Gigabit Ethernet</li> <li>• 1,488,000 pps per port</li> </ul>
Data Transfer Rates	<ul style="list-style-type: none"> <li>• Ethernet</li> <li>• 10 Mbps (half-duplex)</li> <li>• 20 Mbps (full-duplex)</li> </ul>	<ul style="list-style-type: none"> <li>• Fast Ethernet</li> <li>• 100 Mbps (half-duplex)</li> <li>• 200 Mbps (full-duplex)</li> </ul>	<ul style="list-style-type: none"> <li>• Gigabit Ethernet</li> <li>• 2000 Mbps (full-duplex)</li> </ul>
Network Cables	<ul style="list-style-type: none"> <li>• 10BASE-T:</li> <li>• UTP Cat 3/4/5/5e (100 m max.)</li> <li>• EIA/TIA-586 100-ohm STP (100 m max.)</li> </ul>	<ul style="list-style-type: none"> <li>• 100BASE-TX</li> <li>• UTP Cat 5/5e (100 m max.)</li> <li>• EIA/TIA-568 100-ohm STP (100 m max.)</li> </ul>	<ul style="list-style-type: none"> <li>• 1000BASE-T</li> <li>• UTP Cat 5/5e (100 m max.)</li> <li>• EIA/TIA-568 100-ohm STP (100 m max.)</li> </ul>
<b>Physical</b>			
LED Indicators	<ul style="list-style-type: none"> <li>• Per port: activity / link and speed</li> <li>• Per port: power / status</li> </ul>	• Per device: PoE Max	
Dimensions	• 280 x 180 x 44 mm (11.02 x 7.08 x 1.73 in)		
Power Input	• 100 to 240 V AC, 50/60 Hz		
Maximum PoE Budget	• 125 W	• PoE up to 30 W per port	
Power Consumption	• 7.32 W (PoE off)	• 133.8 W (PoE on)	
Temperature	• Operating: 0 to 40 °C (32 to 104 °F)	• Storage: -10 to 70 °C (14 to 158 °F)	
Humidity	• Operating: 0% to 95% RH non-condensing	• Storage: 0% to 95% RH non-condensing	
EMI	<ul style="list-style-type: none"> <li>• CE Class A</li> <li>• FCC Class A</li> <li>• VCCI Class A</li> </ul>	<ul style="list-style-type: none"> <li>• CCC Class A</li> <li>• FCC Class A</li> </ul>	
Safety	<ul style="list-style-type: none"> <li>• cUL</li> <li>• CB</li> </ul>	<ul style="list-style-type: none"> <li>• CCC</li> <li>• LVD</li> </ul>	

# DGS-1010MP 10-Port Gigabit PoE Switch

Optional SFP Transceivers	
DEM-310GT	1000BASE-LX Single-mode, 10 km
DEM-311GT	1000BASE-SX Multi-mode, 550 m
DEM-312GT2	1000BASE-SX Multi-mode, 2 km
DEM-314GT	1000BASE-LHX Single-mode, 50 km
DEM-315GT	1000BASE-ZX Single-mode, 80 km
DEM-330T/R	Gigabit WDM transceiver, single-mode 10 km
DEM-331T/R	Gigabit WDM transceiver, single-mode 40 km
DEM-211	100BASE-FX, multi-mode, 2 km
DGS-712	1000 BASE-T Copper SFP Transceiver
Order Information	
<i>Part Number</i>	<i>Description</i>
DGS-1010MP	10-Port Gigabit PoE Switch

Updated 2022/06/06